


# PROBLEM SUMMARY

Sample Rating Trend



ISO

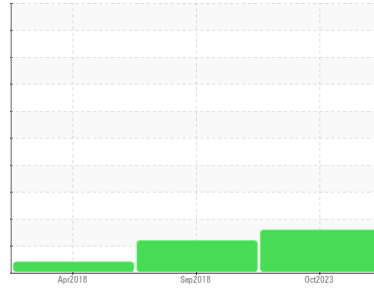


Machine Id  
**KAESER SFC 160 5704973 (S/N 1003)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

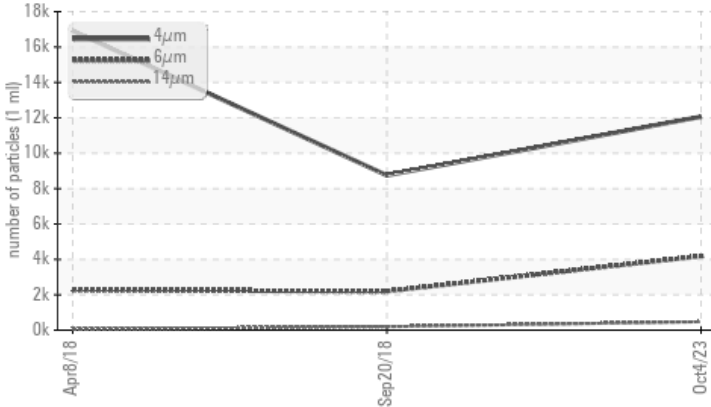

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	ABNORMAL	ATTENTION
Particles >6µm	ASTM D7647	>1300	▲ <b>4183</b>	▲ 2199	▲ 2268
Particles >14µm	ASTM D7647	>80	▲ <b>476</b>	▲ 194	57
Particles >21µm	ASTM D7647	>20	▲ <b>54</b>	▲ 55	13
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ <b>21/19/16</b>	▲ 18/15	▲ 18/13

Customer Id: ARCHAMKC  
Sample No.: KC06010803  
Lab Number: 06010803  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 20 Sep 2018 Diag: Angela Borella

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



---

### 08 Apr 2018 Diag: Angela Borella

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Machine Id  
**KAESER SFC 160 5704973 (S/N 1003)**  
Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

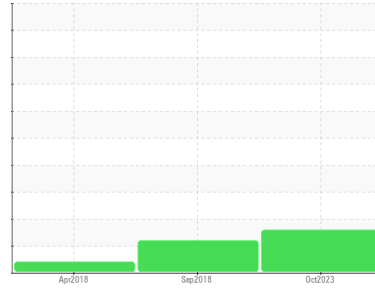

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KC06010803</b>	KC79150	KC62897
Sample Date	Client Info	<b>04 Oct 2023</b>	20 Sep 2018	08 Apr 2018
Machine Age	hrs	<b>33533</b>	5467	1921
Oil Age	hrs	<b>0</b>	5467	1921
Oil Changed	Client Info	<b>N/A</b>	Not Changd	Changed
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ATTENTION

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	<b>1</b>	<1	<1
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>6</b>	<1	<1
Lead	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >50	<b>6</b>	3	1
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m 90	<b>&lt;1</b>	0	25
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 90	<b>1</b>	35	65
Calcium	ppm	ASTM D5185m 2	<b>0</b>	0	5
Phosphorus	ppm	ASTM D5185m	<b>319</b>	0	43
Zinc	ppm	ASTM D5185m	<b>12</b>	8	7

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>0</b>	2	<1
Sodium	ppm	ASTM D5185m	<b>2</b>	11	16
Potassium	ppm	ASTM D5185m >20	<b>0</b>	5	35
Water	%	ASTM D6304 >0.05	<b>0.010</b>	0.024	0.012
ppm Water	ppm	ASTM D6304 >500	<b>107.9</b>	240	120






## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	<b>12064</b>	8748	16918
Particles >6µm	ASTM D7647 >1300	<b>▲ 4183</b>	▲ 2199	▲ 2268
Particles >14µm	ASTM D7647 >80	<b>▲ 476</b>	▲ 194	57
Particles >21µm	ASTM D7647 >20	<b>▲ 54</b>	▲ 55	13
Particles >38µm	ASTM D7647 >4	<b>2</b>	3	0
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13	<b>▲ 21/19/16</b>	▲ 18/15	▲ 18/13

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.34</b>	0.397	0.321

# OIL ANALYSIS REPORT

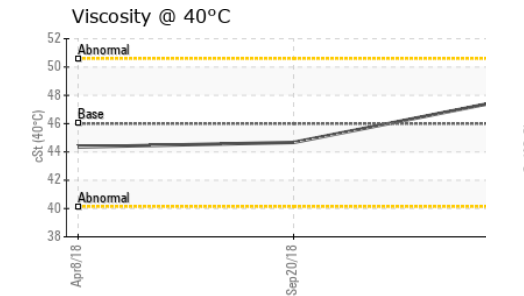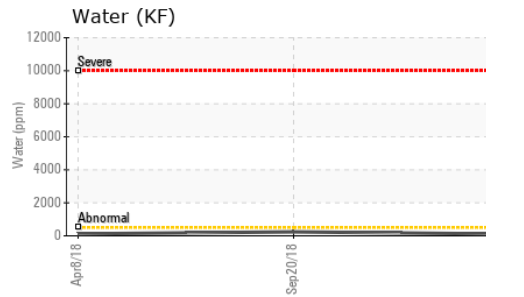
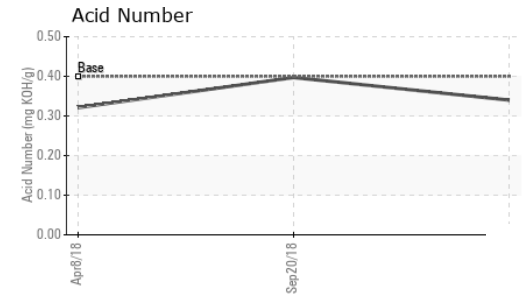
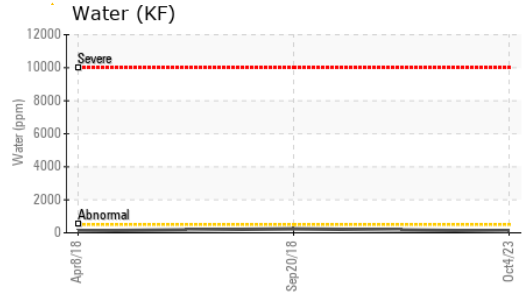
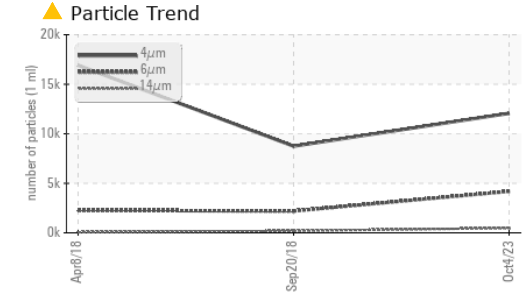


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	VLITE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	47.7	44.67	44.35

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

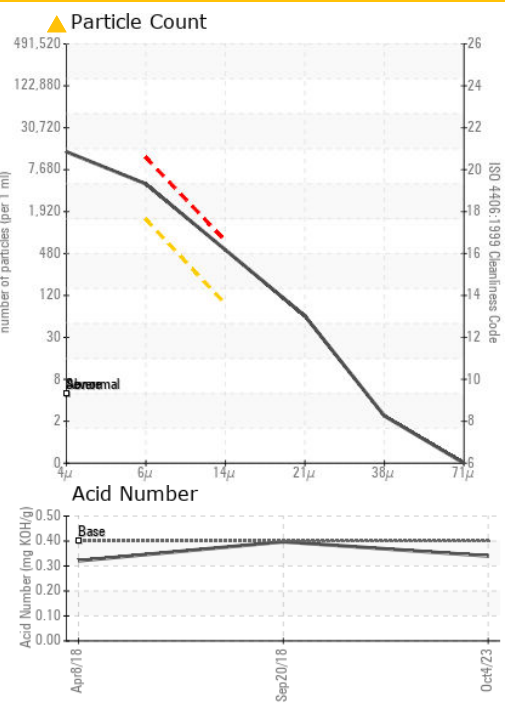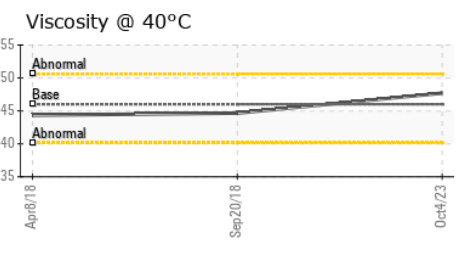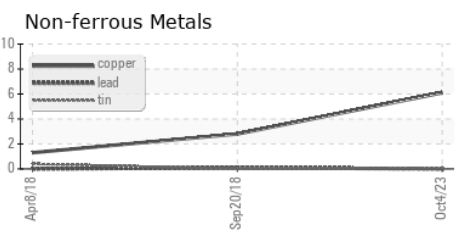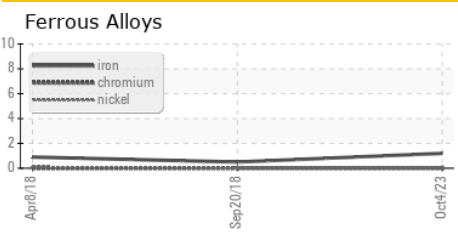

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC06010803  
**Lab Number** : 06010803  
**Unique Number** : 10749947  
**Test Package** : IND 2

**ARCELORMITTAL**  
 8650 MT ELLIOT ST  
 HAMTRAMCK, MI  
 US 48212  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: