

# **PROBLEM SUMMARY**

Sample Rating Trend

ISO


Machine Id **8234891 (S/N 1192)** 

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

## **COMPONENT CONDITION SUMMARY**

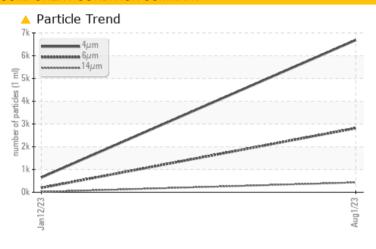

#### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS |              |         |                 |          |  |  |  |  |  |
|--------------------------|--------------|---------|-----------------|----------|--|--|--|--|--|
| Sample Status            |              |         | ABNORMAL        | NORMAL   |  |  |  |  |  |
| Particles >6µm           | ASTM D7647   | >1300   | <u>2817</u>     | 195      |  |  |  |  |  |
| Particles >14µm          | ASTM D7647   | >80     | <b>429</b>      | 17       |  |  |  |  |  |
| Particles >21µm          | ASTM D7647   | >20     | <b>140</b>      | 3        |  |  |  |  |  |
| Oil Cleanliness          | ISO 4406 (c) | >/17/13 | <b>20/19/16</b> | 17/15/11 |  |  |  |  |  |

**Customer Id: FLETRO** Sample No.: KC125301 Lab Number: 06010814 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

## **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS

12 Jan 2023 Diag: Don Baldridge

NORMAL




Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

T Sam



ISO

8234891 (S/N 1192)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

## DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                           |           |              | Jan2023      | Aug <sup>2</sup> 023 |             |          |
|---------------------------|-----------|--------------|--------------|----------------------|-------------|----------|
| SAMPLE INFORM             | MATION    | method       | limit/base   | current              | history1    | history2 |
|                           | 17 (11014 | Client Info  | III III Daoc | KC125301             | KC105759    | motory   |
| Sample Number Sample Date |           | Client Info  |              | 01 Aug 2023          | 12 Jan 2023 |          |
| Machine Age               | hrs       | Client Info  |              | 304                  | 177         |          |
| Oil Age                   | hrs       | Client Info  |              | 0                    | 177         |          |
| Oil Changed               | 0         | Client Info  |              | N/A                  | Changed     |          |
| Sample Status             |           |              |              | ABNORMAL             | NORMAL      |          |
| WEAR METALS               |           | method       | limit/base   | current              | history1    | history2 |
| Iron                      | ppm       | ASTM D5185m  | >50          | 0                    | <1          |          |
| Chromium                  | ppm       | ASTM D5185m  | >10          | 0                    | 0           |          |
| Nickel                    | ppm       | ASTM D5185m  | >3           | 0                    | 0           |          |
| Titanium                  | ppm       | ASTM D5185m  | >3           | 0                    | 0           |          |
| Silver                    | ppm       | ASTM D5185m  | >2           | 0                    | 0           |          |
| Aluminum                  | ppm       | ASTM D5185m  | >10          | 0                    | 0           |          |
| Lead                      | ppm       | ASTM D5185m  | >10          | 0                    | 0           |          |
| Copper                    | ppm       | ASTM D5185m  | >50          | <1                   | <1          |          |
| Tin                       | ppm       | ASTM D5185m  | >10          | 0                    | <1          |          |
| Vanadium                  | ppm       | ASTM D5185m  |              | 0                    | 0           |          |
| Cadmium                   | ppm       | ASTM D5185m  |              | 0                    | 0           |          |
| ADDITIVES                 |           | method       | limit/base   | current              | history1    | history2 |
| Boron                     | ppm       | ASTM D5185m  | 0            | 0                    | 0           |          |
| Barium                    | ppm       | ASTM D5185m  | 90           | 80                   | 71          |          |
| Molybdenum                | ppm       | ASTM D5185m  | 0            | 0                    | 0           |          |
| Manganese                 | ppm       | ASTM D5185m  |              | 0                    | 0           |          |
| Magnesium                 | ppm       | ASTM D5185m  | 100          | 82                   | 79          |          |
| Calcium                   | ppm       | ASTM D5185m  | 0            | 2                    | 4           |          |
| Phosphorus                | ppm       | ASTM D5185m  | 0            | 0                    | 4           |          |
| Zinc                      | ppm       | ASTM D5185m  | 0            | 2                    | <1          |          |
| CONTAMINANTS              |           | method       | limit/base   | current              | history1    | history2 |
| Silicon                   | ppm       | ASTM D5185m  | >25          | 3                    | 0           |          |
| Sodium                    | ppm       | ASTM D5185m  |              | 9                    | 7           |          |
| Potassium                 | ppm       | ASTM D5185m  | >20          | 2                    | 7           |          |
| Water                     | %         | ASTM D6304   | >0.05        | 0.027                | 0.011       |          |
| ppm Water                 | ppm       | ASTM D6304   | >500         | 278.0                | 111.9       |          |
| FLUID CLEANLIN            | IESS      | method       | limit/base   | current              | history1    | history2 |
| Particles >4µm            |           | ASTM D7647   |              | 6683                 | 650         |          |
| Particles >6µm            |           | ASTM D7647   |              | <u>^</u> 2817        | 195         |          |
| Particles >14μm           |           | ASTM D7647   | >80          | <b>429</b>           | 17          |          |
| Particles >21µm           |           | ASTM D7647   |              | <u> 140</u>          | 3           |          |
| Particles >38µm           |           | ASTM D7647   | >4           | 2                    | 0           |          |
| Particles >71µm           |           | ASTM D7647   |              | 0                    | 0           |          |
| Oil Cleanliness           |           | ISO 4406 (c) | >/17/13      | <u>20/19/16</u>      | 17/15/11    |          |
| FLUID DEGRADA             | TION      | method       | limit/base   | current              | history1    | history2 |
| Acid Number (AN)          | mg KOH/g  | ASTM D8045   | 1.0          | 0.37                 | 0.31        |          |



## **OIL ANALYSIS REPORT**

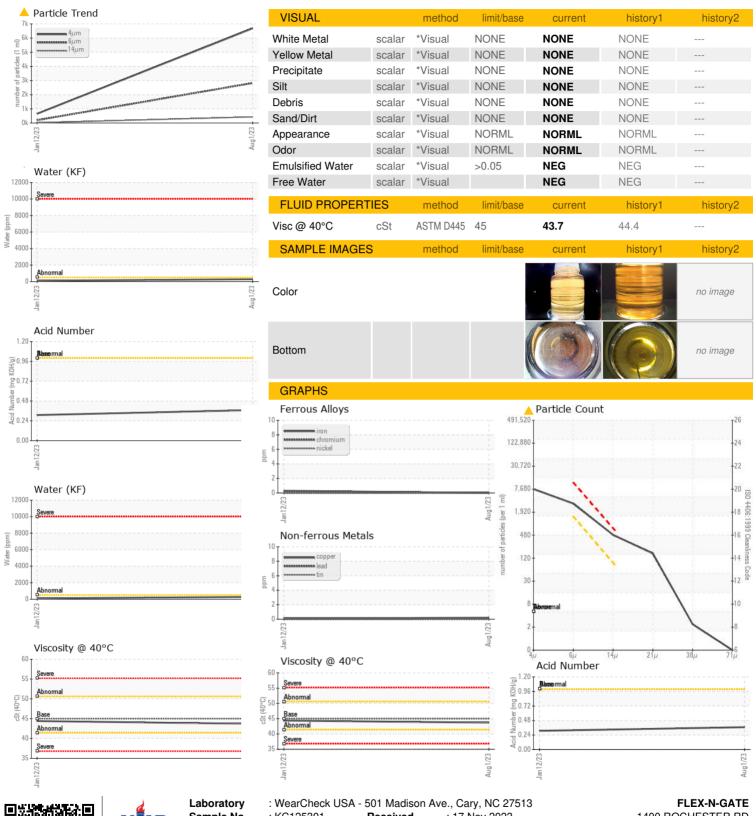





Certificate L2367

Sample No. Lab Number **Unique Number** Test Package

: KC125301 : 06010814

: IND 2

Received : 10749958

Diagnosed Diagnostician

: 17 Nov 2023 : 20 Nov 2023 : Don Baldridge 1400 ROCHESTER RD TROY, MI

US 48083 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: