




PROBLEM SUMMARY


Sample Rating Trend

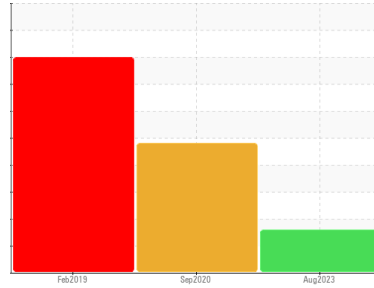

Machine Id
KAESER AS 30T 6522617 (S/N 1009)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

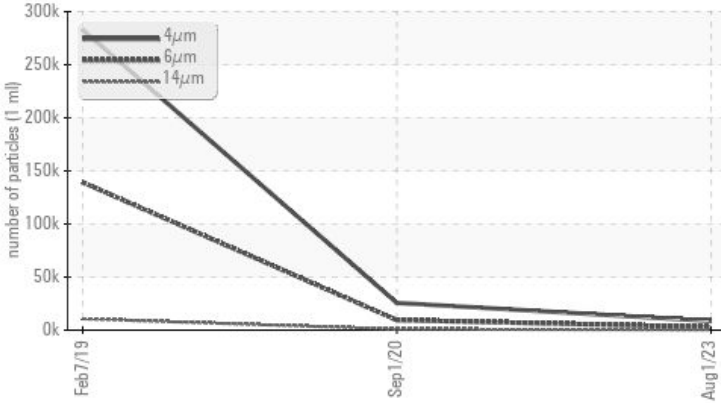

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	SEVERE	SEVERE
Particles >6µm	ASTM D7647	>1300	▲ 2930	▲ 9485	● 139233
Particles >14µm	ASTM D7647	>80	▲ 270	● 871	● 10653
Particles >21µm	ASTM D7647	>20	▲ 69	● 262	● 3391
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 20/19/15	● 20/17	● 24/21

Customer Id: JACWESMI
 Sample No.: KCPA002375
 Lab Number: 06010817
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS

01 Sep 2020 Diag: Angela Borella

ISO



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



07 Feb 2019 Diag: Angela Borella

ISO



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

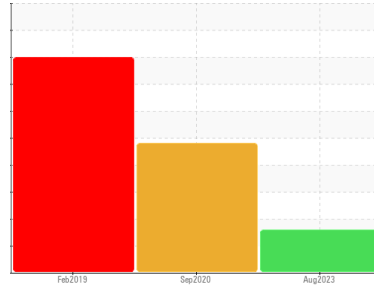

Machine Id
KAESER AS 30T 6522617 (S/N 1009)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KCPA002375	KCP30190	KCP11186
Sample Date	Client Info	01 Aug 2023	01 Sep 2020	07 Feb 2019
Machine Age	hrs	33131	11061	3108
Oil Age	hrs	0	4000	3108
Oil Changed	Client Info	N/A	Not Changd	Not Changd
Sample Status		ABNORMAL	SEVERE	SEVERE

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	0	<1	2
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m >3	0	0	0
Titanium	ppm	ASTM D5185m >3	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >10	0	0	<1
Lead	ppm	ASTM D5185m >10	0	0	<1
Copper	ppm	ASTM D5185m >50	9	17	7
Tin	ppm	ASTM D5185m >10	0	0	<1
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	0	<1	0
Barium	ppm	ASTM D5185m 90	0	0	23
Molybdenum	ppm	ASTM D5185m 0	0	0	0
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m 100	8	17	57
Calcium	ppm	ASTM D5185m 0	0	<1	3
Phosphorus	ppm	ASTM D5185m 0	0	3	2
Zinc	ppm	ASTM D5185m 0	58	49	14
Sulfur	ppm	ASTM D5185m 23500	18463	15746	20124

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	0	<1	2
Sodium	ppm	ASTM D5185m	3	6	26
Potassium	ppm	ASTM D5185m >20	0	<1	4
Water	%	ASTM D6304 >0.05	0.009	0.013	0.010
ppm Water	ppm	ASTM D6304 >500	93.9	132.1	100






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	8674	25684	283017
Particles >6µm	ASTM D7647 >1300	▲ 2930	▲ 9485	● 139233
Particles >14µm	ASTM D7647 >80	▲ 270	● 871	● 10653
Particles >21µm	ASTM D7647 >20	▲ 69	● 262	● 3391
Particles >38µm	ASTM D7647 >4	1	▲ 15	● 145
Particles >71µm	ASTM D7647 >3	0	0	4
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ 20/19/15	● 20/17	● 24/21

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.39	0.373	0.384

OIL ANALYSIS REPORT

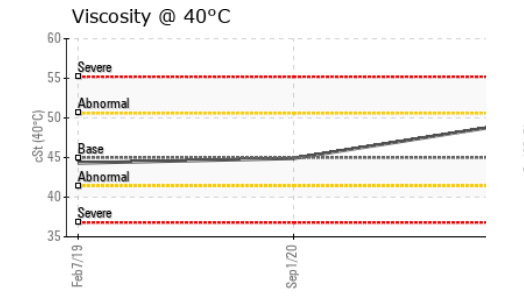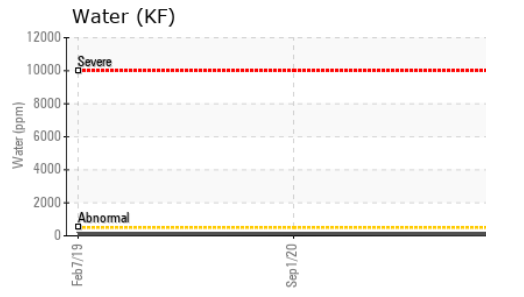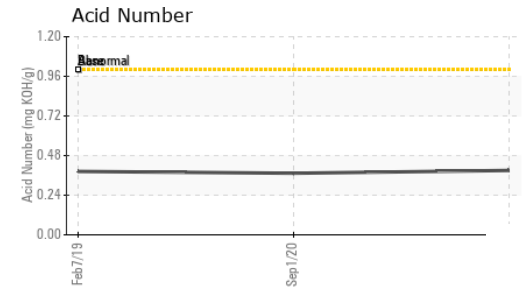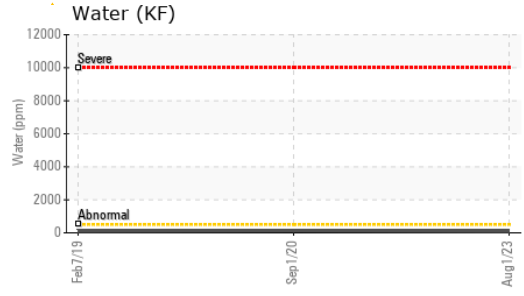
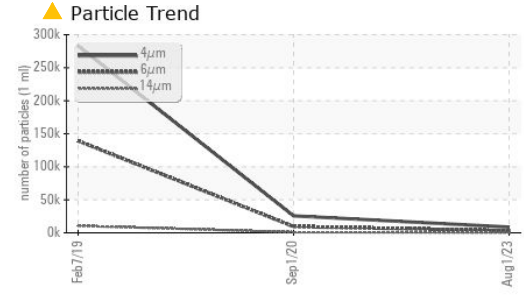


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	HEAVY
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 45	49.2	44.9	44.31

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

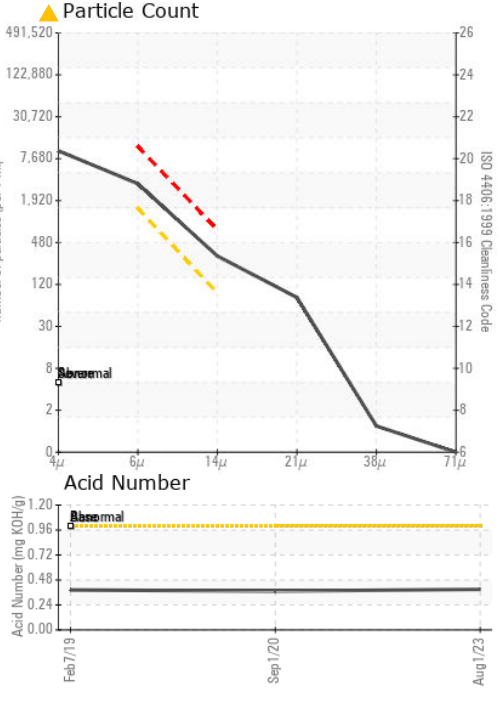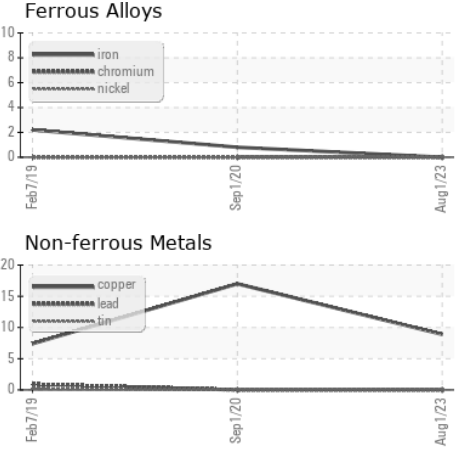

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA002375 **Received** : 17 Nov 2023
Lab Number : 06010817 **Diagnosed** : 20 Nov 2023
Unique Number : 10749961 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

JACK COOPER TRANSPORT
 426 S NEWBURGH RD
 WESTLAND, MI
 US 48186
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)