

No relevant graphs to display

RECOMMENDATION	PROBLEMATIC TEST RESULTS
RECOMMENDATION	PROBLEMATIC TEST RESULTS

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

PROBLEMATIC T	EST RE	SULTS				
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
Debris	scalar	*Visual	NONE		LIGHT	A MODER

Customer Id: TMDTRO Sample No.: KC125351 Lab Number: 06010821 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDE	D ACTIONS			
Action	Status	Date	Done By	Descri
Alert			?	We we particle

#### ription

vere unable to perform a particle count due to a high concentration of les present in this sample.

#### **HISTORICAL DIAGNOSIS**



02 Feb 2023 Diag: Jonathan Hester

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 07 Sep 2022 Diag: Angela Borella



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.





### **OIL ANALYSIS REPORT**

# Sample Rating Trend **VIS DEBRIS**

Machine Id 8005222 (S/N 1146) Component

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

#### Wear

All component wear rates are normal.

#### Contamination

Moderate concentration of visible dirt/debris present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC125351	KC106435	KC106259
Sample Date		Client Info		15 Aug 2023	02 Feb 2023	07 Sep 2022
Machine Age	hrs	Client Info		17238	12588	9330
Oil Age	hrs	Client Info		0	7600	4245
Oil Changed		Client Info		N/A	Changed	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	1	<1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	6	4	5
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	<1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	90	35	64	42
Calcium	ppm	ASTM D5185m	2	0	<1	<1
Phosphorus	ppm	ASTM D5185m		0	3	0
Zinc	ppm	ASTM D5185m		10	16	12
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	2
Sodium	ppm	ASTM D5185m		13	13	12
Potassium	ppm	ASTM D5185m	>20	1	2	5
Water	%	ASTM D6304	>0.05	0.020	0.018	0.015
ppm Water	ppm	ASTM D6304	>500	207.5	187.8	156.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647			14464	
Particles >6µm		ASTM D7647	>1300		▲ 5556	
Particles >14µm		ASTM D7647	>80		<b>6</b> 44	
Particles >21µm		ASTM D7647	>20		<b>1</b> 34	
Particles >38µm		ASTM D7647	>4		<u> </u>	
Particles >71µm		ASTM D7647	>3		0	
Oil Cleanliness		ISO 4406 (c)	>/17/13		<b>1</b> /20/17	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.35	0.35	0.33





(0-046 tso 44


Sep 7/22

40 - Abn


## **OIL ANALYSIS REPORT**

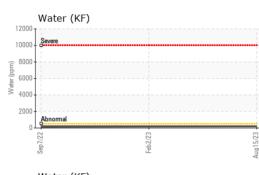

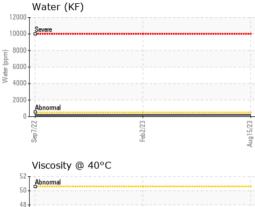


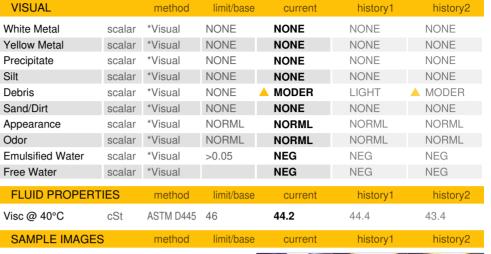

Color



Bottom

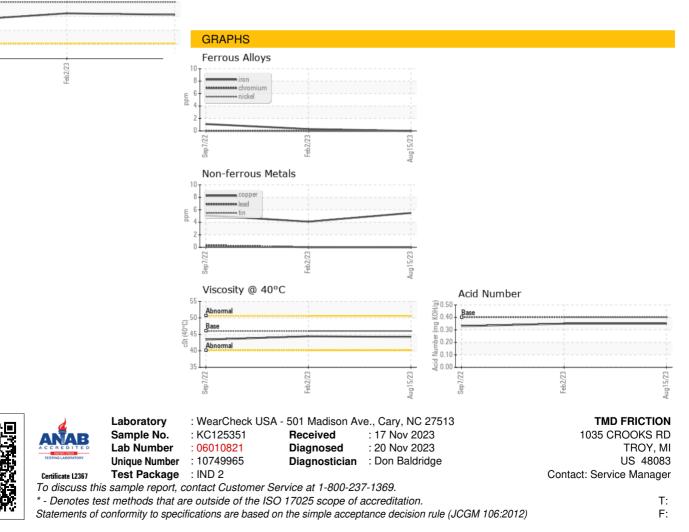

Contact/Location: Service Manager - TMDTRO