




KAESER 7433235

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

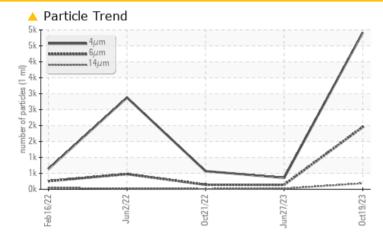

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status			ABNORMAL	NORMAL	NORMAL		
Particles >6µm	ASTM D7647	>1300	🔺 1951	139	143		
Particles >14µm	ASTM D7647	>80	🔺 187	22	11		
Particles >21µm	ASTM D7647	>20	<u> </u>	6	4		
Oil Cleanliness	ISO 4406 (c)	>/17/13	 19/18/15	16/14/12	16/14/11		


Customer Id: AREDEL Sample No.: KC125387 Lab Number: 06010829 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

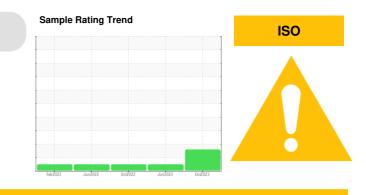

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

27 Jun 2023 Diag: Don Baldridge



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

21 Oct 2022 Diag: Angela Borella

02 Jun 2022 Diag: Jonathan Hester



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report



NORMAL



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend ISO

KAESER 7433235

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC125387	KC111417	KC107846
Sample Date		Client Info		19 Oct 2023	27 Jun 2023	21 Oct 2022
Machine Age	hrs	Client Info		11514	8819	4500
Oil Age	hrs	Client Info		0	0	365
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	3	9	6
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES	le le	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	5
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	1	0	34
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	5
Zinc	ppm	ASTM D5185m		8	0	6
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	. OE			
Sodium			>25	0	<1	<1
	ppm	ASTM D5185m		<1	0	2
Potassium	ppm ppm	ASTM D5185m ASTM D5185m	>20	<1 0	0 1	2 2
Water	ppm	ASTM D5185m ASTM D5185m ASTM D6304	>20 >0.05	<1 0 0.008	0 1 0.006	2 2 0.011
Water	ppm ppm	ASTM D5185m ASTM D5185m	>20 >0.05	<1 0	0 1	2 2
	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304	>20 >0.05	<1 0 0.008	0 1 0.006	2 2 0.011
Water ppm Water	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>20 >0.05 >500	<1 0 0.008 83.0	0 1 0.006 69.4	2 2 0.011 114.0
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>20 >0.05 >500	<1 0 0.008 83.0 current	0 1 0.006 69.4 history1	2 2 0.011 114.0 history2
Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>20 >0.05 >500 limit/base	<1 0 0.008 83.0 current 4917	0 1 0.006 69.4 history1 358	2 2 0.011 114.0 history2 568
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80	<1 0 0.008 83.0 current 4917 ▲ 1951	0 1 0.006 69.4 history1 358 139	2 2 0.011 114.0 history2 568 143
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80	<1 0 0.008 83.0 <u>current</u> 4917 ▲ 1951 ▲ 187	0 1 0.006 69.4 history1 358 139 22	2 2 0.011 114.0 history2 568 143 11
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20	<1 0 0.008 83.0 current 4917 4917 1951 187 52	0 1 0.006 69.4 history1 358 139 22 6	2 2 0.011 114.0 history2 568 143 11 4
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4	<1 0 0.008 83.0 current 4917 ▲ 1951 ▲ 1951 ▲ 187 ▲ 52 2	0 1 0.006 69.4 history1 358 139 22 6 0	2 2 0.011 114.0 history2 568 143 11 4 1
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm % ppm ESS	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	<1 0 0.008 83.0 current 4917 ▲ 1951 ▲ 1951 ▲ 187 ▲ 52 2 0	0 1 0.006 69.4 history1 358 139 22 6 0 0	2 2 0.011 114.0 history2 568 143 11 4 1 1 0



OIL ANALYSIS REPORT

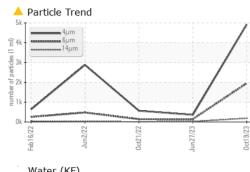


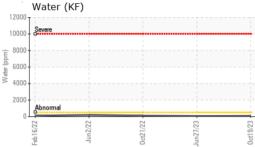

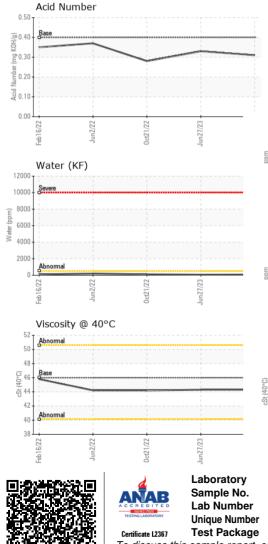

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.3	44.3	44.2
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						

Bottom

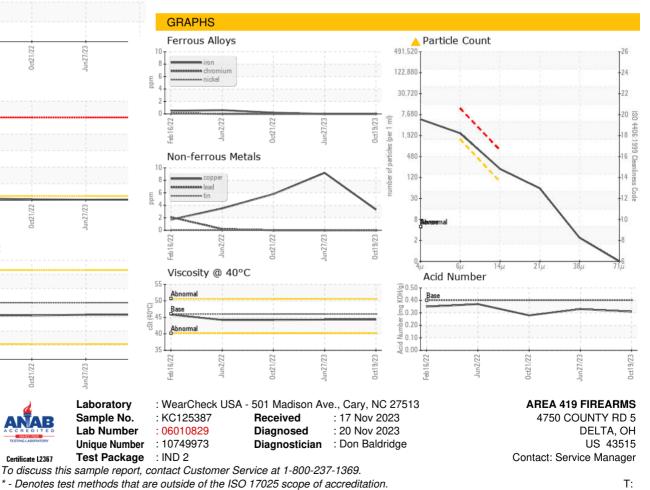

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - AREDEL

F: