


# PROBLEM SUMMARY

Sample Rating Trend



ISO

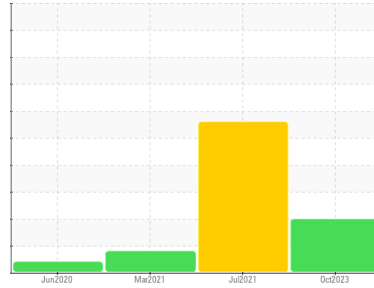


Machine Id  
**KAESER SK 15 4353808 (S/N 1216)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

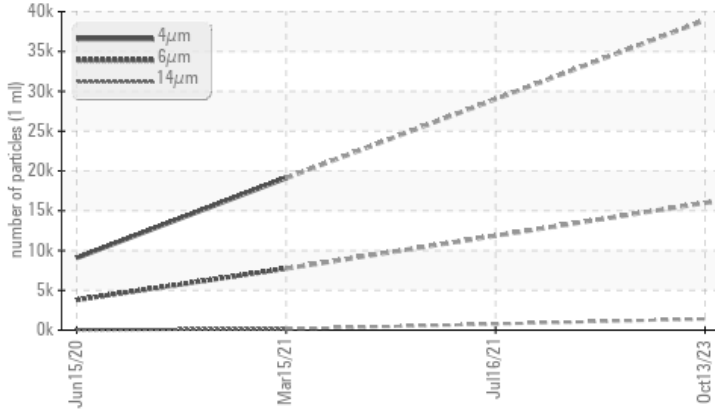

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	SEVERE	ABNORMAL
Particles >6µm	ASTM D7647	>1300	▲ 15983	---	▲ 7735
Particles >14µm	ASTM D7647	>80	▲ 1399	---	▲ 149
Particles >21µm	ASTM D7647	>20	▲ 285	---	15
Particles >38µm	ASTM D7647	>4	▲ 6	---	1
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 22/21/18	---	▲ 20/14

Customer Id: SHAROM  
Sample No.: KCPA006000  
Lab Number: 06010835  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS

### 16 Jul 2021 Diag: Doug Bogart

WATER



Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition. Please note that this is a corrected copy for laboratory data updates. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. There is a moderate amount of visible silt present in the sample. There is a high concentration of water present in the oil. The AN level is acceptable for this fluid. The oil is no longer serviceable due to the presence of contaminants.

view report



### 15 Mar 2021 Diag: Don Baldrige

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 15 Jun 2020 Diag: Doug Bogart

ISO




No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Machine Id  
**KAESER SK 15 4353808 (S/N 1216)**  
Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

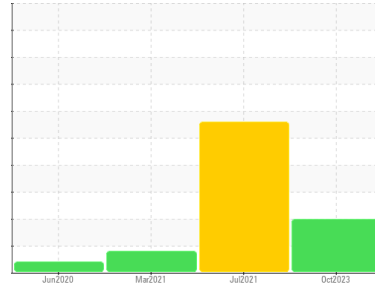

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KCPA006000</b>	KCP32025	KCP28116
Sample Date	Client Info	<b>13 Oct 2023</b>	16 Jul 2021	15 Mar 2021
Machine Age	hrs	<b>17605</b>	17295	15228
Oil Age	hrs	<b>0</b>	6000	5684
Oil Changed	Client Info	<b>N/A</b>	Changed	Changed
Sample Status		<b>ABNORMAL</b>	SEVERE	ABNORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	<b>0</b>	<1	<1
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>0</b>	0	0
Lead	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >50	<b>4</b>	2	6
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>0</b>	0	13
Barium	ppm	ASTM D5185m 90	<b>6</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 90	<b>67</b>	16	24
Calcium	ppm	ASTM D5185m 2	<b>0</b>	<1	0
Phosphorus	ppm	ASTM D5185m	<b>0</b>	▲ 77	4
Zinc	ppm	ASTM D5185m	<b>11</b>	▲ 33	14
Sulfur	ppm	ASTM D5185m	<b>18117</b>	▲ 7909	16167

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>&lt;1</b>	<1	<1
Sodium	ppm	ASTM D5185m	<b>13</b>	4	3
Potassium	ppm	ASTM D5185m >20	<b>1</b>	1	0
Water	%	ASTM D6304 >0.05	<b>0.022</b>	1.26	0.018
ppm Water	ppm	ASTM D6304 >500	<b>227.2</b>	12600	186.6

## FLUID CLEANLINESS


method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	<b>38923</b>	---	19100
Particles >6µm	ASTM D7647 >1300	▲ <b>15983</b>	---	▲ 7735
Particles >14µm	ASTM D7647 >80	▲ <b>1399</b>	---	▲ 149
Particles >21µm	ASTM D7647 >20	▲ <b>285</b>	---	15
Particles >38µm	ASTM D7647 >4	▲ <b>6</b>	---	1
Particles >71µm	ASTM D7647 >3	<b>0</b>	---	0
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ <b>22/21/18</b>	---	▲ 20/14

## FLUID DEGRADATION


method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.35</b>	0.285	0.359

# OIL ANALYSIS REPORT


## ▲ Particle Trend

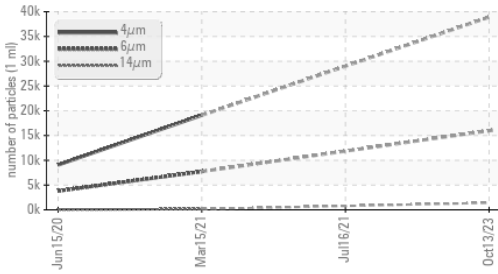


## Water (KF)

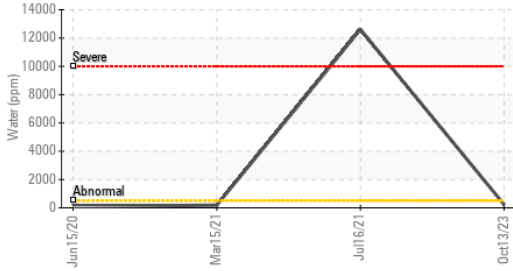


## Acid Number

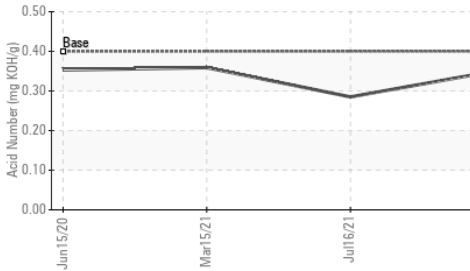

## Water (KF)

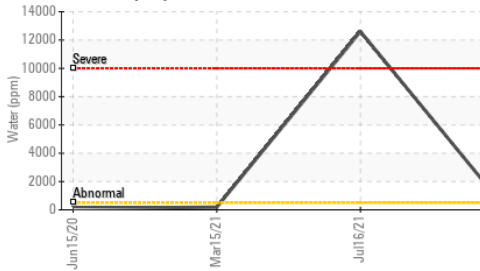


## Viscosity @ 40°C

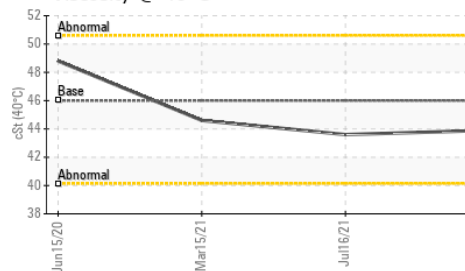

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	▲ MODER	NONE
Debris	scalar	*Visual	NONE	▲ MODER	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	43.9	43.6	44.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

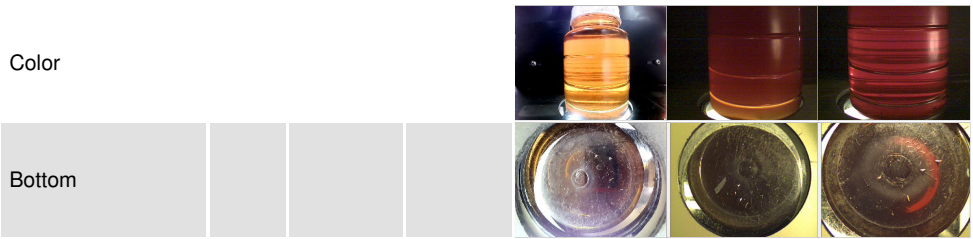


## GRAPHS


### Ferrous Alloys

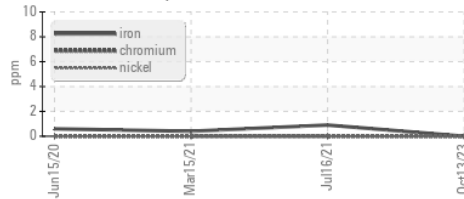


### Non-ferrous Metals

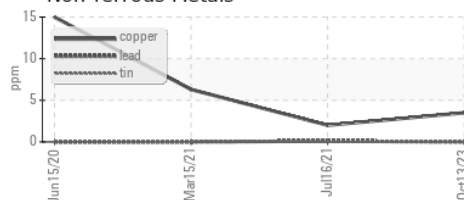


### Viscosity @ 40°C

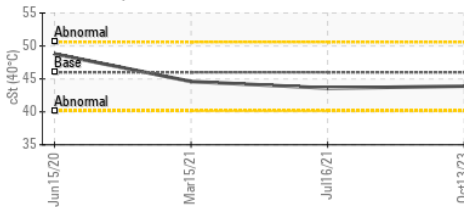

### ▲ Particle Count

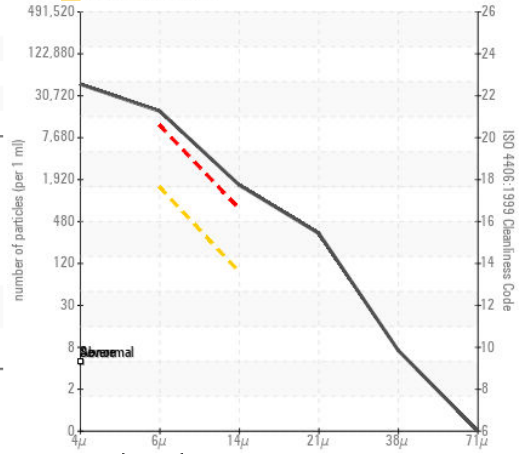

### Acid Number

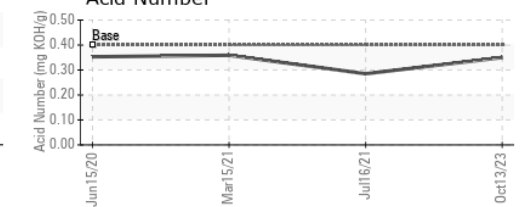

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA006000 **Received** : 17 Nov 2023  
**Lab Number** : 06010835 **Diagnosed** : 20 Nov 2023  
**Unique Number** : 10749979 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**SHARP TOOLING SOLUTIONS**  
 70745 POWELL RD  
 ROMEO, MI  
 US 48065  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: