




# OIL ANALYSIS REPORT

Sample Rating Trend

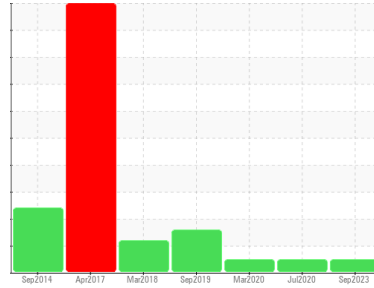

**NORMAL**



Machine Id  
**KAESER DSD 150 4857830 (S/N 1098)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>KCPA003100</b>  | KCP22852    | KCP26296    |
| Sample Date        | Client Info |             |            | <b>20 Sep 2023</b> | 06 Jul 2020 | 12 Mar 2020 |
| Machine Age        | hrs         | Client Info |            | <b>16067</b>       | 5727        | 5444        |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 300         | 900         |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | Not Changd  | Changed     |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| WEAR METALS |     | method      | limit/base | current    | history1 | history2 |
|-------------|-----|-------------|------------|------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >50        | <b>0</b>   | <1       | <1       |
| Chromium    | ppm | ASTM D5185m | >10        | <b>0</b>   | 0        | 0        |
| Nickel      | ppm | ASTM D5185m | >3         | <b>0</b>   | 0        | 0        |
| Titanium    | ppm | ASTM D5185m | >3         | <b>0</b>   | 0        | 0        |
| Silver      | ppm | ASTM D5185m | >2         | <b>0</b>   | 0        | <1       |
| Aluminum    | ppm | ASTM D5185m | >10        | <b>0</b>   | 1        | <1       |
| Lead        | ppm | ASTM D5185m | >10        | <b>0</b>   | 0        | <1       |
| Copper      | ppm | ASTM D5185m | >50        | <b>8</b>   | <1       | <1       |
| Tin         | ppm | ASTM D5185m | >10        | <b>0</b>   | 0        | 0        |
| Antimony    | ppm | ASTM D5185m |            | <b>---</b> | 0        | 0        |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>   | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>   | 0        | 0        |






| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>0</b>     | <1       | <1       |
| Barium     | ppm | ASTM D5185m | 90         | <b>0</b>     | 53       | 2        |
| Molybdenum | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b>     | <1       | <1       |
| Magnesium  | ppm | ASTM D5185m | 90         | <b>0</b>     | 71       | 46       |
| Calcium    | ppm | ASTM D5185m | 2          | <b>0</b>     | 3        | 1        |
| Phosphorus | ppm | ASTM D5185m |            | <b>0</b>     | 3        | 1        |
| Zinc       | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 7        |
| Sulfur     | ppm | ASTM D5185m |            | <b>15820</b> | 16888    | 16975    |

| CONTAMINANTS |     | method      | limit/base | current      | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>0</b>     | 2        | <1       |
| Sodium       | ppm | ASTM D5185m |            | <b>&lt;1</b> | 19       | 18       |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b>     | 5        | 4        |
| Water        | %   | ASTM D6304  | >0.05      | <b>0.008</b> | 0.030    | 0.010    |
| ppm Water    | ppm | ASTM D6304  | >500       | <b>81.0</b>  | 308.2    | 101.6    |

| FLUID CLEANLINESS |  | method       | limit/base | current         | history1 | history2 |
|-------------------|--|--------------|------------|-----------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   |            | <b>1229</b>     | 2244     | 4017     |
| Particles >6µm    |  | ASTM D7647   | >1300      | <b>373</b>      | 479      | 612      |
| Particles >14µm   |  | ASTM D7647   | >80        | <b>42</b>       | 48       | 29       |
| Particles >21µm   |  | ASTM D7647   | >20        | <b>18</b>       | 21       | 9        |
| Particles >38µm   |  | ASTM D7647   | >4         | <b>2</b>        | 11       | 0        |
| Particles >71µm   |  | ASTM D7647   | >3         | <b>0</b>        | 9        | 0        |
| Oil Cleanliness   |  | ISO 4406 (c) | >--/17/13  | <b>17/16/13</b> | 16/13    | 16/12    |

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 | 0.4        | <b>0.48</b> | 0.370    | 0.350    |


# OIL ANALYSIS REPORT

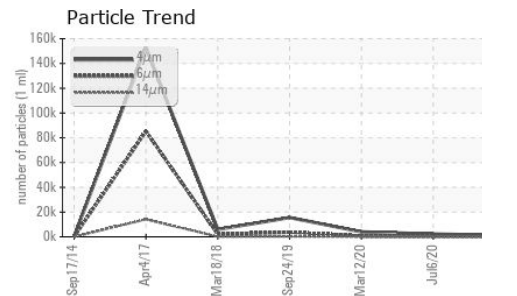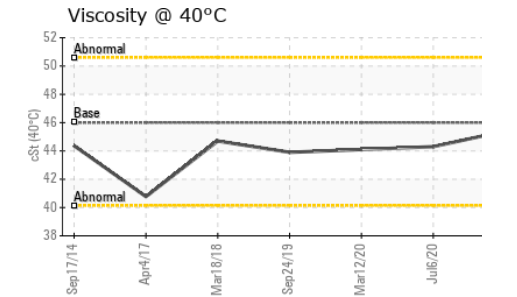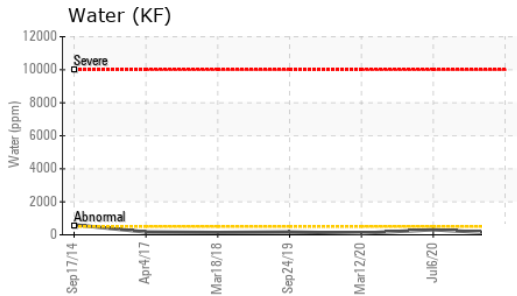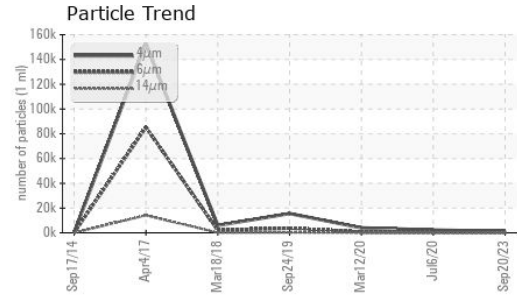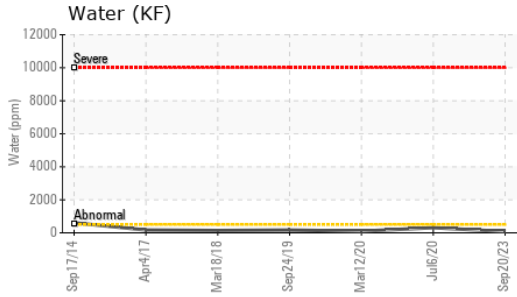






| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | LIGHT    | VLITE    |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.05   | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base   | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445 46 | 45.4    | 44.3     | 44.1     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

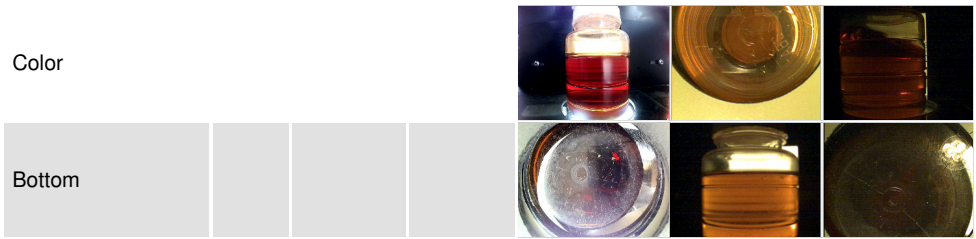

## GRAPHS

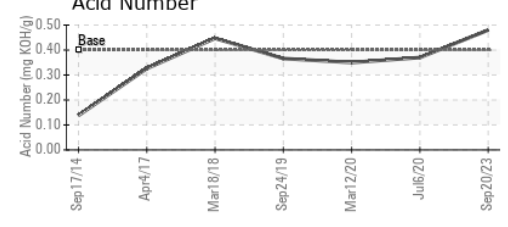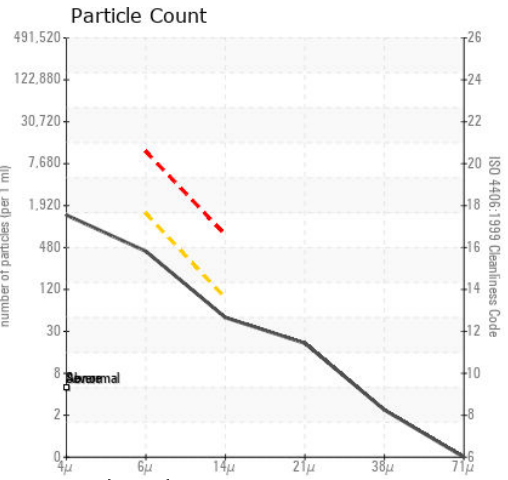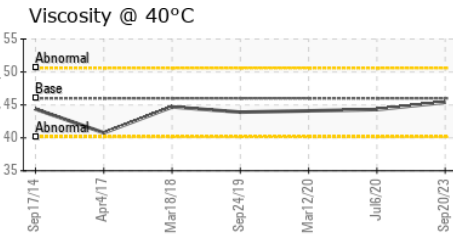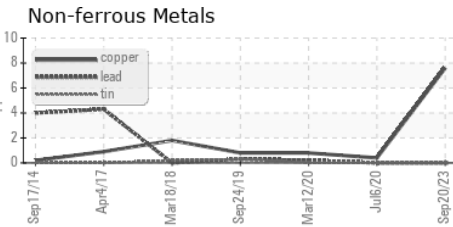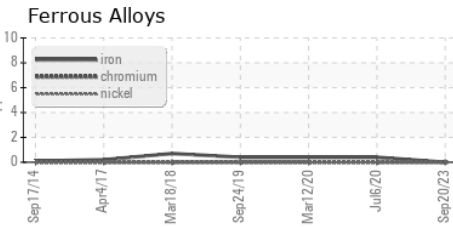

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA003100 **Received** : 17 Nov 2023  
**Lab Number** : 06010836 **Diagnosed** : 20 Nov 2023  
**Unique Number** : 10749980 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**BROSE**  
 23400 BELL RD  
 NEW BOSTON, MI  
 US 48164  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: