


## **PROBLEM SUMMARY**

# KAESER SM 10 5427604 (S/N 1765)

Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

#### COMPONENT CONDITION SUMMARY

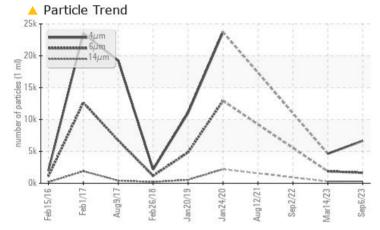

#### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### **PROBLEMATIC TEST RESULTS** Sample Status ABNORMAL ABNORMAL ABNORMAL Particles >6µm ASTM D7647 >1300 1641 **1863** · 🔺 Particles >14µm ASTM D7647 >80 294 **A** 281 ▲ Particles >21µm ASTM D7647 >20 96 67 **Oil Cleanliness** ISO 4406 (c) >--/17/13 **A 20/18/15** ▲ 19/18/15


Customer Id: BUTMAD Sample No.: KC126075 Lab Number: 06010838 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

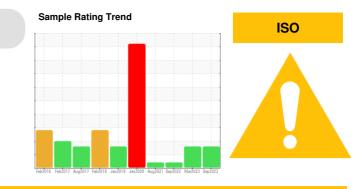

#### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

#### **HISTORICAL DIAGNOSIS**

#### 14 Mar 2023 Diag: Jonathan Hester



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

#### 02 Sep 2022 Diag: Angela Borella

12 Aug 2021 Diag: Angela Borella



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### VIS DEBRIS



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







## **OIL ANALYSIS REPORT**

## KAESER SM 10 5427604 (S/N 1765)

**Compressor** Fluid

KAESER SIGMA (OEM) FG-460 (--- GAL)

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

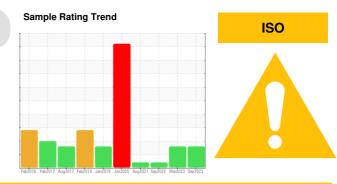

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC126075	KC106460	KC106251
Sample Date		Client Info		06 Sep 2023	14 Mar 2023	02 Sep 2022
Machine Age	hrs	Client Info		39320	2460	33099
Oil Age	hrs	Client Info		0	2460	4000
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	5	2	4
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	1	2	1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	4	4	2
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES	1. b.	method	limit/base	current	history1	history2
			IIIIIVDase			
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		0	2	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m	500	347	492	216
Zinc	ppm	ASTM D5185m		387	297	270
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		2	<1	0
Potassium	ppm	ASTM D5185m	>20	0	0	2
Water	%	ASTM D6304	>0.05	0.007	0.005	0.001
ppm Water	ppm	ASTM D6304	>500	78.6	50.6	6.7
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		6664	4634	
Particles >6µm		ASTM D7647	>1300	🔺 1641	<b>1</b> 863	
Particles >14µm		ASTM D7647	>80	<u> </u>	<b>A</b> 281	
Particles >21µm		ASTM D7647	>20	<u> </u>	<b>6</b> 7	
Particles >38µm		ASTM D7647	>4	4	4	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 20/18/15	▲ 19/18/15	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.5	0.93	1.42	0.54



Acid Number

1.60 Base

1.40

## **OIL ANALYSIS REPORT**

scalar

scalar

scalar

scalar

scalar

scalar

method

\*Visual

\*Visual

\*Visual

\*Visual

\*Visual

\*Visua

scalar \*Visual

limit/base

NONE

NONE

NONE

NONE

NONE

NONE

NORML

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

curren

current

VISUAL

White Metal

Yellow Metal


Precipitate


Silt


Debris


Sand/Dirt

Appearance

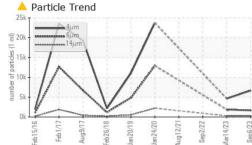

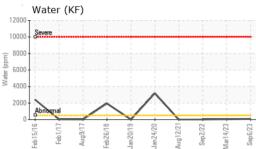

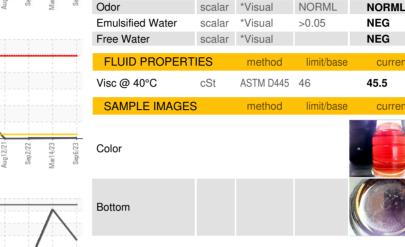



history1

NONE

NONE

NONE

NONE

LIGHT

NONE

NORML

NORML

NEG

NEG

48.8

history

history1

history2

NONE

NONE

NONE

NONE

A MODER

NONE

NORML

NORML


history2

historv2

NEG

NEG

46.0

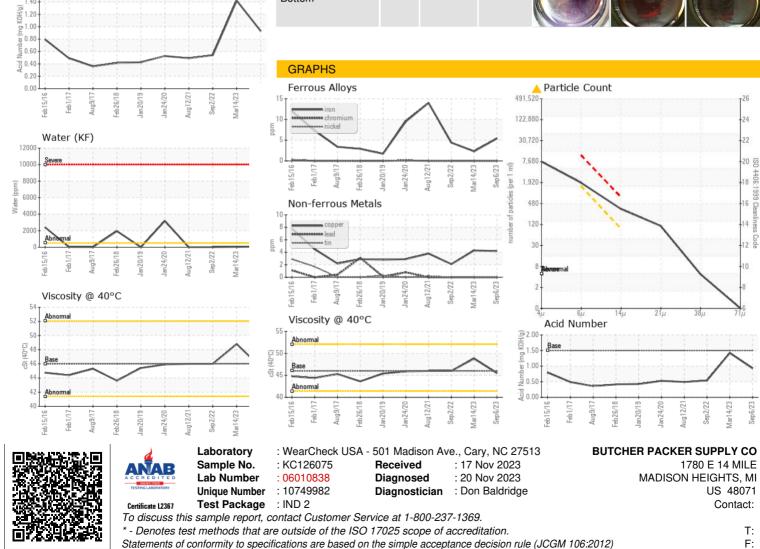

Report Id: BUTMAD [WUSCAR] 06010838 (Generated: 11/20/2023 18:20:31) Rev: 1

Contact/Location: ? ? - BUTMAD