


PROBLEM SUMMARY

Area **FAB** [10-1487839] Machine Id **CONE LINE TAKE AWAY BELT** Component

Gearbox Fluid NOT GIVEN (--- LTR)

COMPONENT CONDITION SUMMARY

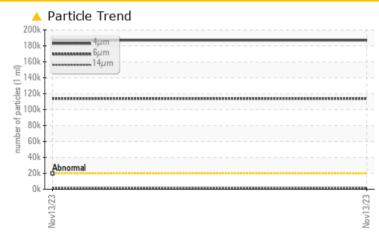

RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| THOBEEM THO T | 20111200210 | | | |
|-----------------|--------------|-----------|----------|------|
| Sample Status | | | ABNORMAL | |
| Particles >4µm | ASTM D7647 | >20000 | <u> </u> | |
| Particles >6µm | ASTM D7647 | >5000 | 🔺 113733 | |
| Particles >14µm | ASTM D7647 | >640 | 🔺 1446 | |
| Particles >21µm | ASTM D7647 | >160 | <u> </u> | |
| Oil Cleanliness | ISO 4406 (c) | >21/19/16 | <u> </u> | |


Customer Id: TYSWAV Sample No.: USP242316 Lab Number: 06010863 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

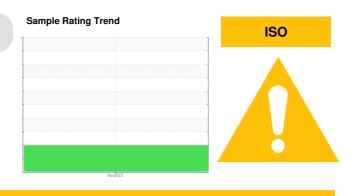

| RECOMMENDED ACTIONS | | | | | | |
|---------------------|--------|------|---------|---|--|--|
| Action | Status | Date | Done By | Description | | |
| Change Filter | | | ? | We recommend you service the filters on this component if applicable. | | |

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

FAB [10-1487839] Machine Id CONE LINE TAKE AWAY BELT

Gearbox Fluid NOT GIVEN (--- LTR)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

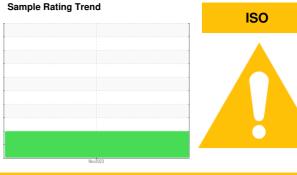

| SAMPLE INFORM | ATION | method | limit/base | current | history1 | history2 |
|------------------------|----------|--------------|------------|-----------------|----------|----------|
| Sample Number | | Client Info | | USP242316 | | |
| Sample Date | | Client Info | | 13 Nov 2023 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | ABNORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >200 | 106 | | |
| Chromium | ppm | ASTM D5185m | >15 | 0 | | |
| Nickel | ppm | ASTM D5185m | >15 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >25 | <1 | | |
| Lead | ppm | ASTM D5185m | >100 | 0 | | |
| Copper | ppm | ASTM D5185m | >200 | 1 | | |
| Tin | ppm | ASTM D5185m | >25 | 0 | | |
| Vanadium | ppm | ASTM D5185m | 200 | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | le le | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 2 | | |
| Molybdenum | | ASTM D5185m | | 0 | | |
| | ppm | ASTM D5185m | | ۰ <1 | | |
| Manganese Magnesium | ppm | ASTM D5185m | | 2 | | |
| - | ppm | | | 2 | | |
| Calcium | ppm | ASTM D5185m | | | | |
| Phosphorus | ppm | ASTM D5185m | | 354 | | |
| Zinc | ppm | ASTM D5185m | | 2 | | |
| Sulfur | ppm | ASTM D5185m | | 1184 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >50 | 4 | | |
| Sodium | ppm | ASTM D5185m | | <1 | | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | | |
| Water | % | ASTM D6304 | >0.2 | 0.016 | | |
| ppm Water | ppm | ASTM D6304 | >2000 | 168.4 | | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >20000 | <u> </u> | | |
| Particles >6µm | | ASTM D7647 | >5000 | 🔺 113733 | | |
| Particles >14µm | | ASTM D7647 | >640 | <u> </u> | | |
| Particles >21µm | | ASTM D7647 | >160 | <u> </u> | | |
| Particles >38µm | | ASTM D7647 | >40 | 3 | | |
| Particles >71µm | | ASTM D7647 | >10 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >21/19/16 | 25/24/18 | | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.41 | | |



OIL ANALYSIS REPORT

scalar

method

*Visual

limit/base

NONE

current


NONE


history1


history2


VISUAL

White Metal

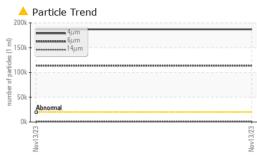

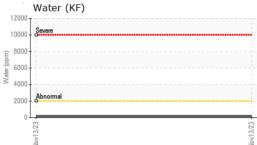

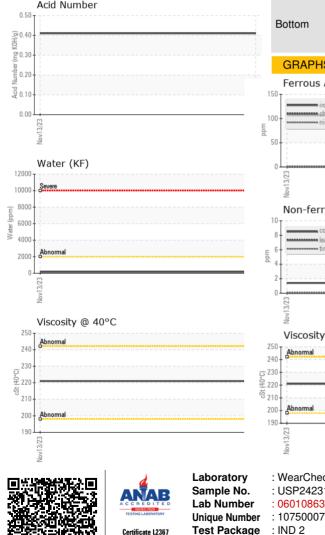

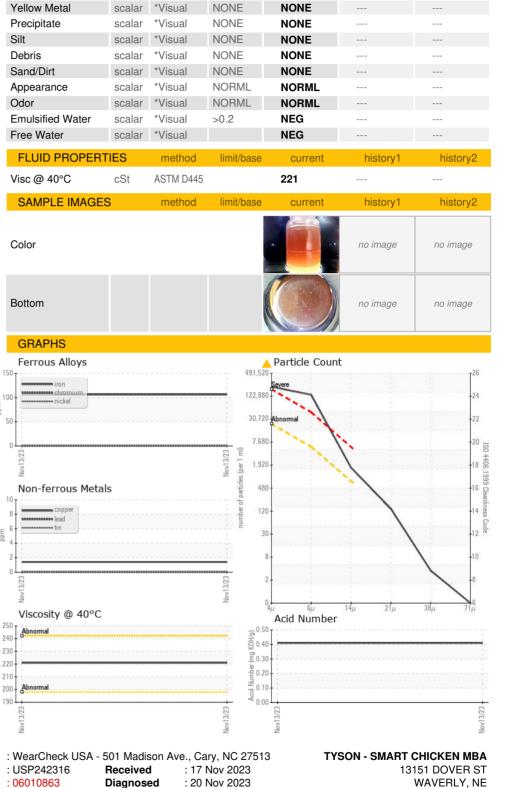

Diagnostician

: Doug Bogart

F:

US 68462

Contact: KURT CONRADT

kconradt@smartchicken.com