


# **PROBLEM SUMMARY**

#### Area ENGINE ROOM Machine Id 8 FRICK - FB05062 (S/N S0386MFMCWHAA3) Component

**Refrigeration Compressor** 

### ARTIC 300 ISO 68 (165 GAL)

### COMPONENT CONDITION SUMMARY

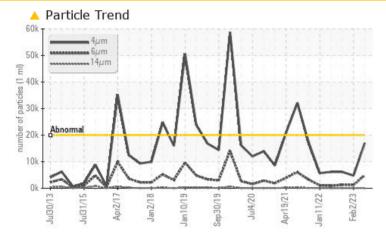

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ATTENTION	NORMAL	NORMAL				
Particles >6µm	ASTM D7647	>2500	<u> </u>	1226	1258				
Oil Cleanliness	ISO 4406 (c)	>21/18/15	<b>A</b> 21/19/14	19/17/12	20/17/13				


Customer Id: HORFREWC Sample No.: WC0850281 Lab Number: 06010934 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

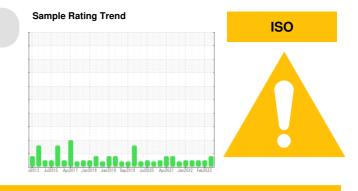

#### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

### HISTORICAL DIAGNOSIS

### 02 Feb 2023 Diag: Don Baldridge



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## 21 Jul 2022 Diag: Doug Bogart




Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view repor







Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





Report Id: HORFREWC [WUSCAR] 06010934 (Generated: 11/20/2023 20:54:06) Rev: 1



## **OIL ANALYSIS REPORT**

### Area ENGINE ROOM Machine Id 8 FRICK - FB05062 (S/N S0386MFMCWHAA3)

Refrigeration Compressor Fluid ARTIC 300 ISO 68 (165 GAL)

### DIAGNOSIS

### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear


All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

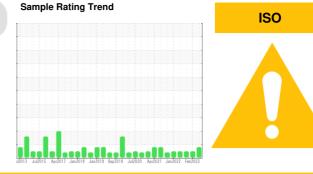


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0850281	WC0774948	WC0623184
Sample Date		Client Info		03 Nov 2023	02 Feb 2023	21 Jul 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	<1	<1
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	<1
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		1	<1	0
Phosphorus	ppm	ASTM D5185m		1	1	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		302	267	312
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	0	0	2
Water	%	ASTM D6304	>0.01	0.004	0.005	0.003
ppm Water	ppm	ASTM D6304	>100	40.4	55.6	36.1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	16973	4753	6148
Particles >6µm		ASTM D7647	>2500	<u> </u>	1226	1258
Particles >14µm		ASTM D7647	>320	102	34	48
Particles >21µm		ASTM D7647	>80	9	3	7
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>21/18/15	<b>A</b> 21/19/14	19/17/12	20/17/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974		0.013	0.014	0.014





Acid Number

0.03


# **OIL ANALYSIS REPORT**

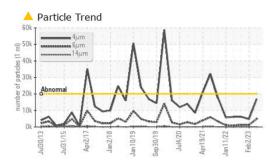

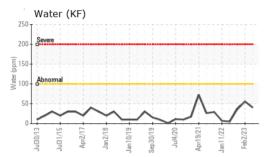

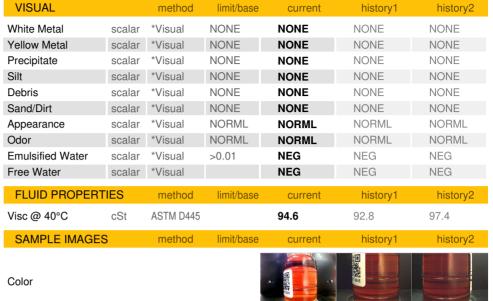

Bottom

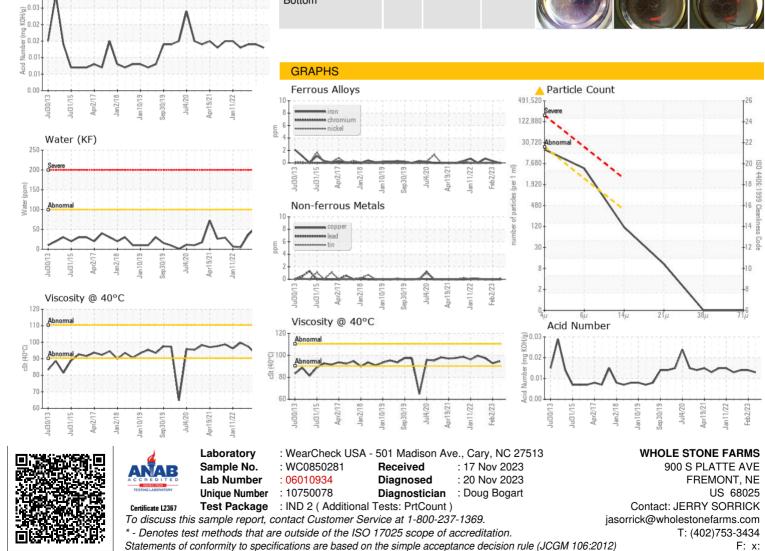

Report Id: HORFREWC [WUSCAR] 06010934 (Generated: 11/20/2023 20:54:07) Rev: 1