

#### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL	NORMAL	NORMAL				
Particles >4µm	ASTM D7647	>20000	<u> </u>	3406	10821				
Particles >6µm	ASTM D7647	>2500	<u> </u>	796	1527				
Oil Cleanliness	ISO 4406 (c)	>21/18/15	<u> </u>	19/17/12	21/18/13				

Customer Id: HORFREWC Sample No.: WC0850282 Lab Number: 06010936 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com ISO

#### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

#### HISTORICAL DIAGNOSIS

#### 11 Aug 2023 Diag: Doug Bogart



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 21 Jul 2022 Diag: Doug Bogart



 $\checkmark$ 

Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



09 Apr 2022 Diag: Doug Bogart

#### NORMAL



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

#### Area ENGINE ROOM Machine Id 6 VILTER - FB09028 (S/N 6179) Component

Refrigeration Compressor

MOBIL GARGOYLE ARTIC 300 (--- GAL)

# DIAGNOSIS

## A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

# Wear


All component wear rates are normal.

# Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

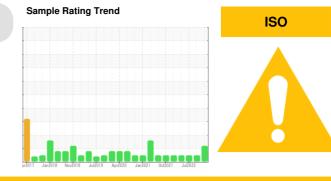

SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0850282	WC0826209	WC0623185
Sample Date		Client Info		03 Nov 2023	11 Aug 2023	21 Jul 2022
Machine Age	hrs	Client Info		0	67372	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	3	3	<1
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		<1	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	<1
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		1	<1	6
Zinc	ppm	ASTM D5185m		0	<1	0
Sulfur	ppm	ASTM D5185m		74	101	40
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	0	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	0	1	<1
Water	%	ASTM D6304	>0.01	0.003	0.002	0.002
ppm Water	ppm	ASTM D6304	>100	30.1	21.3	18.7
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	<b>52626</b>	3406	10821
Particles >6µm		ASTM D7647	>2500	<u> </u>	796	1527
Particles >14µm		ASTM D7647	>320	168	34	58
Particles >21µm		ASTM D7647	>80	11	8	8
Particles >38µm		ASTM D7647	>20	0	0	1
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>21/18/15	<b>A</b> 23/20/15	19/17/12	21/18/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.01	0.013	0.016	0.014




Acid Number


0.02


# **OIL ANALYSIS REPORT**

method

VISUAL

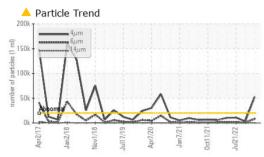

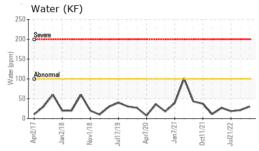

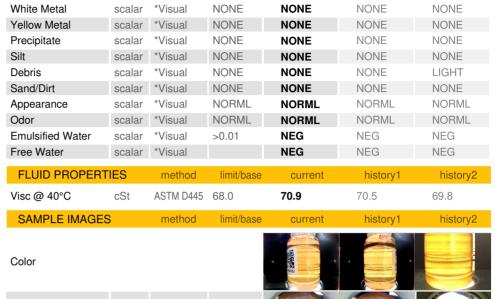

limit/base

current

history1

history2

Bottom

