

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

BC-14 (S/N SO113NFMFTHAA3)

Refrigeration Compressor

CAMCO 717 HT (150 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







v2011 Dec2013 Mar2015 Apr2016 Aug2017 Nov2018 Feb2020 Mar2021


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0864152	WC0802854	WC0627066
Sample Date		Client Info		12 Nov 2023	23 May 2023	24 Sep 2021
Machine Age	hrs	Client Info		148537	146139	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	5	8	4
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	<1	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		1	1	1
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		37	10	48
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.01	0.005	0.003	0.001
ppm Water	ppm	ASTM D6304	>100	53.3	25.3	0.00
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.007	0.048	0.028	0.015



OIL ANALYSIS REPORT

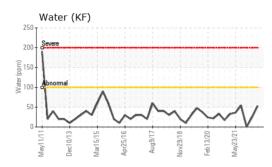


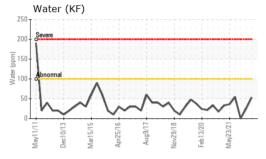


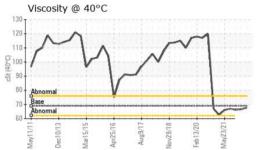


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	69	67.7	66.6	66.2
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						

Bottom



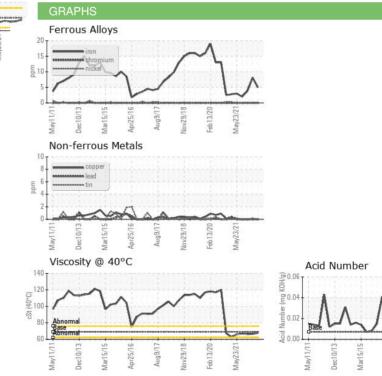



LAMB WESTON/RDO Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 Sample No. : WC0864152 Received : 17 Nov 2023 PO BOX 552 Lab Number : 06010965 Diagnosed : 21 Nov 2023 PARK RAPIDS, MN : 10750109 Unique Number Diagnostician : Don Baldridge US 56470 Test Package : IND 2 Contact: MICHAEL GRUIS Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. michael.gruis@lambweston.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (218)732-2188 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (218)732-2175

Contact/Location: MICHAEL GRUIS - LAMPAR