




OIL ANALYSIS REPORT

Sample Rating Trend

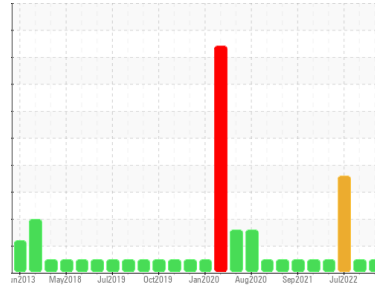

NORMAL



Area
[BECELC]
 Machine Id
STEIGER PTA 310 PTA310 (S/N 11020392)
 Component
Diesel Engine
 Fluid
ALPHA LUBRICANTS PREMIUM 15W40 (9 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Alpha Lubricants Premium 15w40. Machine and Component age are incorrect. Machine and Component Age should be 12,824hrs)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0472450	WC0472451	WC0472468
Sample Date	Client Info		16 Oct 2023	10 Apr 2023	30 Jul 2022
Machine Age	hrs Client Info		208767	12321	11795
Oil Age	hrs Client Info		503	526	250
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	0.6
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>90	40	68	▲ 198
Chromium	ppm ASTM D5185m	>20	1	2	6
Nickel	ppm ASTM D5185m	>2	<1	<1	2
Titanium	ppm ASTM D5185m	>2	<1	<1	<1
Silver	ppm ASTM D5185m	>2	1	0	0
Aluminum	ppm ASTM D5185m	>20	4	3	8
Lead	ppm ASTM D5185m	>40	8	36	▲ 66
Copper	ppm ASTM D5185m	>330	3	4	▲ 32
Tin	ppm ASTM D5185m	>15	0	<1	▲ 9
Vanadium	ppm ASTM D5185m		0	0	<1
Cadmium	ppm ASTM D5185m		<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		<1	1	9
Barium	ppm ASTM D5185m		1	0	0
Molybdenum	ppm ASTM D5185m		155	35	148
Manganese	ppm ASTM D5185m		<1	1	2
Magnesium	ppm ASTM D5185m		16	20	96
Calcium	ppm ASTM D5185m		3897	4239	4760
Phosphorus	ppm ASTM D5185m		1034	916	1165
Zinc	ppm ASTM D5185m		1095	1137	1376
Sulfur	ppm ASTM D5185m		4273	4443	5166

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25	6	8	22
Sodium	ppm ASTM D5185m		3	4	7
Potassium	ppm ASTM D5185m	>20	4	1	3

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>6	1.1	1.5	0.5
Nitration	Abs/cm *ASTM D7624	>20	10.6	13.1	18.0
Sulfation	Abs/.1mm *ASTM D7415	>30	38.1	39.9	45.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	39.3	42.8	50.6
Acid Number (AN)	mg KOH/g ASTM D8045		0.44	1.13	1.59
Base Number (BN)	mg KOH/g ASTM D2896		10.79	12.13	11.92











OIL ANALYSIS REPORT

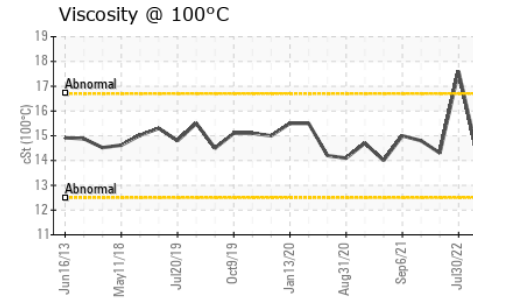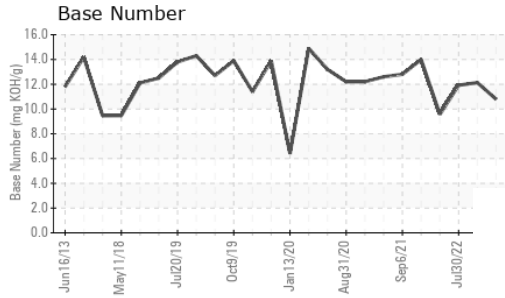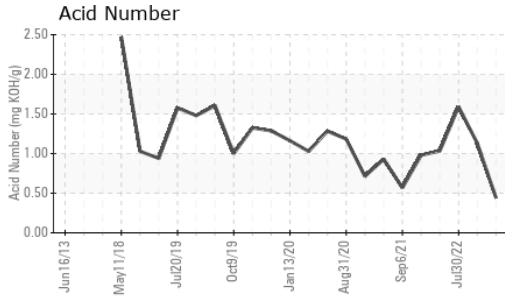

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.4	14.3	▲ 17.6

GRAPHS

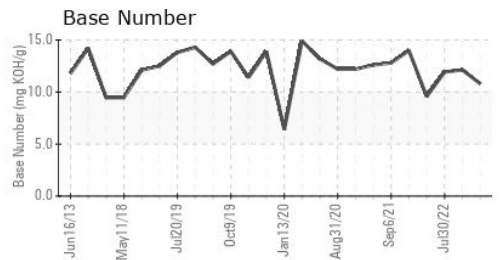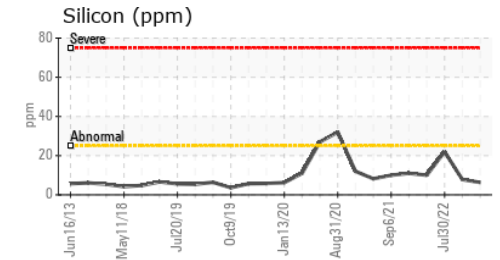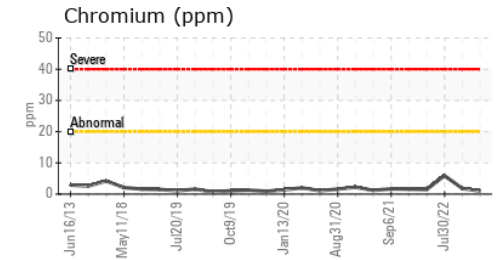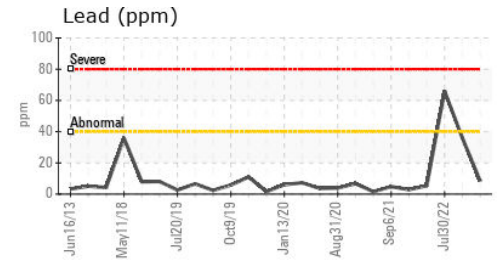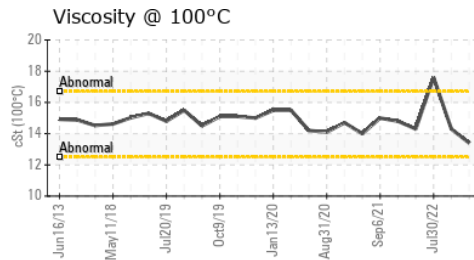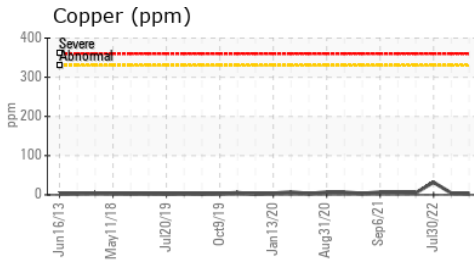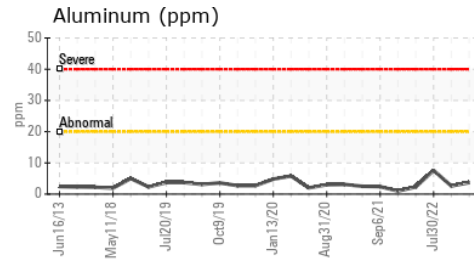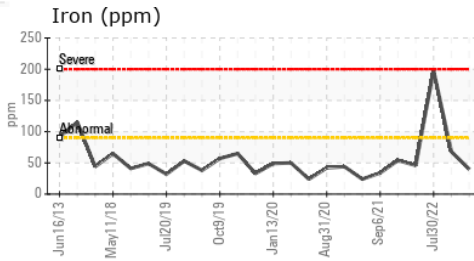

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0472450 Received : 17 Nov 2023
 Lab Number : 06011084 Diagnosed : 20 Nov 2023
 Unique Number : 10750228 Diagnostician : Sean Felton
 Test Package : MOB 2

BECKER LAND GRADING
 9673 N STATE HWY 71
 EL CAMPO, TX
 US 77437

Contact: DALYN BECKER
 dalyn@beckerlandgrading.com
 T: (979)253-4531

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: