



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**JOHN DEERE 843L 1DW843LBPKF699738**

Component  
**Transmission**

Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WE0005729</b>	---	---
Sample Date	Client Info			<b>15 Nov 2023</b>	---	---
Machine Age	hrs	Client Info		<b>5825</b>	---	---
Oil Age	hrs	Client Info		<b>100</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.075	<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>100	<b>15</b>	---	---
Iron	ppm	ASTM D5185m	>61	<b>8</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m		<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Lead	ppm	ASTM D5185m	>9	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6	<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>2</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m	145	<b>104</b>	---	---
Calcium	ppm	ASTM D5185m	3570	<b>3253</b>	---	---
Phosphorus	ppm	ASTM D5185m	1290	<b>1002</b>	---	---
Zinc	ppm	ASTM D5185m	1640	<b>1232</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3868</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>21	<b>6</b>	---	---
Sodium	ppm	ASTM D5185m	>30	<b>0</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---







# OIL ANALYSIS REPORT

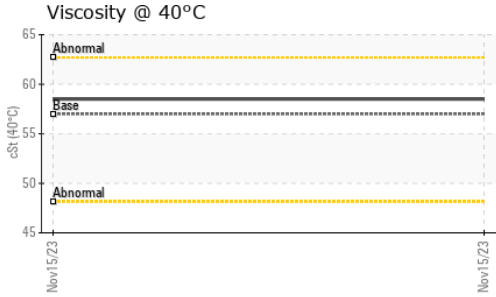

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	57.0	<b>58.5</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

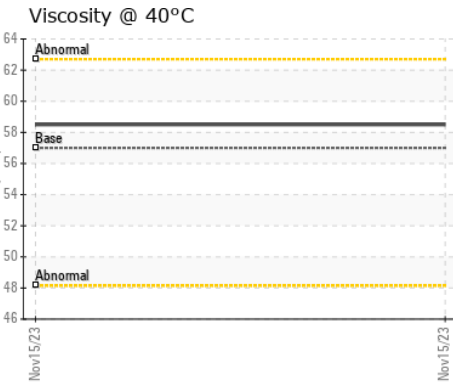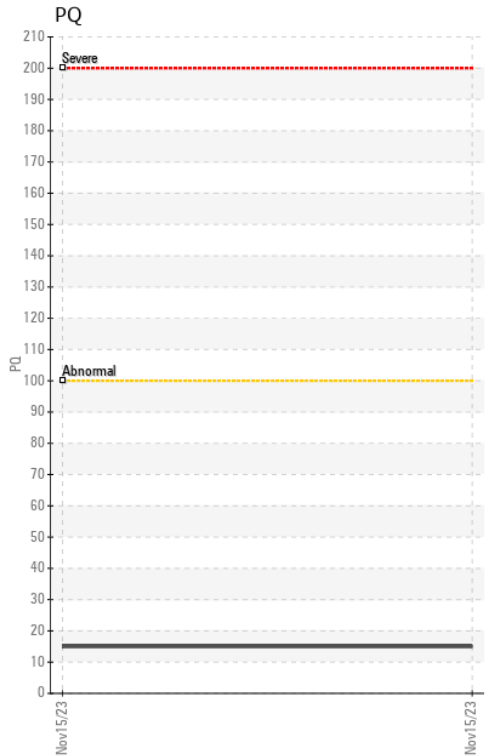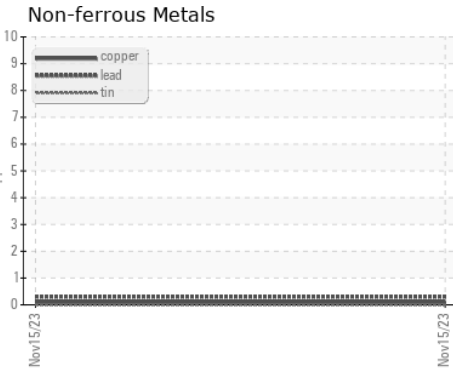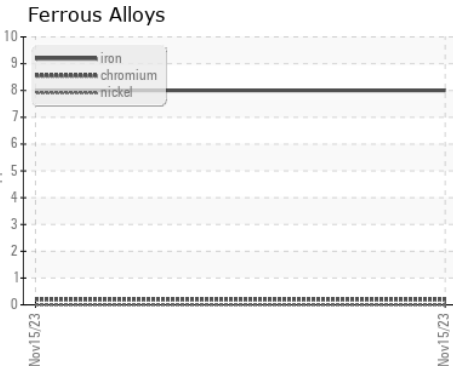

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WE0005729 **Received** : 17 Nov 2023  
**Lab Number** : 06011107 **Diagnosed** : 20 Nov 2023  
**Unique Number** : 10750251 **Diagnostician** : Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT**  
 P.O. BOX 412  
 NORTHPORT, AL  
 US 35476  
 Contact: CRAIG ANDOE  
 serve01@warriortractor.com  
 T: (205)339-0300  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)