



PROBLEM SUMMARY

Sample Rating Trend


VISCOSITY



Machine Id
PETERBILT 854576


Component
Diesel Engine

Fluid
SHELL ROTELLA T4 15W40 (--- QTS)

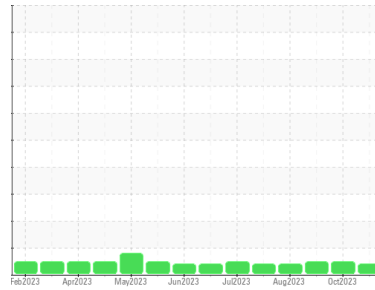

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

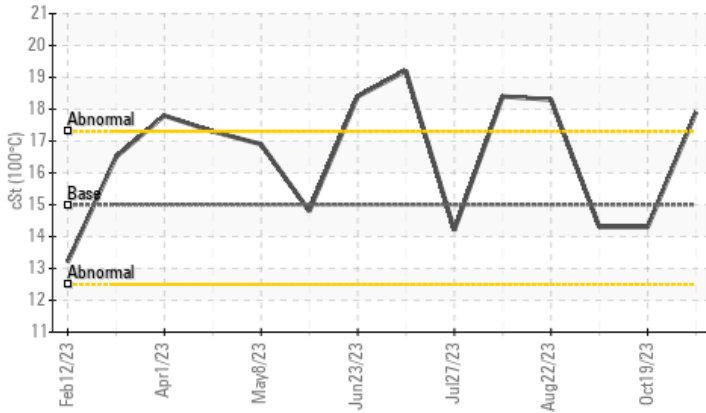

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	NORMAL	NORMAL
Visc @ 100°C	cSt	ASTM D445	15	▲ 17.9	14.3	14.3

Customer Id: BIGNAT
Sample No.: WC0838305
Lab Number: 06011320
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Sean Felton +1 919-379-4092
sfelton@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

19 Oct 2023 Diag: Sean Felton

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



10 Sep 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



22 Aug 2023 Diag: Doug Bogart

VISCOSITY



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

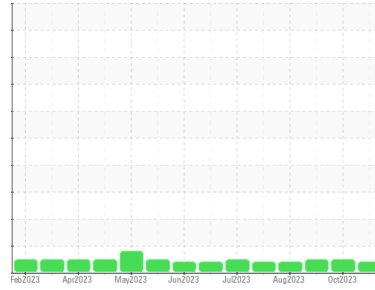

VISCOSITY



Machine Id
PETERBILT 854576
 Component
Diesel Engine
 Fluid
SHELL ROTELLA T4 15W40 (--- QTS)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0838305	WC0838309	WC0657270
Sample Date	Client Info		05 Nov 2023	19 Oct 2023	10 Sep 2023
Machine Age	mls	Client Info	180024	167452	134881
Oil Age	mls	Client Info	12572	10168	10187
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ATTENTION	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	15	15	19
Chromium	ppm	ASTM D5185m >4	<1	<1	1
Nickel	ppm	ASTM D5185m >2	<1	<1	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	1	1	0
Lead	ppm	ASTM D5185m >45	<1	1	2
Copper	ppm	ASTM D5185m >85	2	2	3
Tin	ppm	ASTM D5185m >4	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	<1	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	97	131	126
Barium	ppm	ASTM D5185m	<1	<1	0
Molybdenum	ppm	ASTM D5185m	1	1	1
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m	12	15	13
Calcium	ppm	ASTM D5185m	1712	2013	2130
Phosphorus	ppm	ASTM D5185m	753	897	910
Zinc	ppm	ASTM D5185m	940	1099	1150
Sulfur	ppm	ASTM D5185m	3118	3395	3982

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	2	3	5
Sodium	ppm	ASTM D5185m	0	<1	2
Potassium	ppm	ASTM D5185m >20	7	8	6

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.5	0.5	0.5
Nitration	Abs/cm	*ASTM D7624 >20	6.9	7.1	6.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.3	20.6	19.7

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.1	15.7	15.1
Base Number (BN)	mg KOH/g	ASTM D2896 10.1	6.6	7.4	7.1







OIL ANALYSIS REPORT

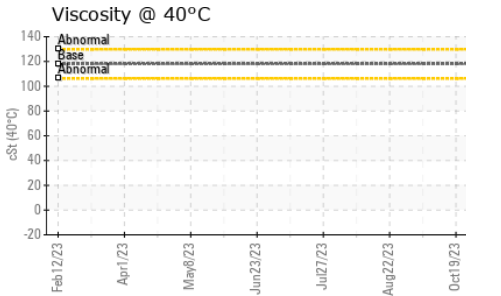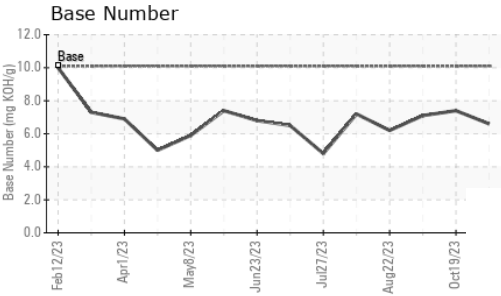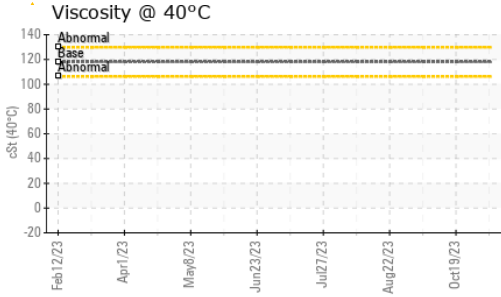

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 15	▲ 17.9	14.3	14.3

GRAPHS

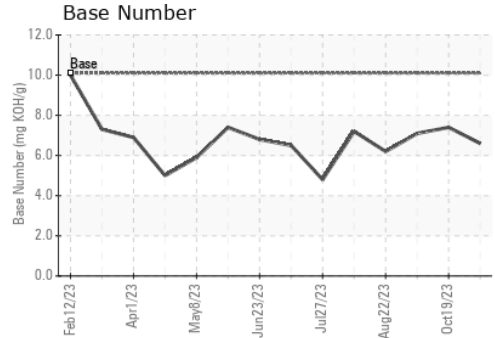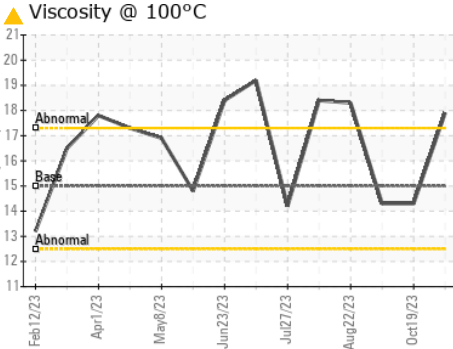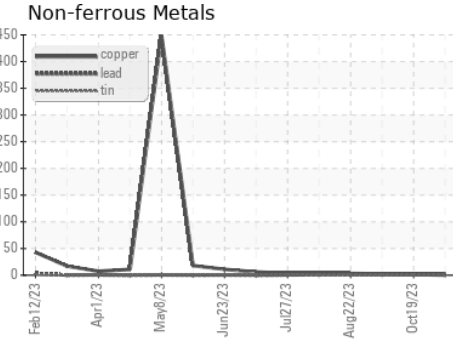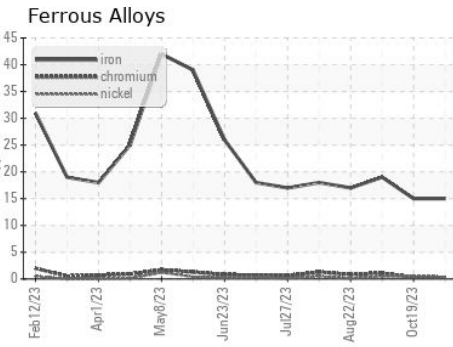

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0838305 **Received** : 17 Nov 2023
Lab Number : 06011320 **Diagnosed** : 21 Nov 2023
Unique Number : 10750464 **Diagnostician** : Sean Felton
Test Package : FLEET (Additional Tests: KV40)

BIG EARL TRUCKING
 12 WOODHILL DR
 NATCHEZ, MS
 US 39120
 Contact: Christopher Longmire
 lroyn83@gmail.com
 T: (601)431-2670
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)