


## **OIL ANALYSIS REPORT**

### Sample Rating Trend



NORMAL



# GERALD STATION

Component

Hydraulic System

AW HYDRAULIC OIL ISO 32 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                  |          | Jul2018      | Jun2021 Nov2021 | May2022 Nov2022 May2023 | Nov2023     |             |
|------------------|----------|--------------|-----------------|-------------------------|-------------|-------------|
| SAMPLE INFORM    | MATION   | method       | limit/base      | current                 | history1    | history2    |
| Sample Number    |          | Client Info  |                 | WC0591951               | WC0591952   | WC0591950   |
| Sample Date      |          | Client Info  |                 | 07 Nov 2023             | 02 May 2023 | 04 Nov 2022 |
| Machine Age      | hrs      | Client Info  |                 | 0                       | 0           | 0           |
| Oil Age          | hrs      | Client Info  |                 | 0                       | 0           | 0           |
| Oil Changed      |          | Client Info  |                 | N/A                     | N/A         | N/A         |
| Sample Status    |          |              |                 | NORMAL                  | NORMAL      | NORMAL      |
| CONTAMINATIO     | N        | method       | limit/base      | current                 | history1    | history2    |
| Water            |          | WC Method    | >0.05           | NEG                     | NEG         | NEG         |
| WEAR METALS      |          | method       | limit/base      | current                 | history1    | history2    |
| Iron             | ppm      | ASTM D5185m  | >30             | 3                       | 4           | 2           |
| Chromium         | ppm      | ASTM D5185m  | >2              | 0                       | 0           | 0           |
| Nickel           | ppm      | ASTM D5185m  | >2              | 0                       | 0           | 0           |
| Titanium         | ppm      | ASTM D5185m  |                 | 0                       | 0           | 0           |
| Silver           | ppm      | ASTM D5185m  |                 | 0                       | 0           | <1          |
| Aluminum         | ppm      | ASTM D5185m  | >2              | 0                       | 0           | 0           |
| Lead             | ppm      | ASTM D5185m  | >10             | 0                       | 1           | <1          |
| Copper           | ppm      | ASTM D5185m  | >25             | 3                       | 4           | 4           |
| Tin              | ppm      | ASTM D5185m  | >20             | 0                       | 0           | 0           |
| Vanadium         | ppm      | ASTM D5185m  |                 | 0                       | 0           | 0           |
| Cadmium          | ppm      | ASTM D5185m  |                 | 0                       | <1          | <1          |
| ADDITIVES        |          | method       | limit/base      | current                 | history1    | history2    |
| Boron            | ppm      | ASTM D5185m  | 5               | 0                       | 0           | 2           |
| Barium           | ppm      | ASTM D5185m  | 5               | 0                       | 0           | 0           |
| Molybdenum       | ppm      | ASTM D5185m  | 5               | <1                      | <1          | <1          |
| Manganese        | ppm      | ASTM D5185m  |                 | 0                       | <1          | 0           |
| Magnesium        | ppm      | ASTM D5185m  | 25              | 0                       | 10          | 8           |
| Calcium          | ppm      | ASTM D5185m  | 200             | 105                     | 142         | 125         |
| Phosphorus       | ppm      | ASTM D5185m  | 300             | 280                     | 348         | 293         |
| Zinc             | ppm      | ASTM D5185m  | 370             | 343                     | 416         | 352         |
| Sulfur           | ppm      | ASTM D5185m  | 2500            | 1166                    | 1623        | 1556        |
| CONTAMINANTS     | ;        | method       | limit/base      | current                 | history1    | history2    |
| Silicon          | ppm      | ASTM D5185m  | >25             | 9                       | 12          | 9           |
| Sodium           | ppm      | ASTM D5185m  |                 | 2                       | 0           | 0           |
| Potassium        | ppm      | ASTM D5185m  | >20             | 0                       | 2           | 1           |
| FLUID CLEANLIN   | IESS     | method       | limit/base      | current                 | history1    | history2    |
| Particles >4µm   |          | ASTM D7647   | >5000           | 1238                    | 680         | 250         |
| Particles >6µm   |          | ASTM D7647   | >1300           | 332                     | 152         | 70          |
| Particles >14µm  |          | ASTM D7647   | >160            | 32                      | 9           | 7           |
| Particles >21µm  |          | ASTM D7647   | >40             | 11                      | 3           | 3           |
| Particles >38µm  |          | ASTM D7647   | >10             | 1                       | 1           | 0           |
| Particles >71µm  |          | ASTM D7647   | >3              | 0                       | 0           | 0           |
| Oil Cleanliness  |          | ISO 4406 (c) | >19/17/14       | 17/16/12                | 17/14/10    | 15/13/10    |
| FLUID DEGRADA    | ATION    | method       | limit/base      | current                 | history1    | history2    |
| Acid Number (AN) | mg KOH/g | ASTM D8045   | 0.57            | 0.38                    | 0.45        | 0.35        |



## **OIL ANALYSIS REPORT**

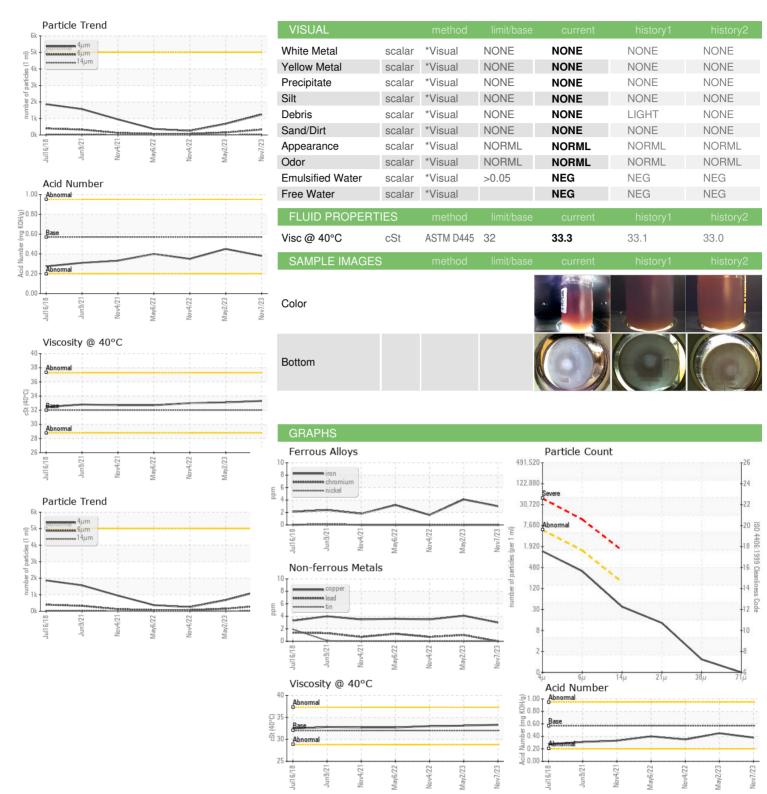





Certificate L2367

Laboratory Sample No.

Lab Number **Unique Number** 

: 06011472 : 10750616 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 17 Nov 2023 : WC0591951 Received Diagnosed : 20 Nov 2023 : Wes Davis Diagnostician

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) **EXPLORER PIPELINE** 

1683 PINE VALLEY DR OWENSVILLE, MO US 65066

Contact: RANDY VINYARD

rvinyard@expl.com T: (618)540-9562

Contact/Location: RANDY VINYARD - EXPOWE

F: