


# OIL ANALYSIS REPORT

Sample Rating Trend

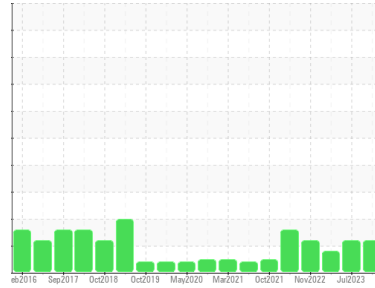

Machine Id  
**CATERPILLAR 990 LOADER G 6427 (S/N BCR00127)**  
Component  
**Hydraulic System**  
Fluid  
**TULCO LUBSOIL SUPER HYDRAULIC HZ 46 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is a high amount of silt (particulates < 14 microns in size) present in the oil.

**Fluid Condition**  
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>TO10002885</b>	TO10002400	TO10001755
Sample Date	Client Info		<b>13 Nov 2023</b>	18 Jul 2023	27 Mar 2023
Machine Age	hrs	Client Info	<b>48135</b>	47549	47048
Oil Age	hrs	Client Info	<b>2587</b>	2001	1500
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>8</b>	14	9
Chromium	ppm	ASTM D5185m >20	<b>3</b>	6	4
Nickel	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	1	<1
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >20	<b>4</b>	8	8
Tin	ppm	ASTM D5185m >20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>87</b>	74	67
Calcium	ppm	ASTM D5185m	<b>119</b>	136	109
Phosphorus	ppm	ASTM D5185m	<b>783</b>	1052	984
Zinc	ppm	ASTM D5185m	<b>1019</b>	1366	1247
Sulfur	ppm	ASTM D5185m	<b>2678</b>	4483	4101

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>4</b>	3	4
Sodium	ppm	ASTM D5185m	<b>3</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Water	%	ASTM D6304 >0.05	<b>NEG</b>	NEG	NEG






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 60672</b>	▲ 42841	▲ 10239
Particles >6µm	ASTM D7647	>1300	<b>▲ 4918</b>	▲ 3927	1226
Particles >14µm	ASTM D7647	>160	<b>57</b>	16	55
Particles >21µm	ASTM D7647	>40	<b>14</b>	3	8
Particles >38µm	ASTM D7647	>10	<b>1</b>	0	2
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 23/19/13</b>	▲ 23/19/11	▲ 21/17/13

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.70</b>	1.07	0.91


# OIL ANALYSIS REPORT

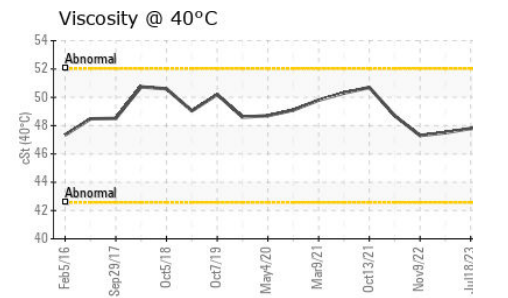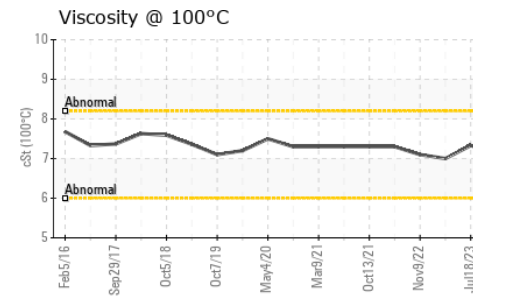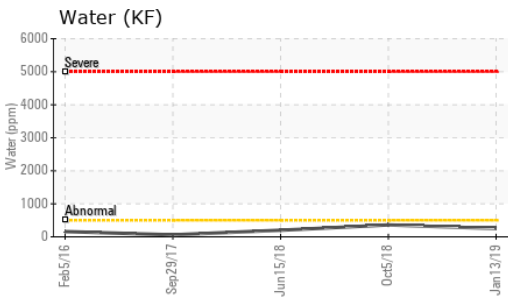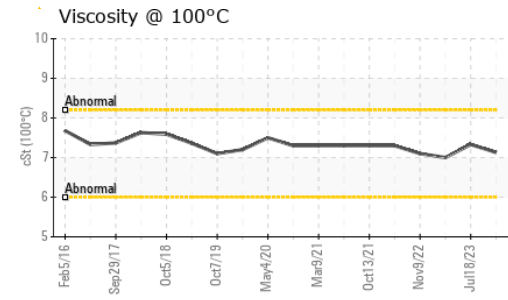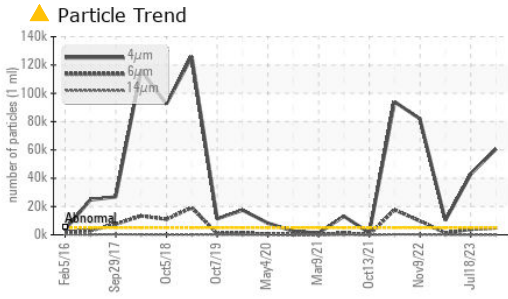






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	47.9	47.8	47.5
Visc @ 100°C	cSt	ASTM D445	7.13	7.33	7
Viscosity Index (VI)	Scale	ASTM D2270	107	114	103

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

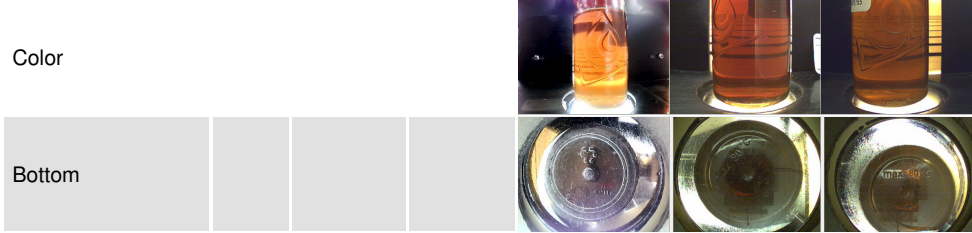

## GRAPHS

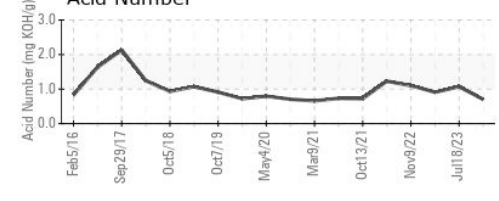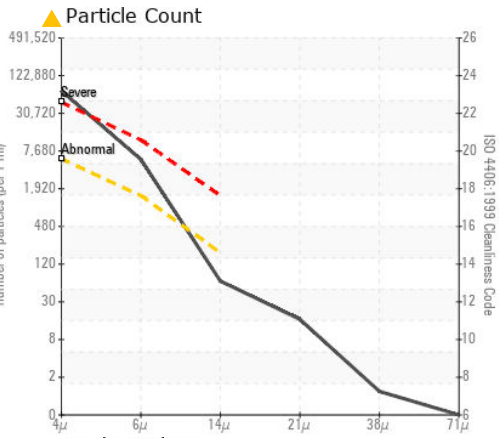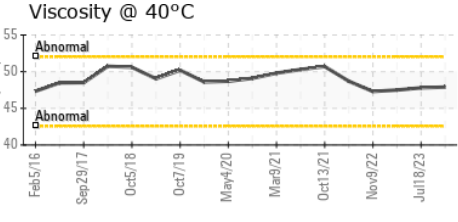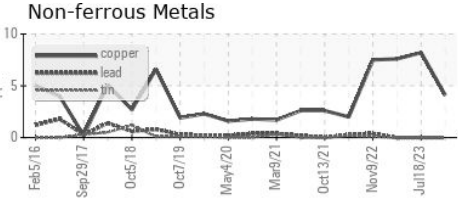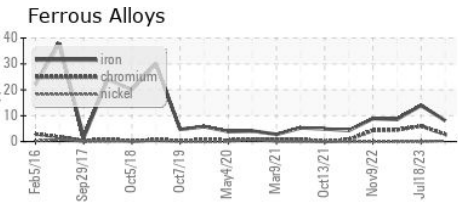

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO10002885 **Received** : 17 Nov 2023  
**Lab Number** : 06011488 **Diagnosed** : 29 Nov 2023  
**Unique Number** : 10750632 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: KF, KV100, VI )

**ANCHOR STONE TULSA ROCK**  
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE  
 TULSA, OK  
 US 74137  
 Contact: MIKE SNYDER  
 msnyder@anchorstoneco.com  
 T: (417)850-9635  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)