

PROBLEM SUMMARY

Sample Rating Trend



Machine Id


KAESER BSD 60 3108166 (S/N 1162)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

COMPONENT CONDITION SUMMARY

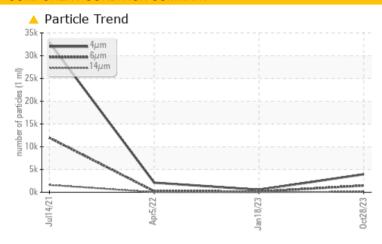

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ATTENTION	NORMAL	NORMAL				
Particles >6μm	ASTM D7647	>1300	1470	134	227				
Particles >14μm	ASTM D7647	>80	114	22	19				
Oil Cleanliness	ISO 4406 (c)	>/17/13	19/18/14	16/14/12	15/11				

Customer Id: BWTHUM Sample No.: KCPA006944 Lab Number: 06011514 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

18 Jan 2023 Diag: Angela Borella

NORMAL



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



05 Apr 2022 Diag: Doug Bogart

NORMAL



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



14 Jul 2021 Diag: Angela Borella

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend

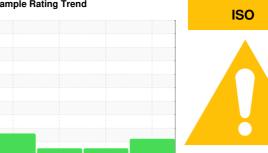

KAESER BSD 60 3108166 (S/N 1162)

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jul202	Apr2022	Jan2023 Oc	12023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA006944	KCP52959	KCP45319
Sample Date		Client Info		28 Oct 2023	18 Jan 2023	05 Apr 2022
Machine Age	hrs	Client Info		6696	69956	63082
Oil Age	hrs	Client Info		0	3807	3122
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ATTENTION	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	1	1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	<1
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	8	8	4
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	0	3	57
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	1	1
Magnesium	ppm	ASTM D5185m	90	0	66	90
Calcium	ppm	ASTM D5185m	2	0	<1	1
Phosphorus	ppm	ASTM D5185m		0	28	7
Zinc	ppm	ASTM D5185m		0	6	0
Sulfur	ppm	ASTM D5185m		17591	20910	15912
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	2	<1
Sodium	ppm	ASTM D5185m		9	20	16
Potassium	ppm	ASTM D5185m	>20	1	3	2
Water	%	ASTM D6304	>0.05	0.012	0.012	0.018
ppm Water	ppm	ASTM D6304	>500	122.7	121.2	188.5
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3951	558	2105
Particles >6µm		ASTM D7647	>1300	<u> </u>	134	227
Particles >14µm		ASTM D7647	>80	<u> </u>	22	19
Particles >21µm		ASTM D7647	>20	20	10	7
Particles >38µm		ASTM D7647	>4	0	4	0
Particles >71µm		ASTM D7647	>3	0	3	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>	16/14/12	15/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	1/011/	10T11 D0015	0.4		0.44	0.40



OIL ANALYSIS REPORT

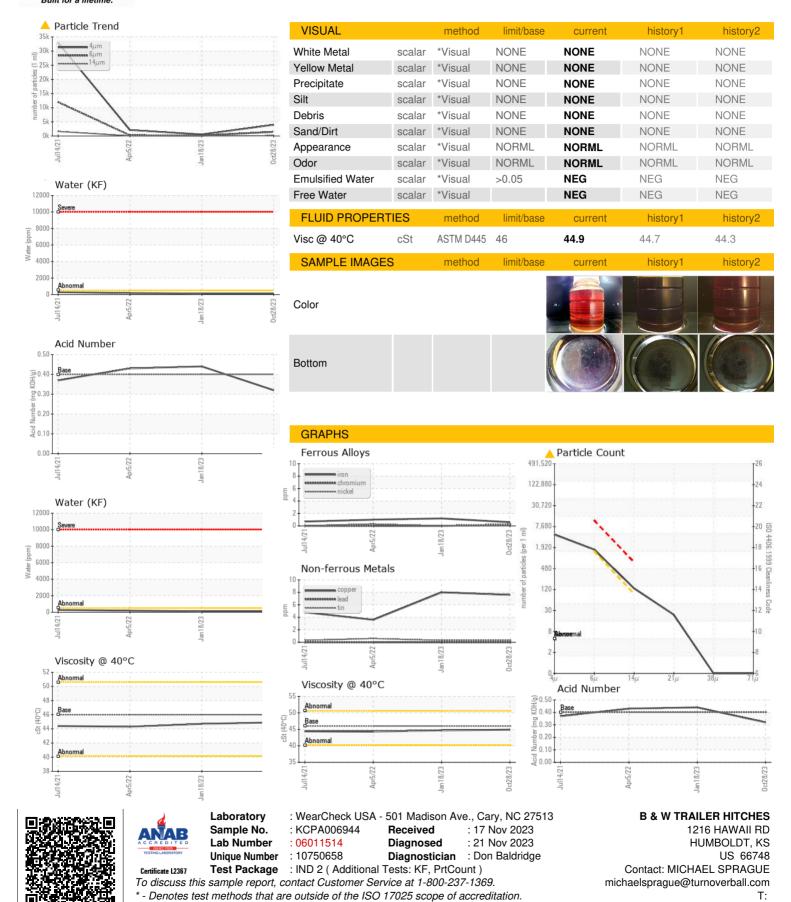

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: