


PROBLEM SUMMARY

KAESER SM 10T 8430426 (S/N 1266)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

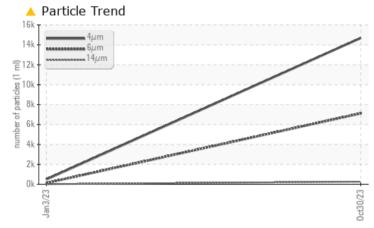

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Jan doza Oczówcza

ISO

Sample Rating Trend

PROBLEMATIC TEST	RESULTS				
Sample Status			ABNORMAL	NORMAL	
Particles >6µm	ASTM D7647	>1300	<u> </u>	122	
Particles >14µm	ASTM D7647	>80	🔺 258	14	
Particles >21µm	ASTM D7647	>20	A 31	2	
Oil Cleanliness	ISO 4406 (c)	>/17/13	A 21/20/15	16/14/11	

Customer Id: ALRCOL Sample No.: KCPA009135 Lab Number: 06011518 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

03 Jan 2023 Diag: Jonathan Hester



to our 2020 Blag. Containan ries



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Machine Id KAESER SM 10T 8430426 (S/N 1266) Component

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009135	KCP55527	
Sample Date		Client Info		30 Oct 2023	03 Jan 2023	
Machine Age	hrs	Client Info		5615	3072	
Oil Age	hrs	Client Info		0	3072	
Oil Changed		Client Info		N/A	Changed	
Sample Status				ABNORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	<1	0	
Titanium		ASTM D5185m	>3	<1	0	
Silver	ppm		>2	0	0	
	ppm	ASTM D5185m				
Aluminum	ppm	ASTM D5185m	>10	<1	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm		>50	22	<1	
Tin	ppm	ASTM D5185m	>10	0	0	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		<1	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	0	76	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	100	0	94	
Calcium	ppm	ASTM D5185m	0	0	0	
Phosphorus	ppm	ASTM D5185m	0	0	20	
Zinc	ppm	ASTM D5185m	0	0	0	
Sulfur	ppm	ASTM D5185m	23500	16847	22570	
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m		2	1	
Potassium	ppm	ASTM D5185m	>20	- <1	0	
Water	%	ASTM D6304	>0.05	0.007	0.021	
ppm Water	ppm	ASTM D6304	>500	72.4	219.7	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		14688	484	
Particles >6µm		ASTM D7647	>1300	A 7123	122	
Particles >14µm		ASTM D7647	>80	A 258	14	
Particles >21µm		ASTM D7647		▲ 31	2	
Particles >38µm		ASTM D7647	>4	1	0	
Particles >71µm		ASTM D7647		0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	▲ 21/20/15	16/14/11	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.28	0.40	
	ing non ng			0.20	0.40	




Built for a lifetime.

OIL ANALYSIS REPORT






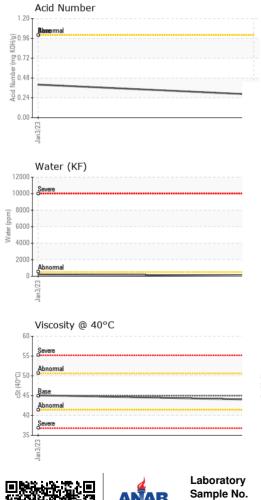

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	44.0	45.1	
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color				».		no image
Bottom						no image
GRAPHS						
Ferrous Alloys			491,520	Particle Count	:	т26
8 iron			431,320	1		1 ²⁰
6 - nickel			122,880	-		-24
4			30,720			-22
2-			7,680			-20
an 3/23				1		-18
E una			ct30/23 0er 1 ml		a harris and harris a	-18 -

Bo

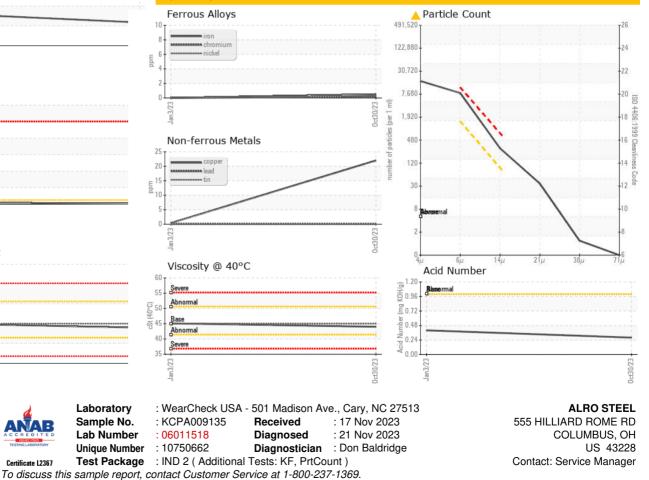

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: Service Manager - ALRCOL

T:

F: