


KAESER COMPRESSORS Built for a lifetime."

Machine Id 8005240 (S/N 1211) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

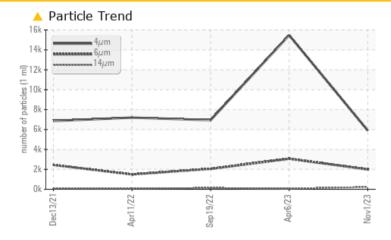

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS Sample Status ABNORMAL ABNORMAL **ATTENTION** Particles >6µm ASTM D7647 >1300 **1995** ▲ 3067 ▲ 2052 Particles >14µm ASTM D7647 >80 221 59 **1**27 ▲ Particles >21µm 7 ASTM D7647 >20 64 22 **Oil Cleanliness** ISO 4406 (c) >--/17/13 **A 20/18/15** 21/19/13 ▲ 20/18/14


Customer Id: INTCHENJ Sample No.: KCPA006447 Lab Number: 06011530 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

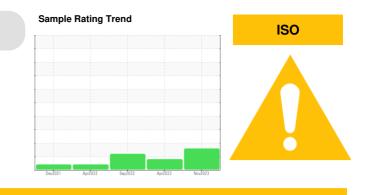

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

06 Apr 2023 Diag: Don Baldridge

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

19 Sep 2022 Diag: Angela Borella

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



11 Apr 2022 Diag: Don Baldridge

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






view report

Report Id: INTCHENJ [WUSCAR] 06011530 (Generated: 11/21/2023 14:55:14) Rev: 1



OIL ANALYSIS REPORT

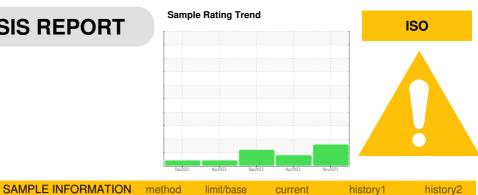

Machine Id 8005240 (S/N 1211) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAWFLE INFUN		method	IIIII/Dase	current	TISTOLA	TIStory2
Sample Number		Client Info		KCPA006447	KCPA002718	KCP45981
Sample Date		Client Info		01 Nov 2023	06 Apr 2023	19 Sep 2022
Machine Age	hrs	Client Info		20528	15561	10745
Oil Age	hrs	Client Info		0	0	3859
Oil Changed		Client Info		N/A	N/A	Changed
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	8	2	10
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	0	2
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	100	0	37	30
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	0	4	6
Zinc	ppm	ASTM D5185m	0	0	9	74
Sulfur	ppm	ASTM D5185m	23500	13329	23243	22898
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		2	13	15
Potassium	ppm	ASTM D5185m	>20	0	5	15
Water	%	ASTM D6304	>0.05	0.007	0.016	0.019
ppm Water	ppm	ASTM D6304	>500	72.0	169.5	194.5
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		5899	15474	6941
Particles >6µm		ASTM D7647	>1300	<u> </u>	A 3067	<u> </u>
Particles >14µm		ASTM D7647	>80	<u> </u>	59	1 27
Particles >21µm		ASTM D7647	>20	<u> </u>	7	22
Particles >38µm		ASTM D7647	>4	3	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 20/18/15	1 /19/13	▲ 20/18/14
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.40	0.37	0.37



OIL ANALYSIS REPORT




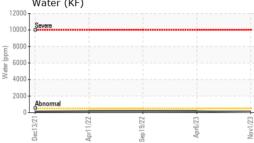


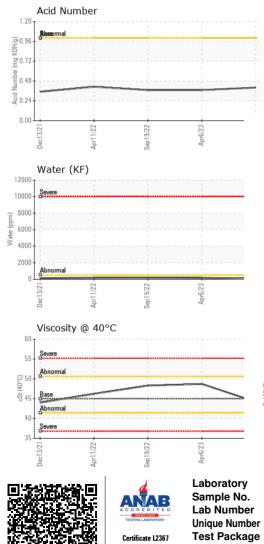

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	44.2	48.7	48.3
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color						





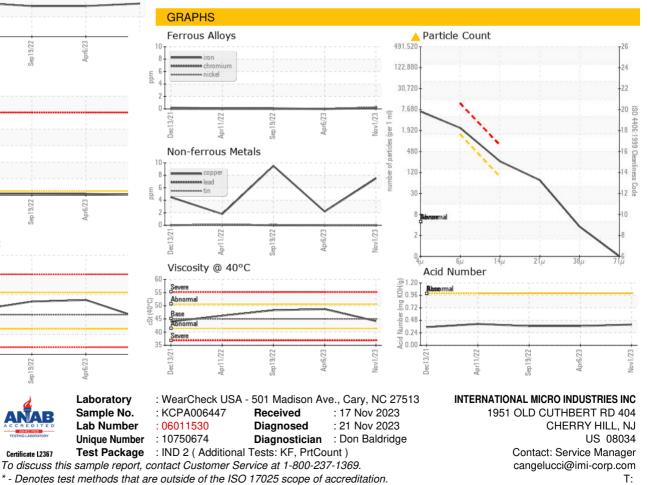

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - INTCHENJ

F: