



PROBLEM SUMMARY

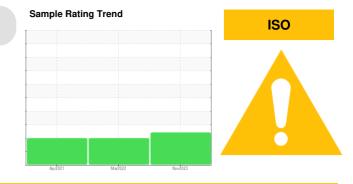

Machine Id 6825515 (S/N 2076) Component

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

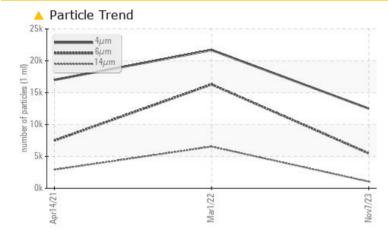

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

THOBELMINTIO TEOTTIE					
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL
Particles >6µm	ASTM D7647	>1300	<u> </u>	16294	▲ 7482
Particles >14µm	ASTM D7647	>80	A 1037	6539	<u> </u>
Particles >21µm	ASTM D7647	>20	<u> </u>	1 457	1124
Particles >38µm	ASTM D7647	>4	<mark>/</mark> 8	1 09	1 01
Particles >71µm	ASTM D7647	>3	<u> </u>	<u> </u>	<u> </u>
Oil Cleanliness	ISO 4406 (c)	>/17/13	A 21/20/17	1 /20	2 0/19

Customer Id: PILWIN Sample No.: KCPA006442 Lab Number: 06011532 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

01 Mar 2022 Diag: Don Baldridge

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



14 Apr 2021 Diag: Don Baldridge

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

SAMPLE INFORMATION method limit/base

Sample Rating Trend ISO

current

history1

historv2

Machine Id 6825515 (S/N 2076) Component

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA006442	KCP38285	KCP11027
Sample Date		Client Info		07 Nov 2023	01 Mar 2022	14 Apr 2021
Machine Age	hrs	Client Info		25376	14608	7056
Oil Age	hrs	Client Info		0	3000	3000
Oil Changed		Client Info		N/A	Changed	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	0
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m		8	10	3
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	10
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	00	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	0	0	41
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m	-	0	4	7
Zinc	ppm	ASTM D5185m		0	0	23
Sulfur	ppm	ASTM D5185m		15944	15126	18650
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	0
Sodium	ppm	ASTM D5185m		1	0	11
Potassium	ppm	ASTM D5185m	>20	0	0	5
Water	%	ASTM D6304		0.008	0.004	0.029
ppm Water	ppm	ASTM D6304		81.9	44.5	294.2
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		12500	21680	17000
Particles >6µm		ASTM D7647	>1300	4 5478	▲ 16294	▲ 7482
Particles >14µm		ASTM D7647	>80	1037	▲ 6539	2 908
Particles >21µm		ASTM D7647	>20	<u> </u>	1 457	1 124
Particles >38µm		ASTM D7647	>4	A 8	1 09	1 01
Particles >71µm		ASTM D7647	>3	<u> </u>	<u> </u>	 5
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 21/20/17	1 /20	▲ 20/19
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.25	0.41	0.382
	ing itoring	, 10 H 100+0	0	toot/Location: T		


Report Id: PILWIN [WUSCAR] 06011532 (Generated: 11/21/2023 17:02:57) Rev: 1


Contact/Location: THOMAS STONER JR - PILWIN



OIL ANALYSIS REPORT

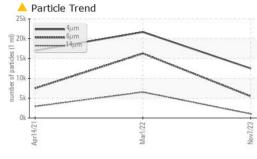

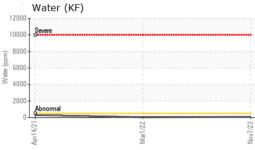

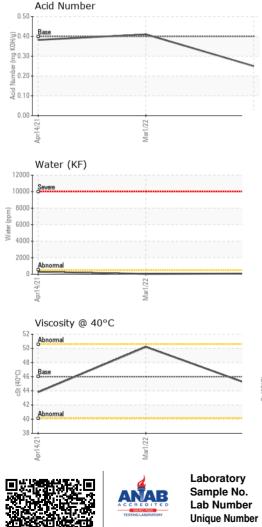

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.7	50.2	43.8
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color				a		
					161	California I

Bottom

