




OIL ANALYSIS REPORT

Sample Rating Trend

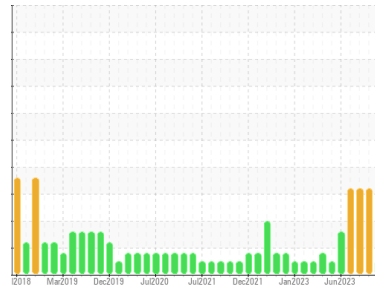

NORMAL



Area
IRIG [6193561]
 Machine Id
IRIG-PRM-PMUD-0301 IRIG-PRM-PMUD-0301 #1 MUD PUMP
 Component
Pump
 Fluid
MOBIL SHC 632 (140 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		HLC0002834	HLC0002802	HLC0002710
Sample Date	Client Info		02 Nov 2023	09 Sep 2023	05 Aug 2023
Machine Age	hrs	Client Info	19025	18571	18220
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Filtered	Filtered	N/A
Sample Status			NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	40	48	53
Chromium	ppm	ASTM D5185m >5	2	2	2
Nickel	ppm	ASTM D5185m >5	<1	0	0
Titanium	ppm	ASTM D5185m >3	2	2	2
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >7	19	▲ 30	▲ 30
Lead	ppm	ASTM D5185m >12	0	0	0
Copper	ppm	ASTM D5185m >30	4	4	4
Tin	ppm	ASTM D5185m >9	<1	0	<1
Vanadium	ppm	ASTM D5185m	<1	<1	<1
Cadmium	ppm	ASTM D5185m	<1	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	2
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	0	9
Calcium	ppm	ASTM D5185m	0	12	14
Phosphorus	ppm	ASTM D5185m	354	381	445
Zinc	ppm	ASTM D5185m	0	0	33
Sulfur	ppm	ASTM D5185m	0	30	2

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >60	54	▲ 63	▲ 67
Sodium	ppm	ASTM D5185m	21	29	32
Potassium	ppm	ASTM D5185m >20	15	18	20



FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>320000	---	147448	222876
Particles >6µm	ASTM D7647	>40000	---	▲ 69280	▲ 72019
Particles >14µm	ASTM D7647	>640	---	351	107
Particles >21µm	ASTM D7647	>160	---	42	8
Particles >38µm	ASTM D7647	>40	---	3	2
Particles >71µm	ASTM D7647	>10	---	1	2
Oil Cleanliness	ISO 4406 (c)	>25/22/16	---	▲ 24/23/16	▲ 25/23/14

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.37	0.30	0.33


OIL ANALYSIS REPORT

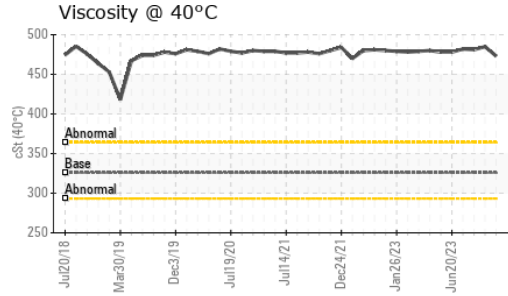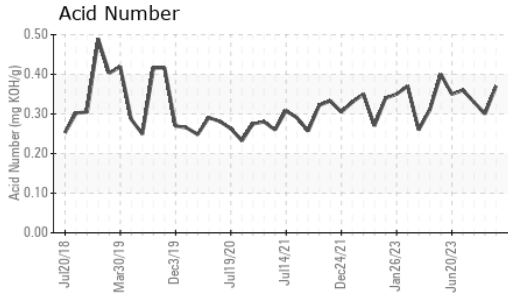





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	325.8	473	485	481

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

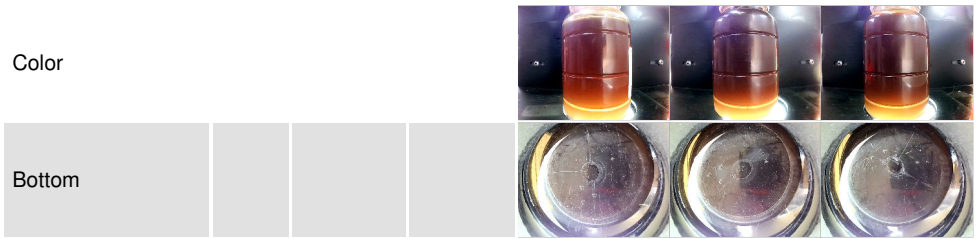

GRAPHS

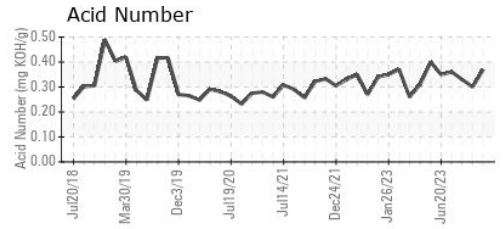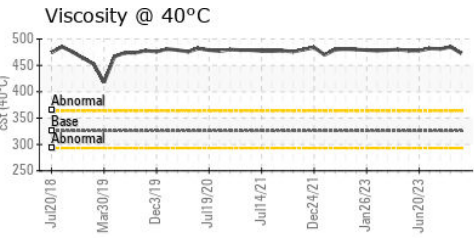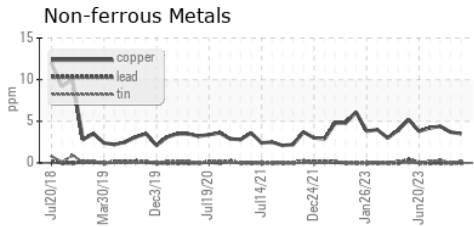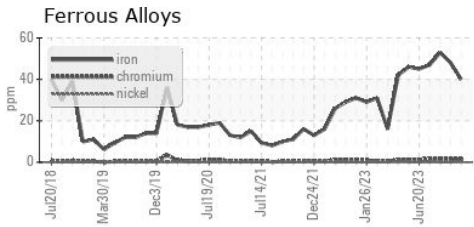

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HLC0002834 **Received** : 17 Nov 2023
Lab Number : 06011554 **Diagnosed** : 22 Nov 2023
Unique Number : 10750698 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: PrtCount)

HILCORP EXPLORATION ALASKA - MILNE POINT
 1000 MILNE POINT RD
 PRUDOE BAY, AK
 US 99734
 Contact: Evan Reilly
 evan.reilly@hilcorp.com
 T: (907)670-3231
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)