




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
Grand River CAT 1 GRRM01BE
 Component
Biogas Engine
 Fluid
CHEVRON HDAX 6500 LFG GAS ENGINE OIL (--- GAL)

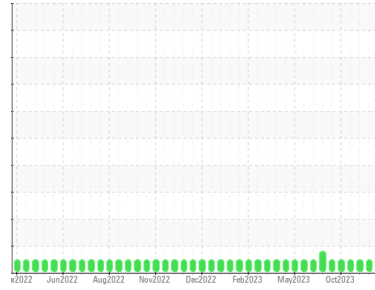

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0724907	WC0724906	WC0724914
Sample Date	Client Info		15 Nov 2023	07 Nov 2023	30 Oct 2023
Machine Age	hrs	Client Info	70915	70723	70531
Oil Age	hrs	Client Info	1199	1007	815
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.1	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >15	2	0	2
Chromium	ppm	ASTM D5185m >4	<1	0	<1
Nickel	ppm	ASTM D5185m >2	0	0	<1
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m >5	0	0	0
Aluminum	ppm	ASTM D5185m >6	2	<1	2
Lead	ppm	ASTM D5185m >9	3	1	2
Copper	ppm	ASTM D5185m >14	3	1	1
Tin	ppm	ASTM D5185m >4	1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	<1
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6	0	1
Barium	ppm	ASTM D5185m	0	2	<1
Molybdenum	ppm	ASTM D5185m	4	0	2
Manganese	ppm	ASTM D5185m	<1	<1	0
Magnesium	ppm	ASTM D5185m	0	13	11
Calcium	ppm	ASTM D5185m	1943	1623	1837
Phosphorus	ppm	ASTM D5185m	293	265	289
Zinc	ppm	ASTM D5185m	379	350	366
Sulfur	ppm	ASTM D5185m	1680	1519	2110

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >181	41	36	35
Sodium	ppm	ASTM D5185m	1	<1	1
Potassium	ppm	ASTM D5185m >20	0	<1	2

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	0	0
Nitration	Abs/cm	*ASTM D7624 >20	8.8	8.1	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.9	18.1	17.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.0	15.3	13.8
Acid Number (AN)	mg KOH/g	ASTM D8045 1.2	1.56	1.60	1.15
Base Number (BN)	mg KOH/g	ASTM D2896 4.5	3.48	3.83	2.67











OIL ANALYSIS REPORT

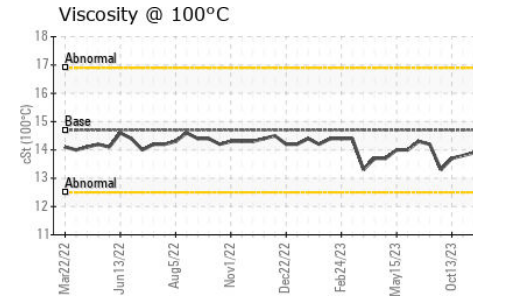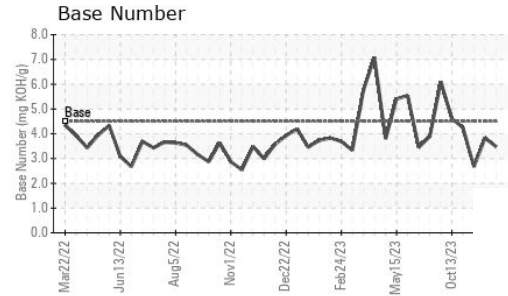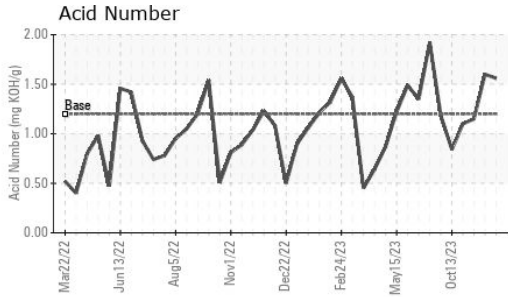

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.7	14.0	13.9

GRAPHS

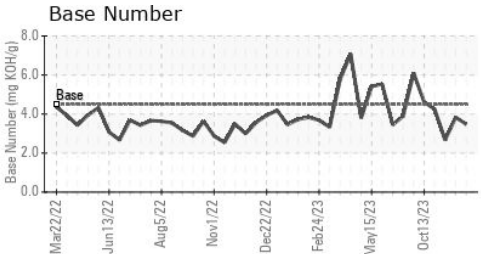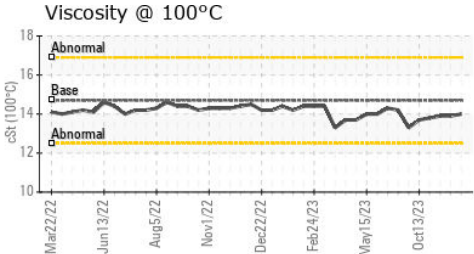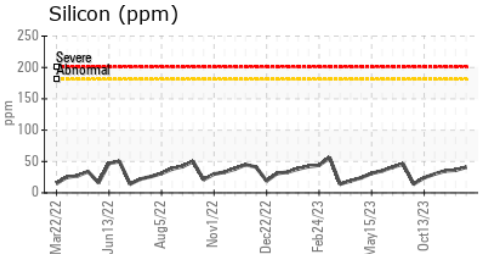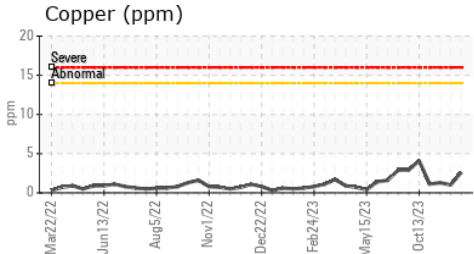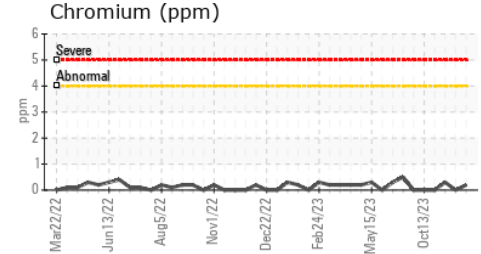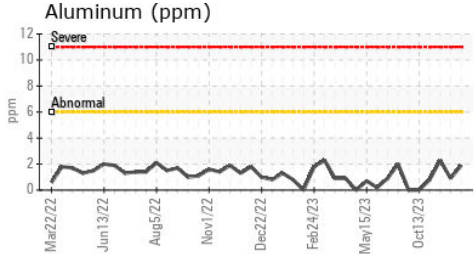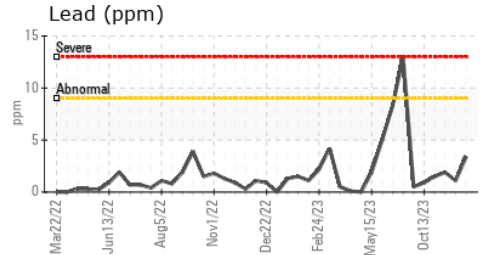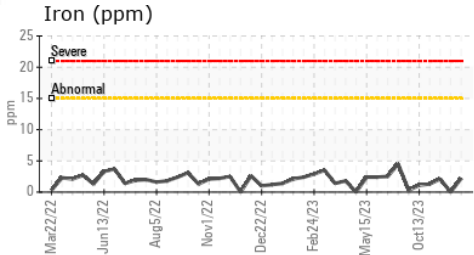

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0724907 **Received** : 17 Nov 2023
Lab Number : 06011625 **Diagnosed** : 21 Nov 2023
Unique Number : 10750769 **Diagnostician** : Don Baldrige
Test Package : MOB 2

EDL NA Recips-Grand River
 Grand River Powerstation, 8550 West Grand River Hwy
 Grand Ledge, MI
 US 48837
 Contact: JAMES ALEXANDER
 james.alexander@edlenergy.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)