




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

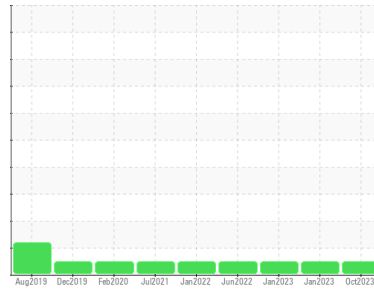

Machine Id  
**INTERNATIONAL 1937**

Component  
**Diesel Engine**

Fluid  
**VALVOLINE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>IL0033223</b>	IL05743910	IL05743896
Sample Date	Client Info		<b>10 Oct 2023</b>	10 Jan 2023	10 Jan 2023
Machine Age	mls	Client Info	<b>368049</b>	306316	306316
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>18</b>	27	25
Chromium	ppm	ASTM D5185m >20	<b>1</b>	1	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	5	6
Lead	ppm	ASTM D5185m >40	<b>4</b>	11	8
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 39	<b>32</b>	44	23
Barium	ppm	ASTM D5185m 1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 49	<b>76</b>	77	69
Manganese	ppm	ASTM D5185m 1	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 616	<b>664</b>	529	644
Calcium	ppm	ASTM D5185m 1554	<b>1317</b>	1356	1296
Phosphorus	ppm	ASTM D5185m 899	<b>825</b>	854	775
Zinc	ppm	ASTM D5185m 1069	<b>1034</b>	1113	1014
Sulfur	ppm	ASTM D5185m 2624	<b>2561</b>	2992	2979

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	6	7
Sodium	ppm	ASTM D5185m	<b>3</b>	3	3
Potassium	ppm	ASTM D5185m >20	<b>0</b>	6	14

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.5	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.4</b>	10.0	11.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.8</b>	26.3	25.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.8</b>	21.7	21.6
Base Number (BN)	mg KOH/g	ASTM D2896 6.9	<b>5.4</b>	5.0	5.6







# OIL ANALYSIS REPORT

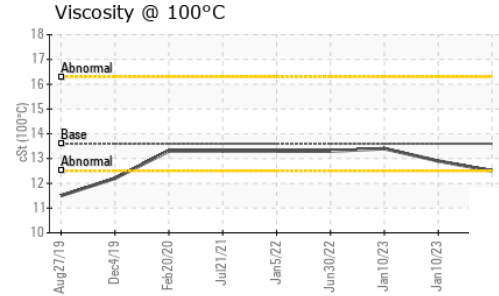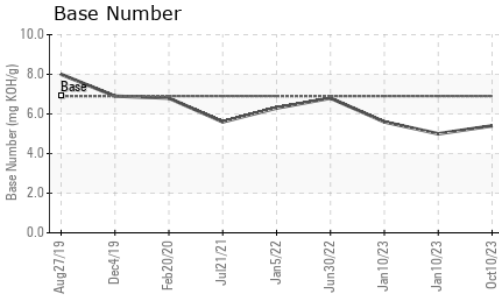

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.6	<b>12.5</b>	12.9	13.4

## GRAPHS

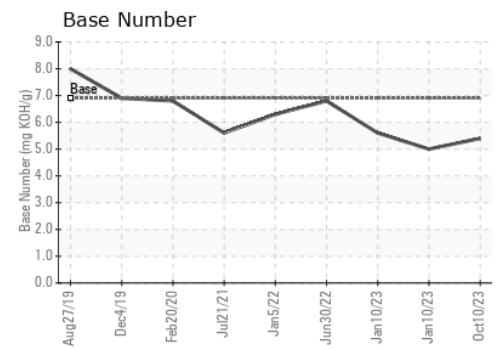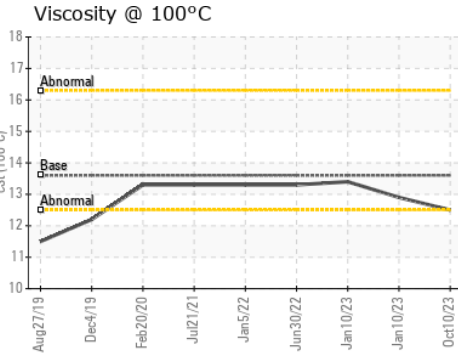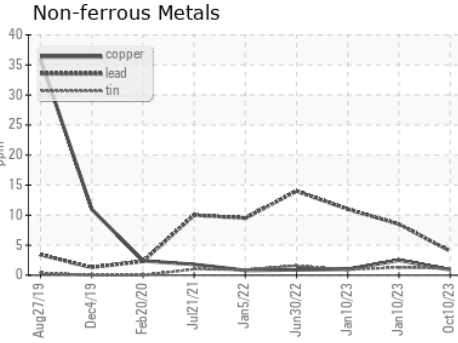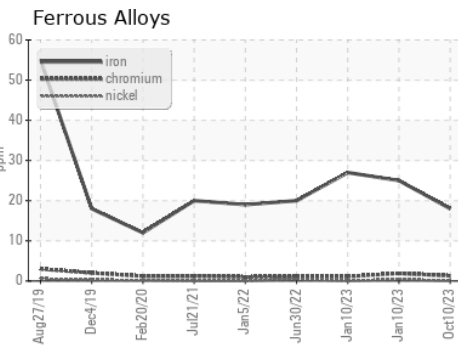

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL0033223 **Received** : 20 Nov 2023  
**Lab Number** : 06011910 **Diagnosed** : 21 Nov 2023  
**Unique Number** : 10751054 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**TAMPA IDEALEASE**  
 5951 ORIENT ROAD  
 TAMPA, FL  
 US 33610-9565  
 Contact: Russ Cook  
 russcook@idealease.com  
 T: (813)626-9285  
 F: (844)270-1356

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)