




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**OKLAHOMA/102**  
 Machine Id  
**74.30 [OKLAHOMA^102]**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

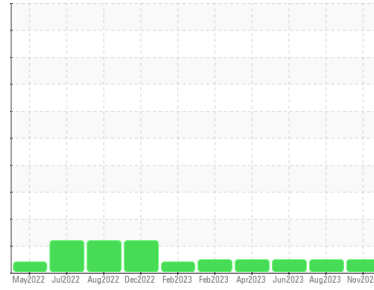

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0857259</b>	WC0834024	WC0808061
Sample Date	Client Info		<b>10 Nov 2023</b>	02 Aug 2023	02 Jun 2023
Machine Age	hrs	Client Info	<b>2200</b>	1990	1745
Oil Age	hrs	Client Info	<b>210</b>	245	445
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>20</b>	18	37
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	1
Copper	ppm	ASTM D5185m >330	<b>10</b>	22	80
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>51</b>	31	25
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>59</b>	40	42
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>700</b>	469	541
Calcium	ppm	ASTM D5185m	<b>2400</b>	1617	1830
Phosphorus	ppm	ASTM D5185m	<b>1059</b>	725	789
Zinc	ppm	ASTM D5185m	<b>1282</b>	875	971
Sulfur	ppm	ASTM D5185m	<b>4106</b>	2423	2865

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>9</b>	6	8
Sodium	ppm	ASTM D5185m	<b>1</b>	0	3
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	0

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.3	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.7</b>	7.8	10.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.6</b>	22.2	24.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.4</b>	20.0	23.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>9.5</b>	9.0	8.9







# OIL ANALYSIS REPORT

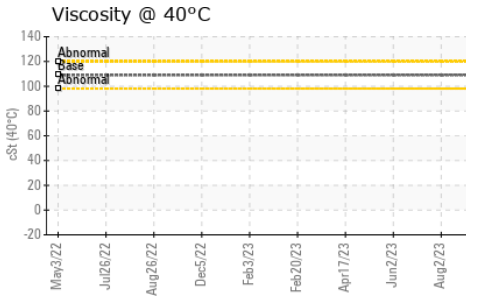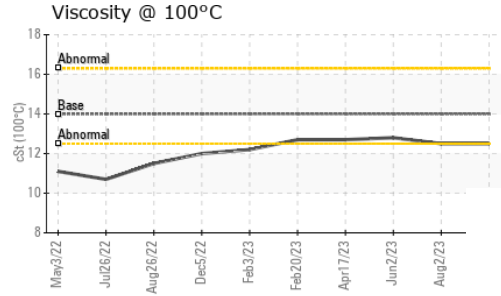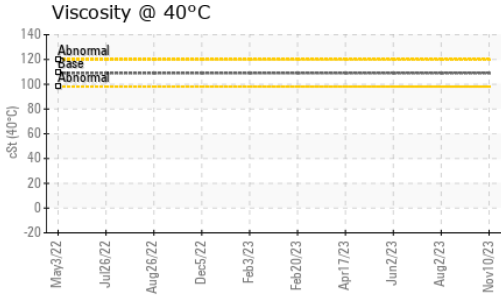

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	<b>12.5</b>	12.5	12.8

## GRAPHS

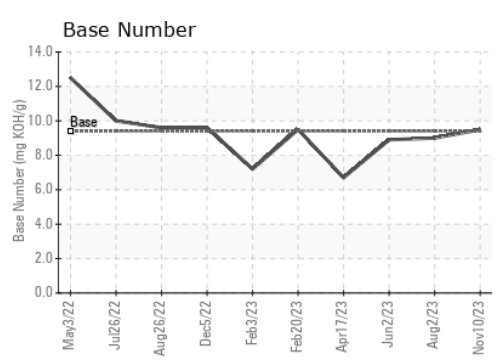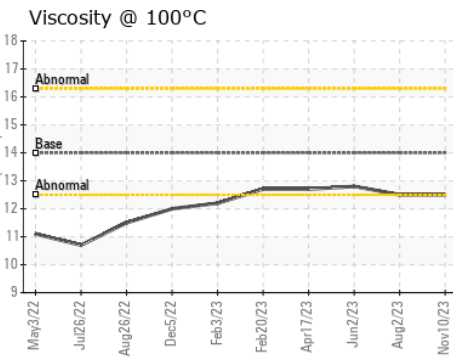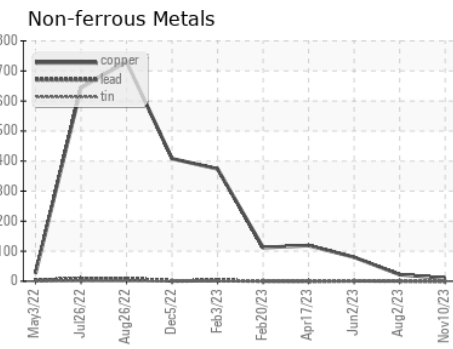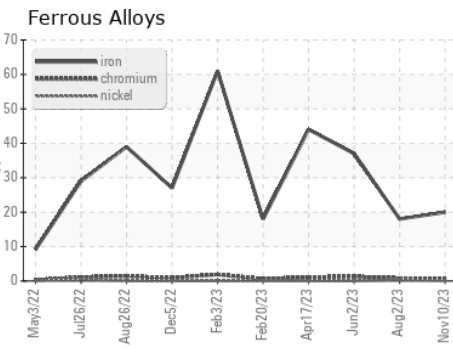

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0857259 **Received** : 20 Nov 2023  
**Lab Number** : **06012048** **Diagnosed** : 21 Nov 2023  
**Unique Number** : 10751192 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: KV40, TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: SHAWN SOUTH  
 shawn.south@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:  
F: x: