




# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**



Machine Id  
**CATERPILLAR 336 F 8324 (S/N RKB00916)**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON XL SYN BLEND 15W40 (--- GAL)**

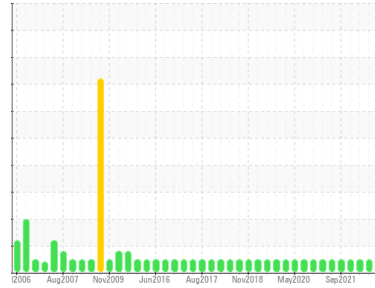

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0863022</b>	WC0775869	WC0734392
Sample Date	Client Info		<b>10 Nov 2023</b>	12 Jan 2023	14 Oct 2022
Machine Age	hrs	Client Info	<b>13396</b>	12867	12613
Oil Age	hrs	Client Info	<b>529</b>	254	673
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>23</b>	14	31
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	1
Nickel	ppm	ASTM D5185m >2	<b>2</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>9</b>	7	8
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	1	4
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 1	<b>3</b>	10	0
Barium	ppm	ASTM D5185m 1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	60	60
Manganese	ppm	ASTM D5185m 1	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>924</b>	894	948
Calcium	ppm	ASTM D5185m 1070	<b>1055</b>	1172	1206
Phosphorus	ppm	ASTM D5185m 1150	<b>1080</b>	992	942
Zinc	ppm	ASTM D5185m 1270	<b>1315</b>	1213	1254
Sulfur	ppm	ASTM D5185m 2060	<b>3254</b>	3603	3342

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	4	5
Sodium	ppm	ASTM D5185m	<b>2</b>	1	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	0

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.2</b>	0.5	1.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.2</b>	8.4	12.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.3</b>	19.2	24.6

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.4</b>	15.0	21.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.6	<b>8.0</b>	8.4	7.1







# OIL ANALYSIS REPORT

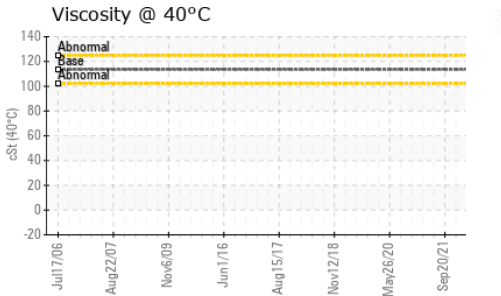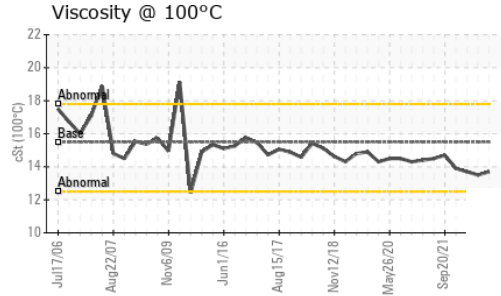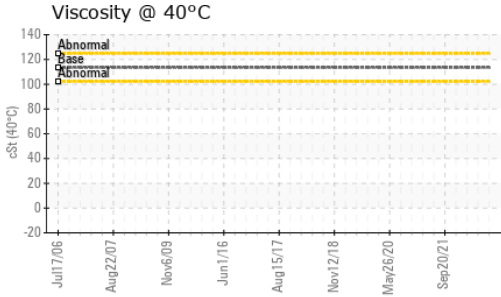

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	<b>13.7</b>	13.5	13.7

### GRAPHS

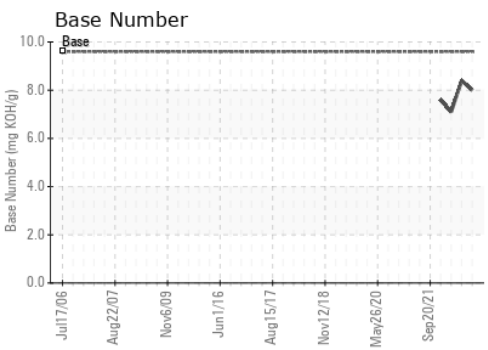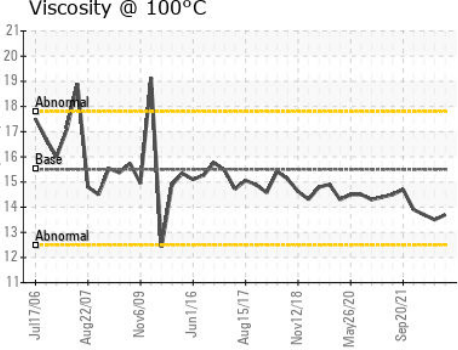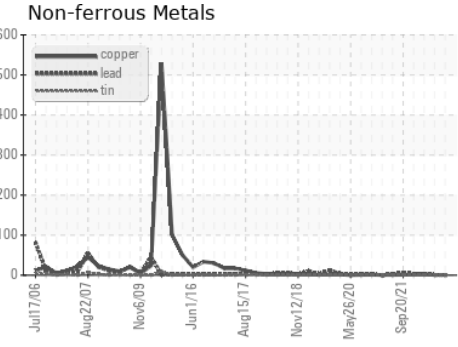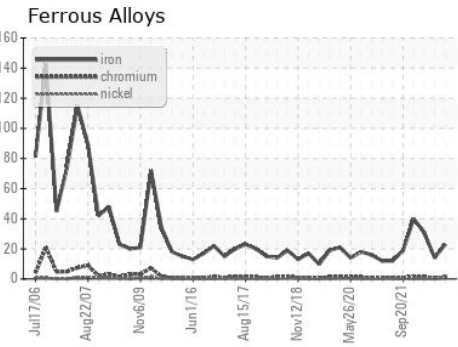

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0863022 **Received** : 20 Nov 2023  
**Lab Number** : **06012257** **Diagnosed** : 21 Nov 2023  
**Unique Number** : 10751401 **Diagnostician** : Sean Felton  
**Test Package** : CONST ( Additional Tests: KV40, TBN )

**TRADER CONSTRUCTION CO.**  
 PO DRAWER 1578  
 NEW BERN, NC  
 US 28563  
 Contact: MIKE WYATT  
 mwyatt@traderconstruction.com  
 T: (252)633-1399  
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)