

# **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL

#### Machine Id MASA 100 MASA 100 (S/N 202) Component

Hydraulic System

#### DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm.

#### Wear

All component wear rates are normal.

## Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Nov2023		
SAMPLE INFORM	<b>/IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		PTK0004830		
Sample Date		Client Info		10 Nov 2023		
Machine Age	mths	Client Info		0		
Oil Age	mths	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Fitanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
_ead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	<1		
Гin	ppm	ASTM D5185m	>20	0		
/anadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
	le le			-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Nolybdenum	ppm	ASTM D5185m	5	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	25	46		
Calcium	ppm	ASTM D5185m	200	<1		
Phosphorus	ppm	ASTM D5185m	300	246		
Zinc	ppm	ASTM D5185m	370	317		
Sulfur	ppm	ASTM D5185m	2500	595		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	722		
Particles >6µm		ASTM D7647	>1300	262		
Particles >14µm		ASTM D7647	>160	30		
Particles >21µm		ASTM D7647		7		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/12		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.22		
			5.5.			


Report Id: OLDTAC [WUSCAR] 06012355 (Generated: 11/21/2023 10:33:30) Rev: 1


Contact/Location: JULIEN LALONDE - OLDTAC




# **OIL ANALYSIS REPORT**



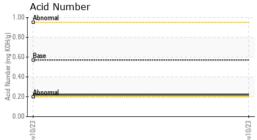

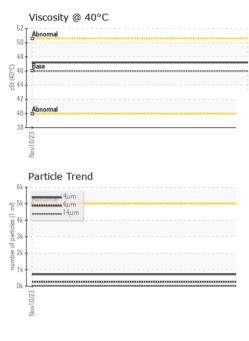

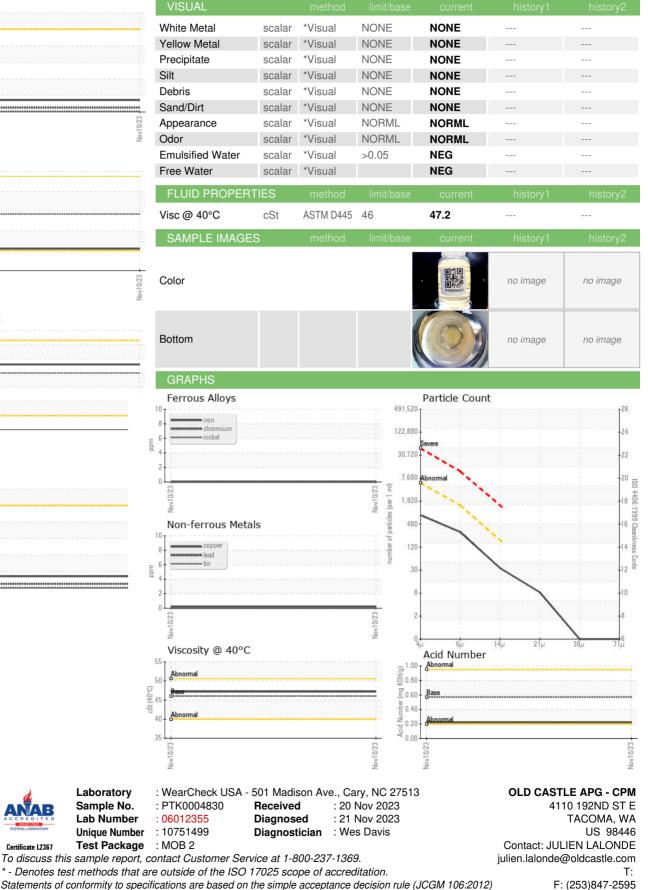

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Laboratory

Sample No.

Contact/Location: JULIEN LALONDE - OLDTAC