




OIL ANALYSIS REPORT

Sample Rating Trend

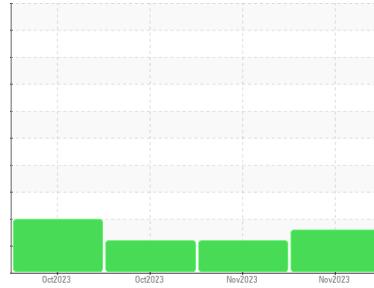

WATER



Area
RIG 813
 Machine Id
R813-MP-02
 Component
Gearbox
 Fluid
GEAR OIL ISO 320 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of water entry. Resample at the next service interval to monitor. There is too much water present in this sample to perform a particle count.

Wear

All component wear rates are normal.

Contamination

There is a moderate concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0013162	KL0013114	KL0012926
Sample Date	Client Info		14 Nov 2023	01 Nov 2023	24 Oct 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	25	8	13
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	5	<1	<1
Lead	ppm	ASTM D5185m	>50	2	<1	1
Copper	ppm	ASTM D5185m	>200	82	66	97
Tin	ppm	ASTM D5185m	>10	1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	50	2	0	<1
Barium	ppm	ASTM D5185m	15	0	<1	3
Molybdenum	ppm	ASTM D5185m	15	0	0	<1
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	50	0	0	2
Calcium	ppm	ASTM D5185m	50	28	4	7
Phosphorus	ppm	ASTM D5185m	350	126	144	179
Zinc	ppm	ASTM D5185m	100	31	39	42
Sulfur	ppm	ASTM D5185m	12500	8435	9018	13819

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	20	7	11
Sodium	ppm	ASTM D5185m		229	30	1
Potassium	ppm	ASTM D5185m	>20	32	2	3
Water	%	ASTM D6304	>0.2	▲ 0.433	NEG	NEG
ppm Water	ppm	ASTM D6304	>2000	▲ 4330	---	---

FLUID CLEANLINESS




	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	---	▲ 85721	▲ 87534
Particles >6µm	ASTM D7647	>5000	---	▲ 11786	▲ 10760
Particles >14µm	ASTM D7647	>640	---	111	183
Particles >21µm	ASTM D7647	>160	---	15	31
Particles >38µm	ASTM D7647	>40	---	0	0
Particles >71µm	ASTM D7647	>10	---	0	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	---	▲ 24/21/14	▲ 24/21/15

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.27	0.31	0.29




OIL ANALYSIS REPORT

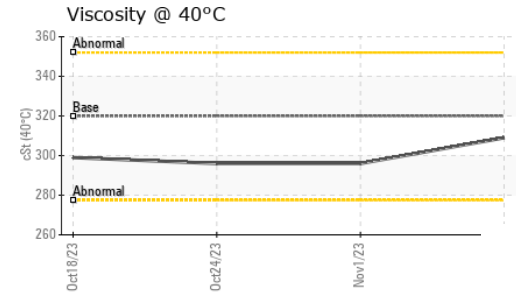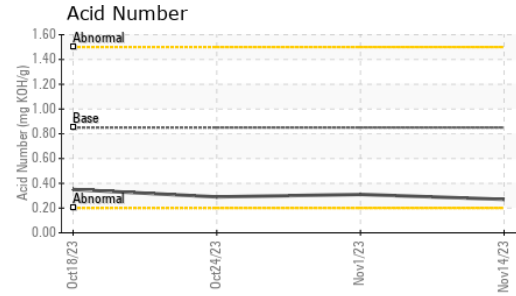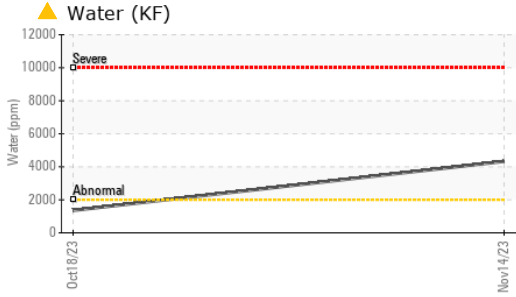





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	▲ 0.2%	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 320	309	296	296

SAMPLE IMAGES

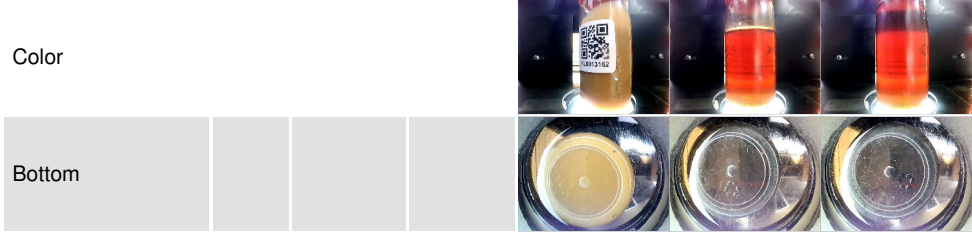

GRAPHS

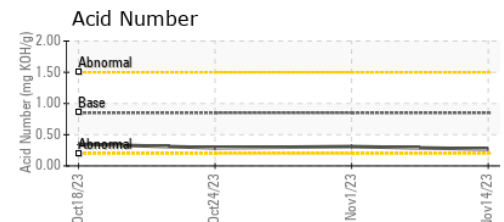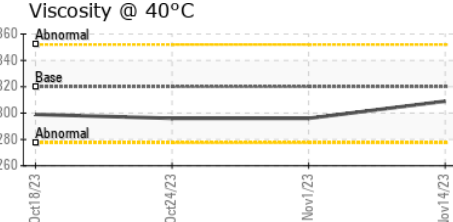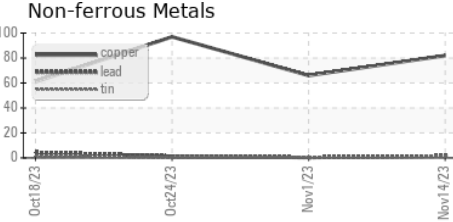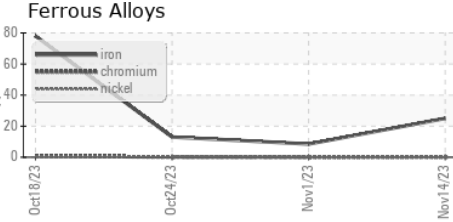

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0013162 **Received** : 20 Nov 2023
Lab Number : 06012380 **Diagnosed** : 22 Nov 2023
Unique Number : 10751524 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: KF, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PATTERSON - UTI DRILLING
 9915 WEST INDUSTRIAL
 MIDLAND, TX
 US 79706
 Contact: RICKY MATA
 ricky.mata@patenergy.com
 T: (832)219-4559
 F: (432)561-9388