

# **OIL ANALYSIS REPORT**

## KAESER ASD 40 4986593 (S/N 1008) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





SAMPLE INFORMATION method limit/base current history	/1 history2
Sample Number Client Info KC124779 KC110582	KC107328
Sample Date Client Info 13 Nov 2023 18 May 202	23 10 Jun 2022
Machine Age hrs Client Info 54057 53898	52862
Oil Age hrs Client Info <b>0</b> 1000	7362
Oil Changed Client Info N/A Not Chang	d Changed
Sample Status NORMAL ABNORMA	AL ABNORMAL
WEAR METALS method limit/base current history	/1 history2
Iron ppm ASTM D5185m >50 <1 2	<1
Chromium ppm ASTM D5185m >10 0 <1	0
Nickel ppm ASTM D5185m >3 0 <1	0
Titanium ppm ASTM D5185m >3 0 <1	0
Silver ppm ASTM D5185m >2 0 0	0
Aluminum ppm ASTM D5185m >10 0 0	<1
Lead ppm ASTM D5185m >10 0 <1	0
Copper ppm ASTM D5185m >50 3 2	12
Tin ppm ASTM D5185m >10 0 <1	0
Antimony ppm ASTM D5185m	
	0
i i i i i i i i i i i i i i i i i i i	0
ADDITIVES method limit/base current history	/1 history2
<b>Boron</b> ppm ASTM D5185m <b>0</b> 0	0
Barium ppm ASTM D5185m 90 0 0	0
Molybdenum ppm ASTM D5185m 0 0	0
Manganese ppm ASTM D5185m 1 2	0
Magnesium ppm ASTM D5185m 90 38 64	0
Calcium ppm ASTM D5185m 2 0 <1	0
Phosphorus ppm ASTM D5185m 0 1	3
Zinc ppm ASTM D5185m 21 19	4
CONTAMINANTS method limit/base current history	/1 history2
Silicon ppm ASTM D5185m >25 <1 <1	1
Sodium ppm ASTM D5185m 18 19	<1
Potassium ppm ASTM D5185m >20 3 6	0
Water % ASTM D6304 >0.05 0.017 0.022	0.006
ppm Water ppm ASTM D6304 >500 177.0 223.0	61.3
	/1 history2
FLUID CLEANLINESS method limit/base current history	
FLUID CLEANLINESS method limit/base current history   Particles >4μm ASTM D7647 1678 17507	
Particles >4μm ASTM D7647 1678 17507   Particles >6μm ASTM D7647 >1300 300 ▲ 4459	
Particles >4μm ASTM D7647 1678 17507   Particles >6μm ASTM D7647 >1300 300 ▲ 4459	
Particles >4μm ASTM D7647 1678 17507   Particles >6μm ASTM D7647 >1300 300 4459   Particles >14μm ASTM D7647 >80 10 193	
Particles >4μm ASTM D7647 1678 17507   Particles >6μm ASTM D7647 >1300 300 ▲ 4459   Particles >14μm ASTM D7647 >80 10 ▲ 193   Particles >21μm ASTM D7647 >20 2 ▲ 39   Particles >38μm ASTM D7647 >4 0 2	
Particles >4μm ASTM D7647 1678 17507   Particles >6μm ASTM D7647 >1300 300 4459   Particles >14μm ASTM D7647 >80 10 193   Particles >21μm ASTM D7647 >20 2 39   Particles >38μm ASTM D7647 >4 0 2	   
Particles >4μm ASTM D7647 1678 17507   Particles >6μm ASTM D7647 >1300 300 ▲ 4459   Particles >14μm ASTM D7647 >80 10 ▲ 193   Particles >14μm ASTM D7647 >20 2 ▲ 39   Particles >21μm ASTM D7647 >4 0 2   Particles >38μm ASTM D7647 >3 0 0	5



# **OIL ANALYSIS REPORT**






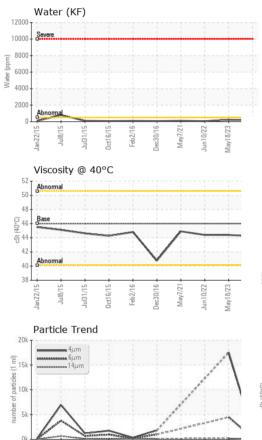

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.2	44.4	44.4
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color						
Detterre						

Bottom

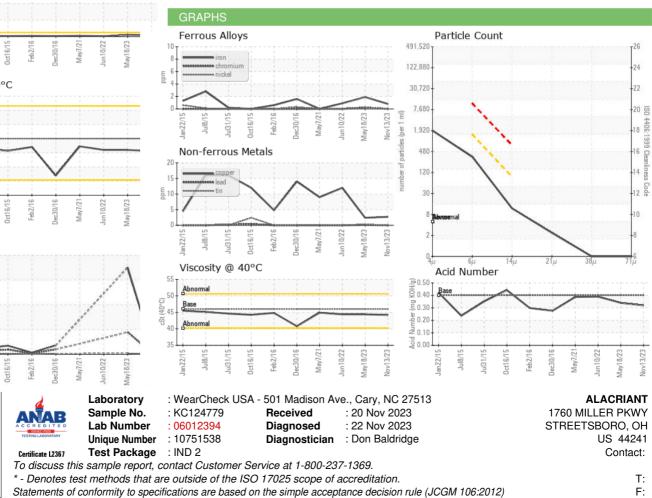

Contact/Location: ? ? - ALASTR