


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



6840714 (S/N 1278)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Septiosz Septiosz Newtosz Jandosz Markosz Markosz Augtosz Octobas Newtosz						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA010901	KCPA007448	KCPA002246
Sample Date		Client Info		16 Nov 2023	27 Oct 2023	29 Aug 2023
Machine Age	hrs	Client Info		0	6671	6209
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	10	6	7
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	<1	<1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	0	3	<1
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		164	154	210
Zinc	ppm	ASTM D5185m		0	4	0
Sulfur	ppm	ASTM D5185m		1312	1744	2186
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		3	0	3
Potassium	ppm	ASTM D5185m	>20	0	3	1
Water	%	ASTM D6304	>0.05	0.004	0.006	0.003
ppm Water	ppm	ASTM D6304	>500	40.5	67.6	30.6
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		374	5481	1192
Particles >6µm		ASTM D7647	>1300	97	1 966	206
Particles >14μm		ASTM D7647	>80	6	<u>224</u>	9
Particles >21µm		ASTM D7647	>20	1	△ 66	2
Particles >38µm		ASTM D7647	>4	0	3	0
Particles >71µm		ASTM D7647	>3	0	1	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	16/14/10	2 0/18/15	17/15/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.46	0.353	0.42



OIL ANALYSIS REPORT

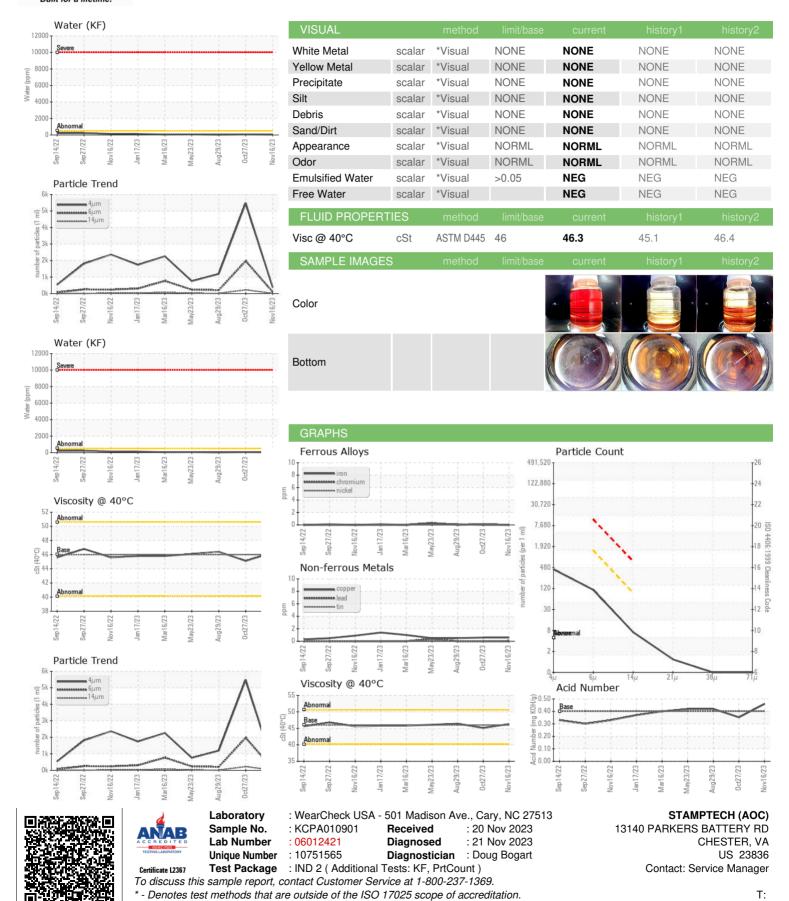

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: