


# **PROBLEM SUMMARY**

### Area COMAIR PLUS 5 Machine Id QUINCY 87987 - HAWKEYE AUTO BODY Component

Compressor

## COMPONENT CONDITION SUMMARY

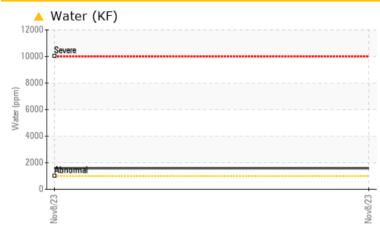

### RECOMMENDATION

We advise that you follow the water drain-off procedure for this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status				ABNORMAL			
Water	%	ASTM D6304	>0.1	<b>A</b> 0.158			
ppm Water	ppm	ASTM D6304	>1000	<b>A</b> 1580			
Emulsified Water	scalar	*Visual	>0.1	<b>6.2%</b>			

Customer Id: UCATLSAL Sample No.: UCH06012555 Lab Number: 06012555 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>



RECOMMENDED ACTIONS							
Action	Status	Date	Done By	Description			
Water Drain-off			?	We advise that you follow the water drain-off procedure for this component.			

HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

### Area COMAIR PLUS 5 Machine Id QUINCY 87987 - HAWKEYE AUTO BODY Component

Compressor

# DIAGNOSIS

Recommendation

We advise that you follow the water drain-off procedure for this component. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

There is a light concentration of water present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid.


				Nov2023		
SAMPLE INFORM		method	limit/base	current	history1	history2
Sample Number		Client Info		UCH06012555		
Sample Date		Client Info		08 Nov 2023		
Machine Age	hrs	Client Info		47125		
Oil Age	hrs	Client Info		3586		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m		2		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		ء <1		
Aluminum	ppm	ASTM D5185m	>25	<1		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm		>50	<1		
Tin	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m	>10	<1		
Cadmium		ASTM D5185m		0		
	ppm			-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m		2		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		11		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	3		
Water	%	ASTM D6304	>0.1	<b>A</b> 0.158		
ppm Water	ppm	ASTM D6304	>1000	<b>1</b> 580		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.24		


Sample Rating Trend


WATER



# **OIL ANALYSIS REPORT**

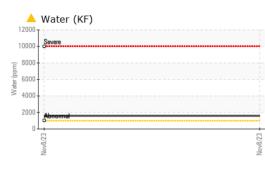

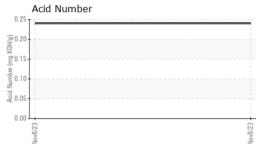

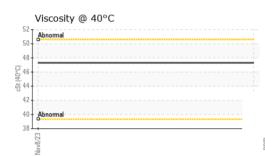

	VISUAL		method	limit/base	current	history1	history2
_	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
	Precipitate	scalar	*Visual	NONE	NONE		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
·····	Sand/Dirt	scalar	*Visual	NONE	NONE		
Nov8/23	Appearance	scalar	*Visual	NORML	NORML		
Ñ	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.1	<b>6.2%</b>		
	Free Water	scalar	*Visual		NEG		
	FLUID PROPERT	FIES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445		47.3		
	SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Nav8/23	Color				A-	no image	no image
	Bottom					no image	no image
	GRAPHS						
	Ferrous Alloys						
				Nov8/23			
	Non-ferrous Metal	ls					
	Viscosity @ 40°C			Nov8/23	Acid Number		
	Abnormal			\$ <sup>0.25</sup>			
ā	50+			ý 0.20	) +		
	25 01 45 -			(b) 1.9 (b) 1.9 (c) 1.	1		
	40 - Abnormal						
	35				) <del></del>		
	Nav8/23			Nov8/23	Nav8/23		200
Laboratory Sample No. Lab Number Unique Number	: 06012555	501 Madis Received Diagnose Diagnosti	: 20 I d : 22 I		3	ATLANTIC CO SALEM INDU	MPRESSOR

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: BILL RIMER - UCATLSAL

F: (757)216-0134