

## **OIL ANALYSIS REPORT**

#### Sample Rating Trend

### NORMAL

### WP11 CT04 (S/N 850042747.02.01.001) Component

#### Gearbox

Fluic SHELL OMALA 220 (5 GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

																																			1
																																			L
																																			L
																																			÷
																																			н
																																			н
																																			J.
																																			L
																																			L
																																			L
																																			1
																																			ł.
																																			L
																																			ł.
																																			L
																																			L
																																			J.
																																			н
																																			н
																																			н
																																			1
jananj <b>a</b> na najemenja na jenenjemenjemenjemenjemenjemenjemenjeme					۰.																														T
																																			T
					÷.,																														ł
******									1																										Т
	۰.	۰.	۰.	۰.	61	٠	÷				۰.	۰.	ė	÷					۰.	۰.	ė.	۰.	ė.				÷.		1						
					 		٠	u	L	л	н		U		L	ц	н	н					U	U	L	L	L	L	L	н	н	л	л	н	





#### 2008 Oct2009 Feb2011 Jun2017 Mar2018 Dec2019 Oct2021 Inc 2022

SAMPLE INFORM	ΛΑΤΙΟΝ	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0776143	WC0630953	WC0630964
Sample Date		Client Info		01 Nov 2023	30 Jul 2023	05 Jun 2023
Machine Age	yrs	Client Info		20	20	20
Oil Age	yrs	Client Info		1	0	1
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	8	13	8
Chromium	ppm	ASTM D5185m	>15	0	0	<1
Nickel	ppm	ASTM D5185m	>15	0	0	1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	<1
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	0	<1	0
Tin	ppm	ASTM D5185m	>25	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	4.4	0	<1	0
Barium	ppm	ASTM D5185m	0.0	0	2	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	<1
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	0	1	<1	<1
Calcium	ppm	ASTM D5185m	0	2	<1	2
Phosphorus	ppm	ASTM D5185m	215	308	300	312
Zinc	ppm	ASTM D5185m	0	3	10	2
Sulfur	ppm	ASTM D5185m	7039	13294	13557	15758
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<1	3	<1
Sodium	ppm	ASTM D5185m		<1	0	<1
Potassium	ppm	ASTM D5185m	>20	1	<1	2
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.44	0.49	0.49




# **OIL ANALYSIS REPORT**



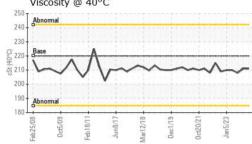

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
			12 22 11		1 C	
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	IES cSt	ASTM D445	limit/base	211	history1 211	history2 208
	cSt					
Visc @ 40°C	cSt	ASTM D445	220	211	211	208

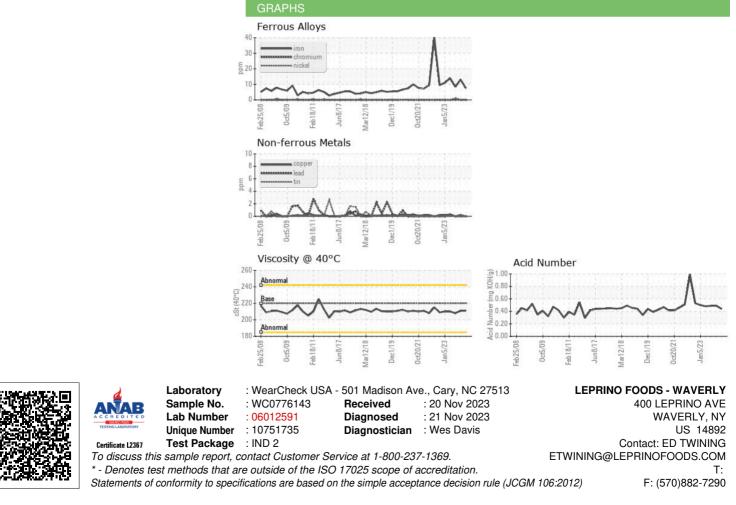

Contact/Location: ED TWINING - LEPWAV