




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

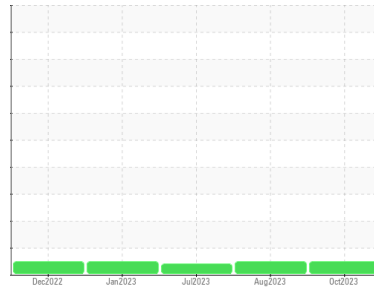

Machine Id  
**ENDEAVOR (S/N 2WB11168)**

Component  
**Starboard Main Engine**

Fluid  
**CHEVRON 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0847412</b>	WC0834549	WC0834566
Sample Date	Client Info			<b>21 Oct 2023</b>	14 Aug 2023	06 Jul 2023
Machine Age	hrs	Client Info		<b>16254</b>	15682	13761
Oil Age	hrs	Client Info		<b>94</b>	300	200
Oil Changed	Client Info			<b>Not Changed</b>	N/A	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.1		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	<b>2</b>	13	6
Chromium	ppm	ASTM D5185m	>8	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>2</b>	2	1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>15	<b>1</b>	<1	1
Lead	ppm	ASTM D5185m	>18	<b>0</b>	1	<1
Copper	ppm	ASTM D5185m	>80	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>14	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>68</b>	285	342
Barium	ppm	ASTM D5185m		<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m		<b>19</b>	81	81
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>167</b>	485	381
Calcium	ppm	ASTM D5185m		<b>2119</b>	1778	1664
Phosphorus	ppm	ASTM D5185m		<b>974</b>	1134	1056
Zinc	ppm	ASTM D5185m		<b>1183</b>	1450	1233
Sulfur	ppm	ASTM D5185m		<b>3851</b>	4293	3498





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>6</b>	5	3
Sodium	ppm	ASTM D5185m	>50	<b>&lt;1</b>	2	0
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	3	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.3</b>	8.4	6.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.1</b>	21.8	20.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>11.3</b>	18.5	15.9
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.6</b>	8.58	9.19







# OIL ANALYSIS REPORT

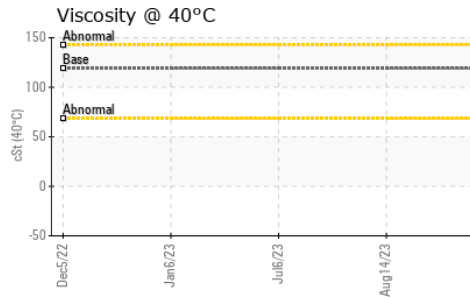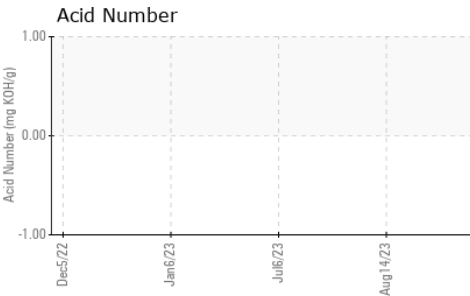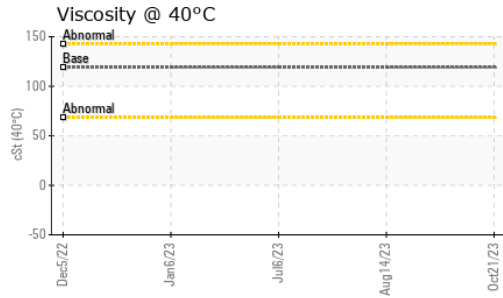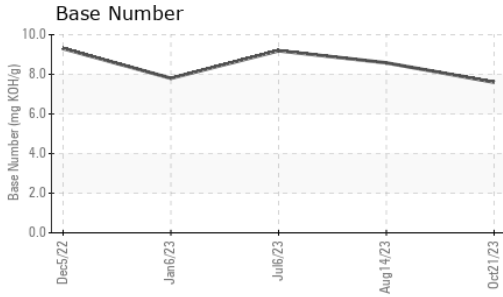

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.13</b>	13.9	▲ 13.57

## GRAPHS

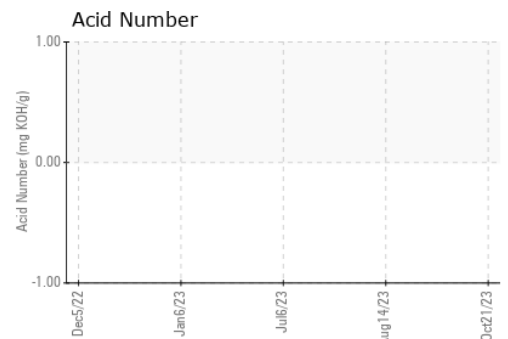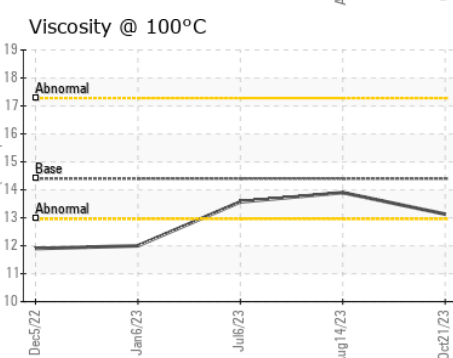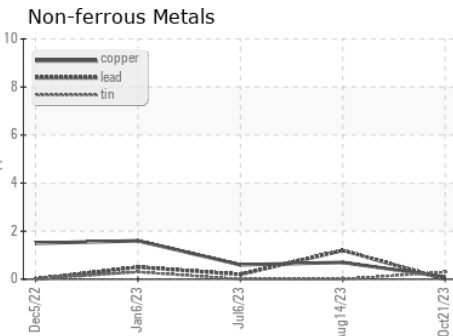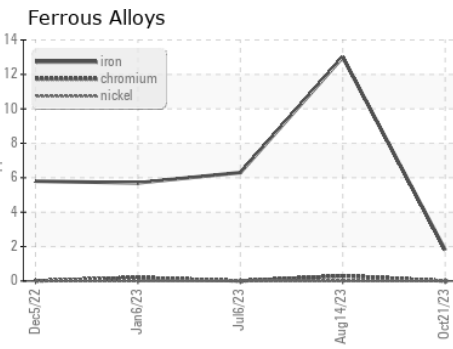

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0847412 **Received** : 20 Nov 2023  
**Lab Number** : 06012602 **Diagnosed** : 29 Nov 2023  
**Unique Number** : 10751746 **Diagnostician** : Jonathan Hester  
**Test Package** : MAR 2 ( Additional Tests: KV40 )

**CITY EXPERIENCES - SEAWARD EXPLORER**  
 2825 5TH AVENUE  
 SAN DIEGO, CA  
 US 92103  
 Contact: PETER CHARBONNET

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (985)290-6777

F: