




FUEL REPORT

Sample Rating Trend

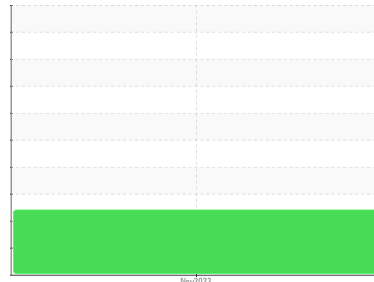

ISO



Machine Id
KIOTI NX6010 VL6000086

Component
Diesel Fuel

Fluid
OFF ROAD DIESEL FUEL (--- GAL)

DIAGNOSIS

Recommendation

We advise that you filter this fluid before use. All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

There is a high amount of particulates present in the fuel. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The water content is negligible.

Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur value derived by ASTM D5453 method for ULSD validation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KT0000885	---	---
Sample Date	Client Info			10 Nov 2023	---	---
Machine Age	hrs	Client Info		294	---	---
Sample Status				ATTENTION	---	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298		0.831	---	---
Fuel Color	text	*Visual Screen		Red	---	---
ASTM Color	scalar	*ASTM D1500		L4.0	---	---
Visc @ 40°C	cSt	ASTM D445		2.3	---	---
Pensky-Martens Flash Point	°C	*PMCC Calculated		57	---	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m		0	---	---
Sulfur (UVF)	ppm	ASTM D5453		8	---	---






DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86		160	---	---
5% Distillation Point	°C	ASTM D86		184	---	---
10% Distill Point	°C	ASTM D86		195	---	---
15% Distillation Point	°C	ASTM D86		203	---	---
20% Distill Point	°C	ASTM D86		211	---	---
30% Distill Point	°C	ASTM D86		225	---	---
40% Distill Point	°C	ASTM D86		240	---	---
50% Distill Point	°C	ASTM D86		255	---	---
60% Distill Point	°C	ASTM D86		269	---	---
70% Distill Point	°C	ASTM D86		285	---	---
80% Distill Point	°C	ASTM D86		303	---	---
85% Distillation Point	°C	ASTM D86		314	---	---
90% Distill Point	°C	ASTM D86		327	---	---
95% Distillation Point	°C	ASTM D86		346	---	---
Final Boiling Point	°C	ASTM D86		357	---	---
Distillation Residue	%	ASTM D86		1.4	---	---
Distillation Loss	%	ASTM D86		0.3	---	---

IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D7777		38.8	---	---
Cetane Index		ASTM D4737	<40.0	50.6	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	0	---	---
Sodium	ppm	ASTM D5185m	<0.1	0	---	---
Potassium	ppm	ASTM D5185m	<0.1	<1	---	---
Water	%	ASTM D6304	<0.05	0.003	---	---
ppm Water	ppm	ASTM D6304	<500	27.4	---	---
% Gasoline	%	*In-House	<0.50	0.0	---	---
% Biodiesel	%	*In-House	<20.0	0.0	---	---



FUEL REPORT

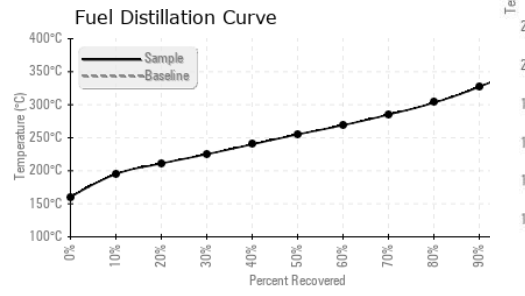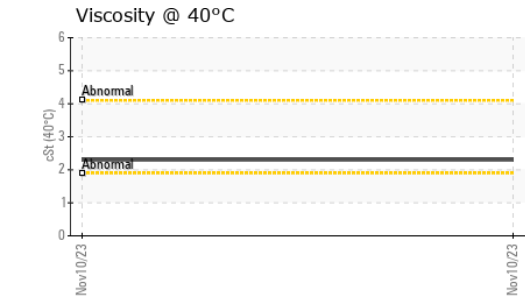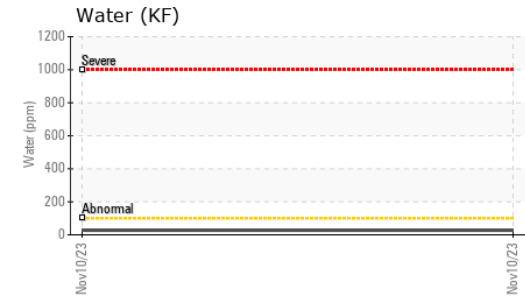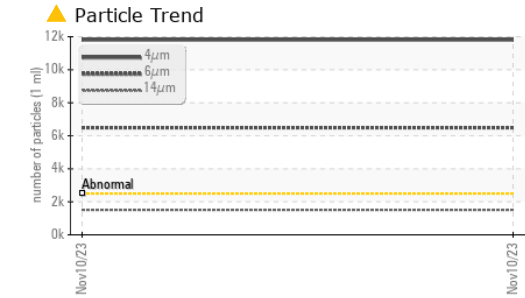
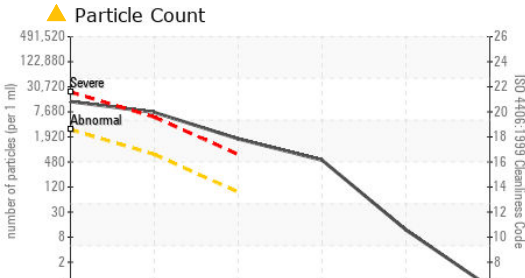


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	▲ 11810	---	---
Particles >6µm	ASTM D7647	>640	▲ 6489	---	---
Particles >14µm	ASTM D7647	>80	▲ 1508	---	---
Particles >21µm	ASTM D7647	>20	▲ 467	---	---
Particles >38µm	ASTM D7647	>4	▲ 10	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	▲ 21/20/18	---	---

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m <0.1	2	---	---
Nickel	ppm	ASTM D5185m <0.1	<1	---	---
Lead	ppm	ASTM D5185m <0.1	<1	---	---
Vanadium	ppm	ASTM D5185m <0.1	0	---	---
Iron	ppm	ASTM D5185m <0.1	0	---	---
Calcium	ppm	ASTM D5185m <0.1	<1	---	---
Magnesium	ppm	ASTM D5185m <0.1	<1	---	---
Phosphorus	ppm	ASTM D5185m <0.1	0	---	---
Zinc	ppm	ASTM D5185m <0.1	0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

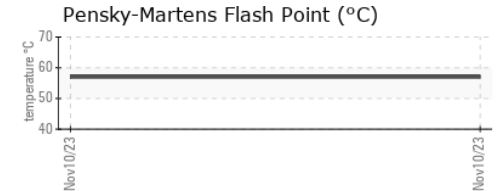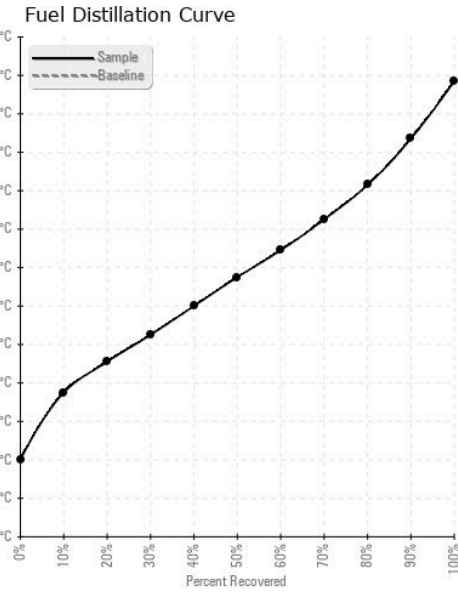

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KT0000885 **Received** : 20 Nov 2023
Lab Number : **06012897** **Diagnosed** : 07 Dec 2023
Unique Number : 10752041 **Diagnostician** : Doug Bogart
Test Package : DF-2 (Additional Tests: Screen)

SHERWOOD WHOLESALE
 3110 LITTLE ROCK RD
 ROSE BUD, AR
 US 72137
 Contact: Service Manager

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)