




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

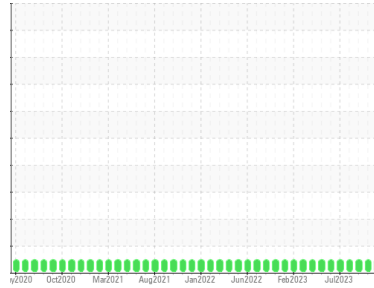

Area
OKLAHOMA
 Machine Id
PETERBILT 8466
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0838592	WC0838594	WC0838588
Sample Date	Client Info			03 Nov 2023	05 Oct 2023	12 Sep 2023
Machine Age	hrs	Client Info		7984	7894	7811
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	50	51	54
Chromium	ppm	ASTM D5185m	>4	2	2	2
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>25	7	8	5
Lead	ppm	ASTM D5185m	>45	7	8	8
Copper	ppm	ASTM D5185m	>85	15	15	17
Tin	ppm	ASTM D5185m	>4	2	2	2
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		27	34	38
Barium	ppm	ASTM D5185m		0	12	0
Molybdenum	ppm	ASTM D5185m		28	30	31
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m		692	681	775
Calcium	ppm	ASTM D5185m		1463	1390	1519
Phosphorus	ppm	ASTM D5185m		1006	1021	1084
Zinc	ppm	ASTM D5185m		1354	1312	1428
Sulfur	ppm	ASTM D5185m		2692	2696	3392




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	9	9	10
Sodium	ppm	ASTM D5185m		7	8	9
Potassium	ppm	ASTM D5185m	>20	12	14	12

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.5	1.4	1.4
Nitration	Abs/cm	*ASTM D7624	>20	12.5	12.0	12.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.4	27.4	27.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.7	22.8	22.2
Base Number (BN)	mg KOH/g	ASTM D2896		6.8	5.9	6.4







OIL ANALYSIS REPORT

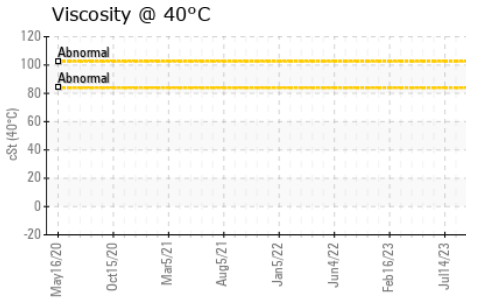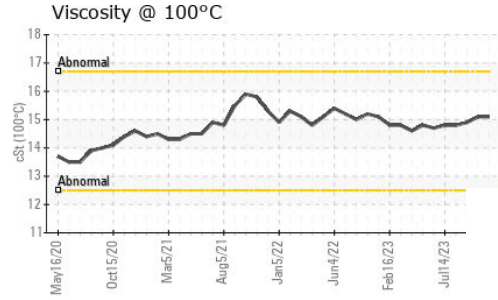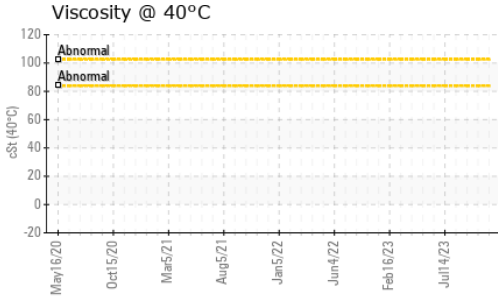

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	15.1	14.9

GRAPHS

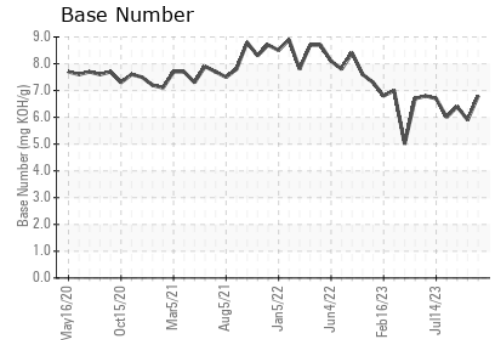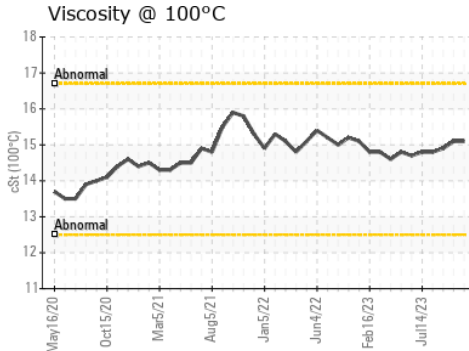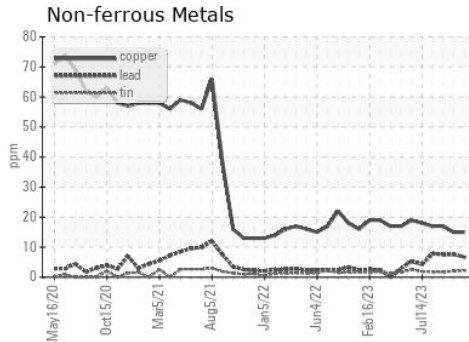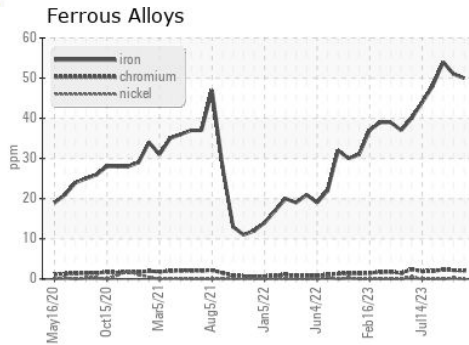

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0838592 Received : 20 Nov 2023
 Lab Number : 06012919 Diagnosed : 22 Nov 2023
 Unique Number : 10752063 Diagnostician : Jonathan Hester
 Test Package : FLEET (Additional Tests: KV40)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LIBERTY DISPOSAL
 6401 S EASTERN AVE
 OKLAHOMA CITY, OK
 US 73149
 Contact: RICK SCHMIDT
 r.schmidt@ldi89.com

T:
F: