

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

INTERNATIONAL 5919715

Diesel Engine Fluid VALVOLINE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear


All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.




SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		IL0033238	IL05952592	IL05852996
Sample Date		Client Info		14 Nov 2023	16 Aug 2023	10 May 2023
Machine Age	mls	Client Info		307759	297327	286286
Oil Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	MARGINAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method	>0.2	NEG	NEG	NEG
		WC Welliou		NEG	NLG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	11	14	21
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	<1	🔺 15
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	<1	<1	0
Tin	ppm	ASTM D5185m	>15	<1	0	1
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base 39	current 45	history1 199	history2 51
	ppm ppm					
Boron		ASTM D5185m	39	45	199	51
Boron Barium	ppm	ASTM D5185m ASTM D5185m	39 1	45 0	199 0	51 0
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	39 1 49	45 0 71	199 0 85	51 0 63
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	39 1 49 1	45 0 71 <1	199 0 85 <1	51 0 63 <1
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	39 1 49 1 616	45 0 71 <1 691	199 0 85 <1 544	51 0 63 <1 786
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	39 1 49 1 616 1554	45 0 71 <1 691 1250	199 0 85 <1 544 1510	51 0 63 <1 786 1323
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	39 1 49 1 616 1554 899	45 0 71 <1 691 1250 712	199 0 85 <1 544 1510 993	51 0 63 <1 786 1323 808
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	39 1 49 1 616 1554 899 1069	45 0 71 <1 691 1250 712 927	199 0 85 <1 544 1510 993 1262	51 0 63 <1 786 1323 808 1056
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	39 1 49 1 616 1554 899 1069 2624 <i>limit/base</i>	45 0 71 <1 691 1250 712 927 2293	199 0 85 <1 544 1510 993 1262 3713	51 0 63 <1 786 1323 808 1056 3162
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	39 1 49 1 616 1554 899 1069 2624 <i>limit/base</i>	45 0 71 <1 691 1250 712 927 2293 current	199 0 85 <1 544 1510 993 1262 3713 history1	51 0 63 <1 786 1323 808 1056 3162 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	39 1 49 1 616 1554 899 1069 2624 <i>limit/base</i> >25	45 0 71 <1 691 1250 712 927 2293 current 4	199 0 85 <1 544 1510 993 1262 3713 history1 5	51 0 63 <1 786 1323 808 1056 3162 history2 6
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	39 1 49 1 616 1554 899 1069 2624 <i>limit/base</i> >25	45 0 71 <1 691 1250 712 927 2293 current 4 2	199 0 85 <1 544 1510 993 1262 3713 history1 5 2	51 0 63 <1 786 1323 808 1056 3162 history2 6 3
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	39 1 49 1 616 1554 899 1069 2624 limit/base >25	45 0 71 <1 691 1250 712 927 2293 current 4 2 2 <1	199 0 85 <1 544 1510 993 1262 3713 history1 5 2 3	51 0 63 <1 786 1323 808 1056 3162 history2 6 3 2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	39 1 49 1 616 1554 899 1069 2624 limit/base >25 >20 >5	45 0 71 <1 691 1250 712 927 2293 current 4 2 2 <1 1.0	199 0 85 <1 544 1510 993 1262 3713 history1 5 2 3 3 <1.0	51 0 63 <1 786 1323 808 1056 3162 history2 6 3 2 2 <1.0
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	39 1 49 1 616 1554 899 1069 2624 2624 2624 >25 >20 >20 >5	45 0 71 <1 691 1250 712 927 2293 <i>current</i> 4 2 2 <1 1.0 <i>current</i> 0.3	199 0 85 <1 544 1510 993 1262 3713 history1 5 2 3 3 <1.0 history1 0.4	51 0 63 <1 786 1323 808 1056 3162 history2 6 3 2 <1.0 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	39 1 49 1 616 1554 899 1069 2624 <i>limit/base</i> >25 >20 >5 <i>limit/base</i> >3	45 0 71 <1 691 1250 712 927 2293 current 4 2 2 <1 1.0 current	199 0 85 <1 544 1510 993 1262 3713 history1 5 2 3 3 <1.0 history1	51 0 63 <1 786 1323 808 1056 3162 history2 6 3 2 <1.0 history2 0.8
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D3524 ASTM D3524 method *ASTM D7844	39 1 49 1 616 1554 899 1069 2624 ////////////////////////////////////	45 0 71 <1 691 1250 712 927 2293 current 4 2 2 <1 1.0 current 0.3 9.7	199 0 85 <1 544 1510 993 1262 3713 history1 5 2 3 <1.0 history1 0.4 9.5	51 0 63 <1 786 1323 808 1056 3162 history2 6 3 2 <1.0 history2 0.8 11.8
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Solicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	39 1 49 1 616 1554 899 1069 2624 imit/base >25 imit/base >3 >20 >30 imit/base	45 0 71 <1 691 1250 712 927 2293 <i>current</i> 4 2 2 <1 1.0 <i>current</i> 0.3 9.7 20.1	199 0 85 <1 544 1510 993 1262 3713 history1 5 2 3 3 <1.0 history1 0.4 9.5 22.7 history1	51 0 63 <1 786 1323 808 1056 3162 history2 6 3 2 <1.0 history2 0.8 11.8 23.4 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	39 1 49 1 616 1554 899 1069 2624 limit/base >25 limit/base >3 >20 >3 >20 >3	45 0 71 <1 691 1250 712 927 2293 <i>current</i> 4 2 <1 1.0 <i>current</i> 0.3 9.7 20.1	199 0 85 <1 544 1510 993 1262 3713 history1 5 2 3 <1.0 history1 0.4 9.5 22.7	51 0 63 <1 786 1323 808 1056 3162 history2 6 3 2 <1.0 history2 0.8 11.8 23.4




OIL ANALYSIS REPORT





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.6	12.4	13.3	13.3
GRAPHS						

Ferrous Alloys

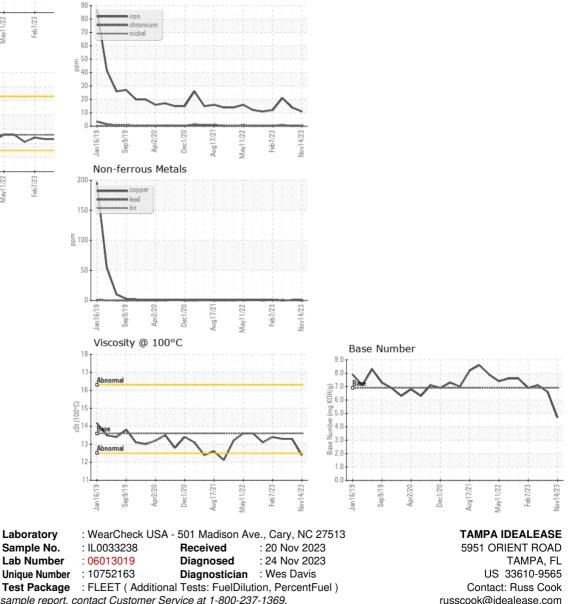

Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) russcook@idealease.com T: (813)626-9285 F: (844)270-1356