

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

DICK LAVY DICK LAVY 4965

Component Front Differential Fluid NOT GIVEN (--- GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0843136		
Sample Date		Client Info		04 Oct 2023		
Machine Age	mls	Client Info		479		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	7		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m		0		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		162		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		17		
Phosphorus	ppm	ASTM D5185m		1064		
Zinc	ppm	ASTM D5185m		13		
Sulfur	ppm	ASTM D5185m		23770		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	8		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>.2	0.049		
ppm Water	ppm	ASTM D6304	>2000	491.7		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	4 91744		
Particles >6µm		ASTM D7647	>5000	<u> </u>		
Particles >14µm		ASTM D7647	>640	223		
Particles >21µm		ASTM D7647	>160	20		
Particles >38µm		ASTM D7647	>40	4		
Particles >71µm		ASTM D7647	>10	4		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	A 24/22/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		3.35		



OIL ANALYSIS REPORT

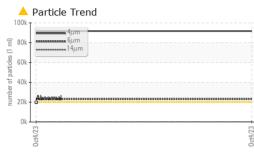

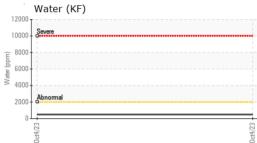

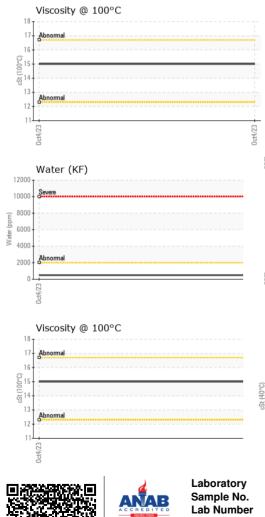

VISUAL		method	limit/base	current	history1	history
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>.2	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history
Visc @ 40°C	cSt	ASTM D445		99.8		
Visc @ 100°C	cSt	ASTM D445		15.0		
Viscosity Index (VI)	Scale	ASTM D2270		157		
SAMPLE IMAGES	S	method	limit/base	current	history1	history
	-				,	
Color				a 0	no image	no imag
				Trans D H	no mago	no imagi
Bottom					no image	no image
GRAPHS						
Ferrous Alloys			491,520	Particle Count		
8 iron				Severe		
6 - nickel			122,880			
2			30,720	Abnormal		
	*****	******			•	
0ct4/23			1000 100 1000 1			
			cles (b		•	
Non-ferrous Metal	s		otted 480			
8- copper			in 120	+		
6 - tin			E 30			
4						
2			8	†		
0ct4/23			0ct4/23	-		
00			5 0 0			
Viscosity @ 40°C			2	ونام الم Acid Number	14μ 21μ	38µ 7
Abnormal			爭4.0 對			
20 - Abnormal 00 - Abnormal			(b) 4.0 (b) 4.0 Bu 3.0 bu 92.0 Numper 1.0 Void 10 Void			
- 00			ja 2.0	+		
30 - Abnormal						
50				T i		

Oct4/23 -

Oct4/23 -



0ct4/23 -

0ct4/23