




OIL ANALYSIS REPORT

Sample Rating Trend

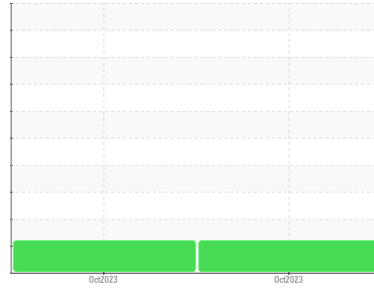

ISO



Area
DICK LAVY
 Machine Id
DICK LAVY 4965
 Component
Front Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0843137	WC0843136	---
Sample Date	Client Info		04 Oct 2023	04 Oct 2023	---
Machine Age	mls	Client Info	479	479	---
Oil Age	mls	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ATTENTION	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>500	0	7	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>25	0	0	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>100	0	0	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	400	267	162	---
Barium	ppm	ASTM D5185m	200	0	<1	---
Molybdenum	ppm	ASTM D5185m	12	0	0	---
Manganese	ppm	ASTM D5185m		0	1	---
Magnesium	ppm	ASTM D5185m	12	0	<1	---
Calcium	ppm	ASTM D5185m	150	1	17	---
Phosphorus	ppm	ASTM D5185m	1650	1436	1064	---
Zinc	ppm	ASTM D5185m	125	0	13	---
Sulfur	ppm	ASTM D5185m	22500	24277	23770	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>75	<1	8	---
Sodium	ppm	ASTM D5185m		0	1	---
Potassium	ppm	ASTM D5185m	>20	0	<1	---
Water	%	ASTM D6304	>.2	0.035	0.049	---
ppm Water	ppm	ASTM D6304	>2000	359.6	491.7	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 26037	▲ 91744	---
Particles >6µm	ASTM D7647	>5000	▲ 6260	▲ 23131	---
Particles >14µm	ASTM D7647	>640	271	223	---
Particles >21µm	ASTM D7647	>160	71	20	---
Particles >38µm	ASTM D7647	>40	4	4	---
Particles >71µm	ASTM D7647	>10	1	4	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 22/20/15	▲ 24/22/15	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	2.00	2.28	3.35	---

OIL ANALYSIS REPORT

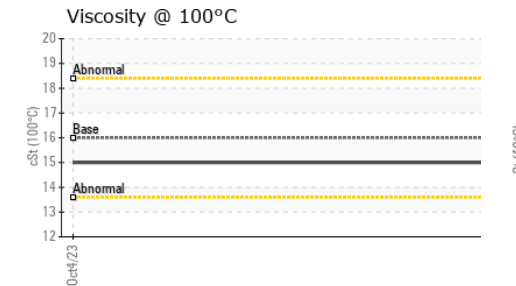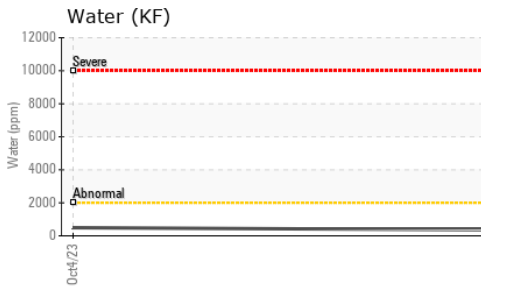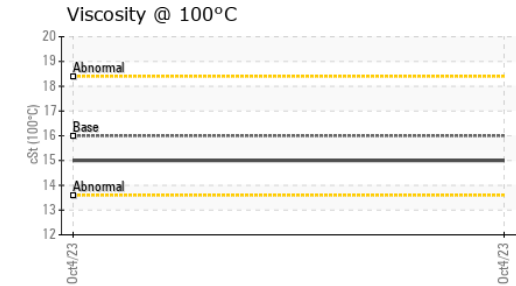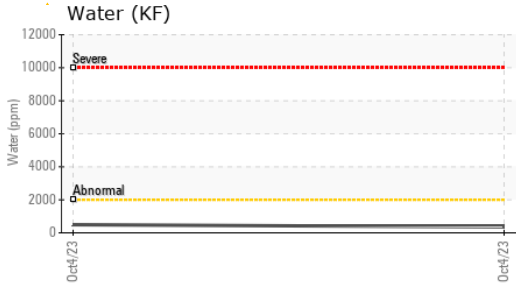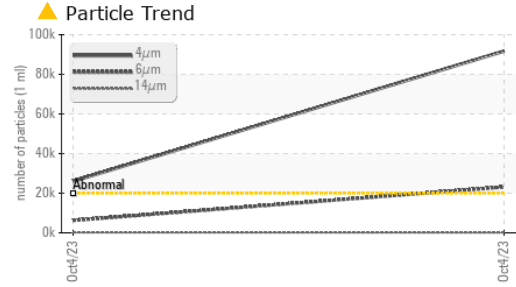






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	109	99.8	---
Visc @ 100°C	cSt	ASTM D445	16.0	15.0	---
Viscosity Index (VI)	Scale	ASTM D2270	157	157	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					



GRAPHS

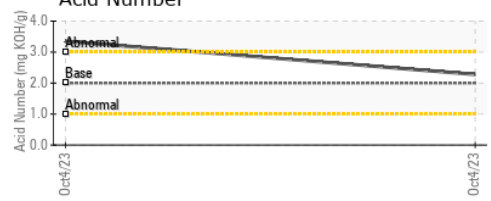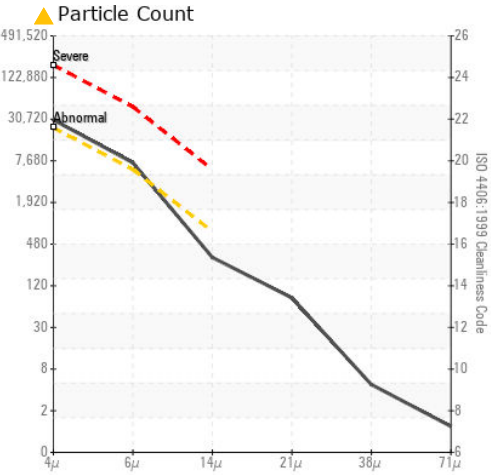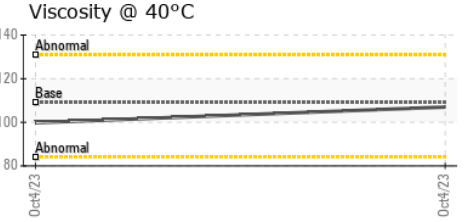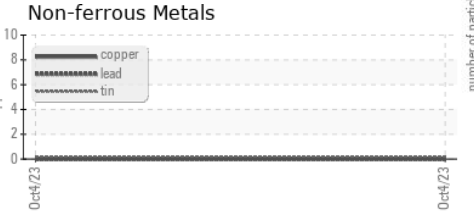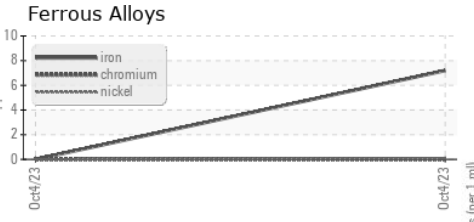

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0843137 **Received** : 20 Nov 2023
Lab Number : 06013270 **Diagnosed** : 22 Nov 2023
Unique Number : 10752414 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)