




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

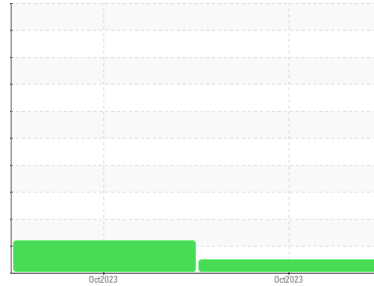

Area  
**DICK LAVY [AFTER]**  
 Machine Id  
**DICK LAVY 4967**  
 Component  
**Front Differential**  
 Fluid  
**GEAR OIL SAE 75W90 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0853961</b>	WC0853960	---
Sample Date	Client Info	<b>12 Oct 2023</b>	11 Oct 2023	---
Machine Age	mls Client Info	<b>567</b>	567	---
Oil Age	mls Client Info	<b>0</b>	0	---
Oil Changed	Client Info	<b>N/A</b>	N/A	---
Sample Status		<b>NORMAL</b>	ABNORMAL	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >500	<b>0</b>	20	---
Chromium ppm	ASTM D5185m >10	<b>0</b>	<1	---
Nickel ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	---
Titanium ppm	ASTM D5185m	<b>0</b>	0	---
Silver ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum ppm	ASTM D5185m >25	<b>&lt;1</b>	<1	---
Lead ppm	ASTM D5185m >25	<b>0</b>	0	---
Copper ppm	ASTM D5185m >100	<b>0</b>	0	---
Tin ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	---
Vanadium ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m 400	<b>273</b>	161	---
Barium ppm	ASTM D5185m 200	<b>0</b>	1	---
Molybdenum ppm	ASTM D5185m 12	<b>0</b>	0	---
Manganese ppm	ASTM D5185m	<b>0</b>	6	---
Magnesium ppm	ASTM D5185m 12	<b>&lt;1</b>	<1	---
Calcium ppm	ASTM D5185m 150	<b>1</b>	18	---
Phosphorus ppm	ASTM D5185m 1650	<b>1469</b>	1077	---
Zinc ppm	ASTM D5185m 125	<b>0</b>	11	---
Sulfur ppm	ASTM D5185m 22500	<b>25432</b>	24499	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >75	<b>&lt;1</b>	14	---
Sodium ppm	ASTM D5185m	<b>0</b>	1	---
Potassium ppm	ASTM D5185m >20	<b>0</b>	<1	---
Water %	ASTM D6304 >.2	<b>0.043</b>	0.037	---
ppm Water ppm	ASTM D6304 >2000	<b>431.2</b>	371.9	---

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >20000	<b>12996</b>	▲ 114134	---
Particles >6µm	ASTM D7647 >5000	<b>1999</b>	▲ 31294	---
Particles >14µm	ASTM D7647 >640	<b>34</b>	188	---
Particles >21µm	ASTM D7647 >160	<b>6</b>	10	---
Particles >38µm	ASTM D7647 >40	<b>2</b>	3	---
Particles >71µm	ASTM D7647 >10	<b>1</b>	2	---
Oil Cleanliness	ISO 4406 (c) >21/19/16	<b>21/18/12</b>	▲ 24/22/15	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 2.00	<b>2.27</b>	3.29	---




# OIL ANALYSIS REPORT

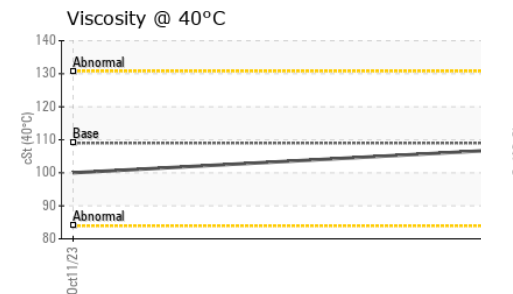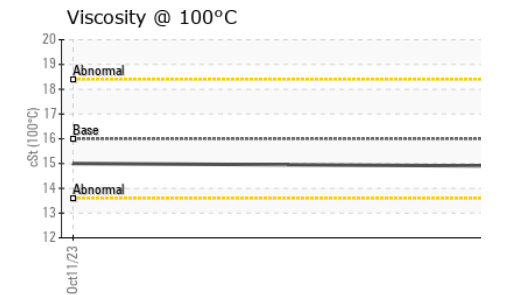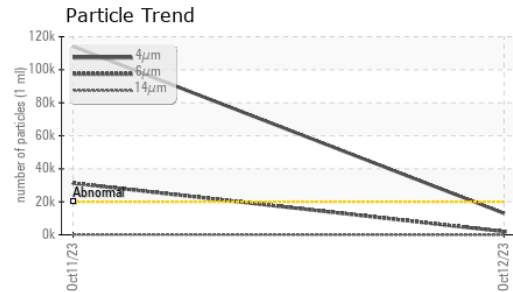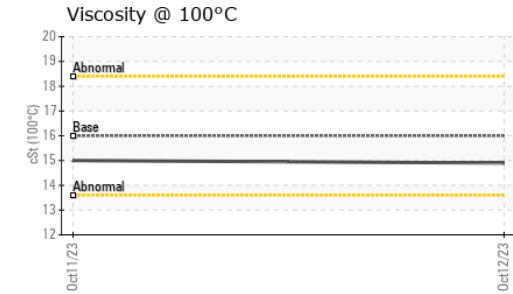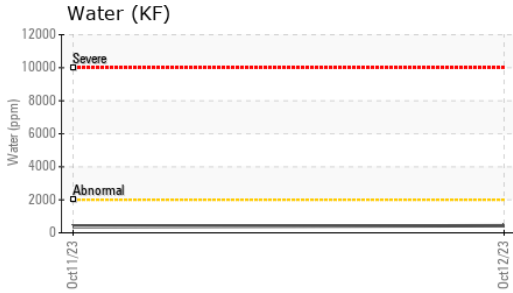





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	109	107	100
Visc @ 100°C	cSt	ASTM D445	16.0	14.9	15.0
Viscosity Index (VI)	Scale	ASTM D2270	157	144	157

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

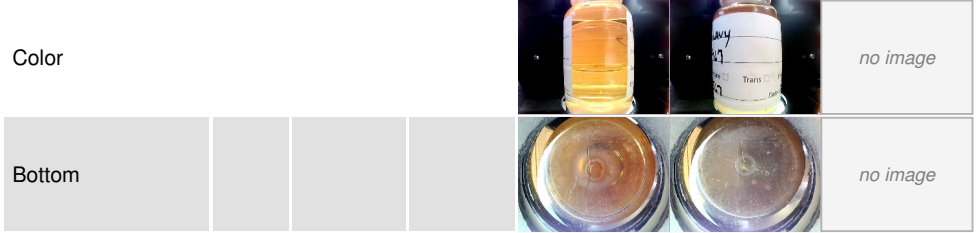

## GRAPHS

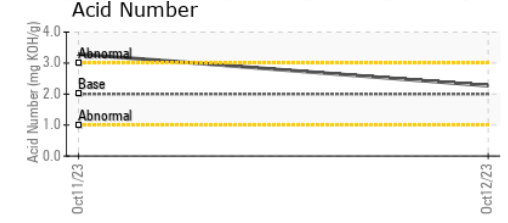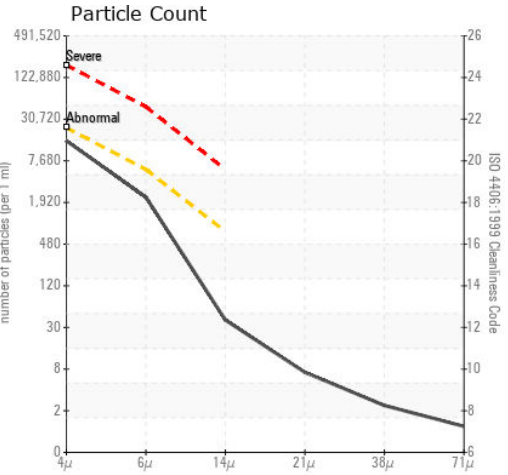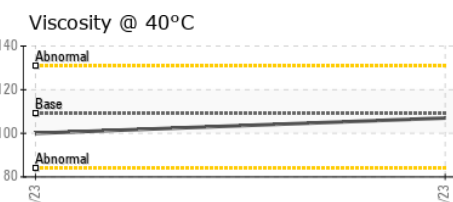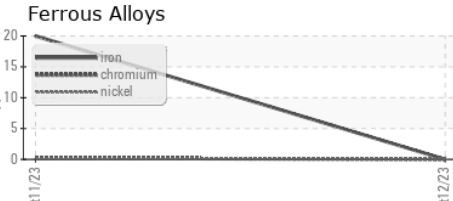

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0853961 **Received** : 20 Nov 2023  
**Lab Number** : 06013275 **Diagnosed** : 24 Nov 2023  
**Unique Number** : 10752419 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KF, KV100, PrtCount, VI )

**BASF - GIANNA CREDAROLI**  
 500 WHITE PLAINS RD  
 TARRYTOWN, NY  
 US 10591  
 Contact: GIANNA CREDAROLI  
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)