




OIL ANALYSIS REPORT

Sample Rating Trend

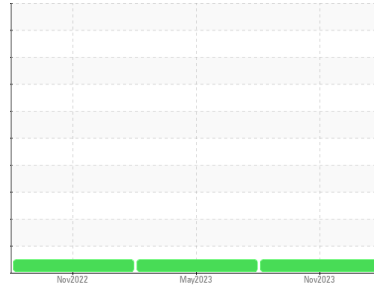

Machine Id
KAESER 8006555
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KC120541	KC05848149	KC103273
Sample Date	Client Info	15 Nov 2023	02 May 2023	17 Nov 2022
Machine Age	hrs Client Info	10194	7815	6060
Oil Age	hrs Client Info	0	0	2421
Oil Changed	Client Info	N/A	N/A	Not Changd
Sample Status		NORMAL	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>50	0	<1	<1
Chromium ppm ASTM D5185m	>10	0	0	0
Nickel ppm ASTM D5185m	>3	0	<1	0
Titanium ppm ASTM D5185m	>3	0	0	0
Silver ppm ASTM D5185m	>2	0	0	0
Aluminum ppm ASTM D5185m	>10	<1	1	<1
Lead ppm ASTM D5185m	>10	0	0	<1
Copper ppm ASTM D5185m	>50	2	9	7
Tin ppm ASTM D5185m	>10	<1	<1	0
Vanadium ppm ASTM D5185m		0	0	0
Cadmium ppm ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		0	0	0
Barium ppm ASTM D5185m	90	18	7	13
Molybdenum ppm ASTM D5185m		0	0	0
Manganese ppm ASTM D5185m		0	<1	0
Magnesium ppm ASTM D5185m	90	72	42	75
Calcium ppm ASTM D5185m	2	3	1	2
Phosphorus ppm ASTM D5185m		1	5	4
Zinc ppm ASTM D5185m		0	0	6

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>25	0	<1	3
Sodium ppm ASTM D5185m		27	14	27
Potassium ppm ASTM D5185m	>20	2	3	2
Water % ASTM D6304	>0.05	0.017	0.009	0.014
ppm Water ppm ASTM D6304	>500	178.6	90.5	145.3






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647		2804	2151	---
Particles >6µm ASTM D7647	>1300	573	613	---
Particles >14µm ASTM D7647	>80	43	44	---
Particles >21µm ASTM D7647	>20	12	6	---
Particles >38µm ASTM D7647	>4	1	0	---
Particles >71µm ASTM D7647	>3	0	0	---
Oil Cleanliness ISO 4406 (c)	>--/17/13	19/16/13	18/16/13	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045	0.4	0.31	0.43	0.33


OIL ANALYSIS REPORT

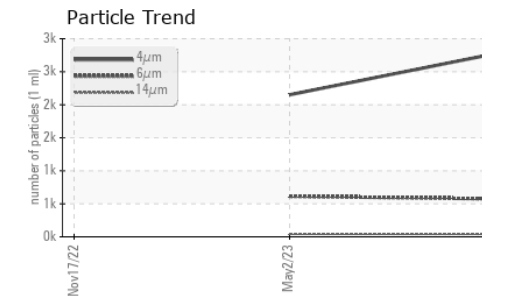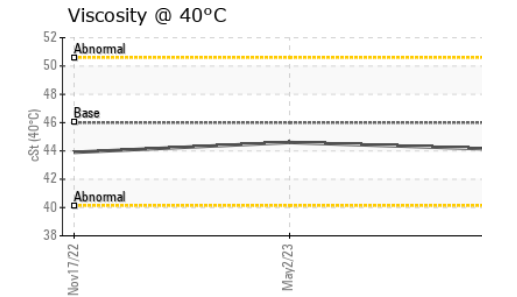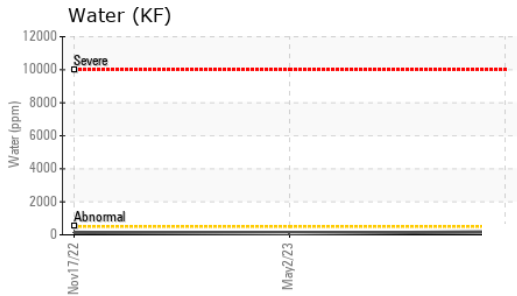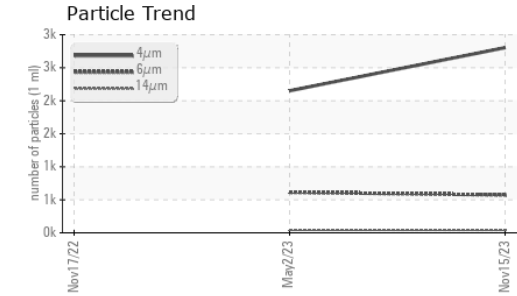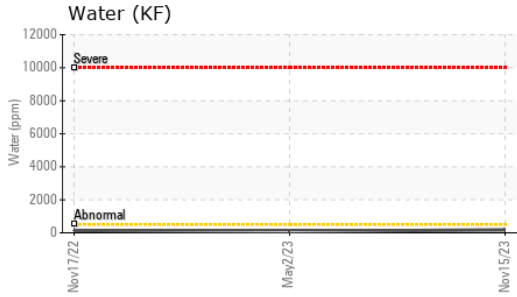





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.1	44.6 43.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

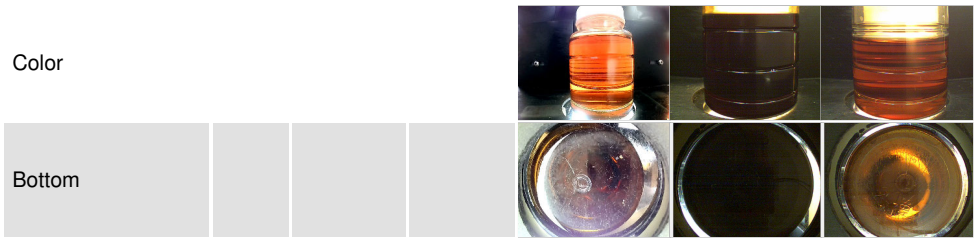

GRAPHS

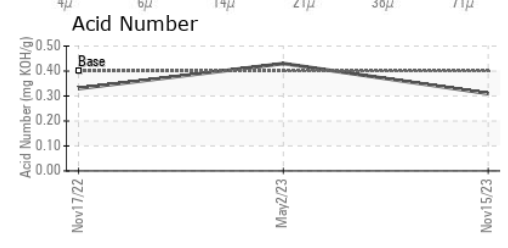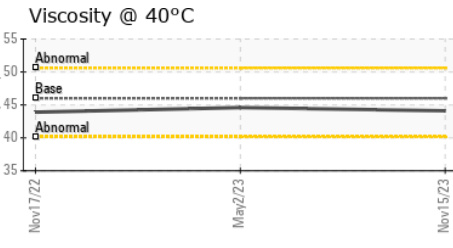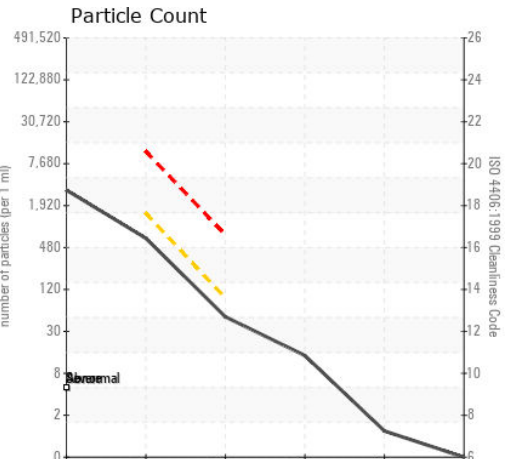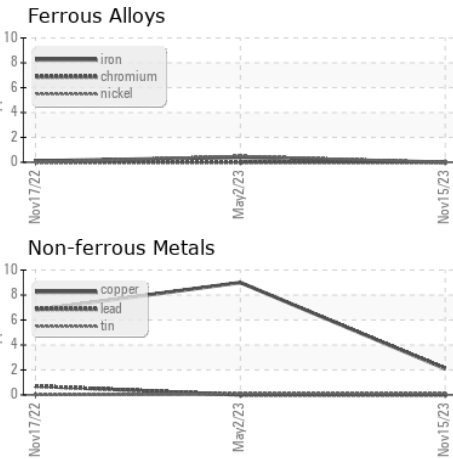

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC120541 **Received** : 20 Nov 2023
Lab Number : 06013286 **Diagnosed** : 22 Nov 2023
Unique Number : 10752430 **Diagnostician** : Don Baldrige
Test Package : IND 2

CHIP GANASSI RACING
 7777 WOODLAND DR
 INDIANAPOLIS, IN
 US 46278
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: