

PROBLEM SUMMARY


Built for a lifetime."

KAESER CSV 150 6063724 (S/N 1087)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

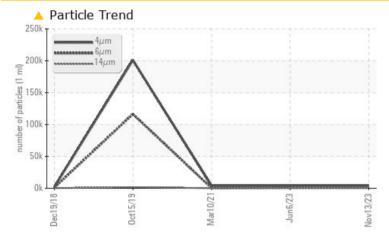

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS Sample Status ABNORMAL ATTENTION NORMAL 1221 Particles >6µm ASTM D7647 >1300 **1489** 311 Particles >14µm ASTM D7647 >80 **173 A** 89 19 Particles >21µm ASTM D7647 >20 56 24 7 Particles >38µm ASTM D7647 >4 4 1 0 **Oil Cleanliness** ISO 4406 (c) >--/17/13 🔺 19/18/15 🔺 19/17/14 15/11


Customer Id: SEDMOU Sample No.: KC111261 Lab Number: 06013289 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

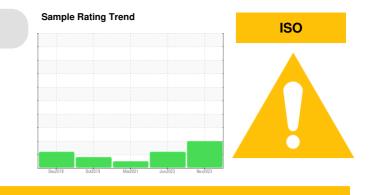

RECOMMENDED ACTIONS							
Action	Status	Date	Done By	Description			
Change Fluid			?	Oil and filter change at the time of sampling has been noted.			
Change Filter			?	Oil and filter change at the time of sampling has been noted.			

HISTORICAL DIAGNOSIS



06 Jun 2023 Diag: Don Baldridge

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.



view report

10 Mar 2021 Diag: Angela Borella



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

15 Oct 2019 Diag: Doug Bogart



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid.







OIL ANALYSIS REPORT

KAESER CSV 150 6063724 (S/N 1087)

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

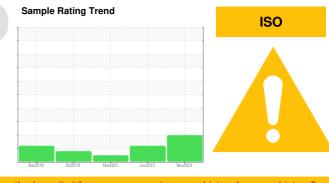


SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		KC111261	KCP53992	KC73093
Sample Date		Client Info		13 Nov 2023	06 Jun 2023	10 Mar 2021
Machine Age	hrs	Client Info		23595	20962	12121
Oil Age	hrs	Client Info		3000	4000	3000
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	<1	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	۰ <1	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		1	3	2
Tin		ASTM D5185m	>10	، <1	0	0
Antimony	ppm	ASTM D5185m	<i>></i> 10	<1 		0
Vanadium	ppm	ASTM D5185m		0	0	0
	ppm			0		
Cadmium	ppm	ASTM D5185m		U	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	102	104	126
Molybdenum	ppm	ASTM D5185m		0	0	2
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	105	99	132
Calcium	ppm	ASTM D5185m	2	4	3	3
Phosphorus	ppm	ASTM D5185m		1	2	3
Zinc	ppm	ASTM D5185m		0	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	12	15	1
Sodium	ppm	ASTM D5185m		7	15	17
Potassium	ppm	ASTM D5185m	>20	<1	2	26
Water	%	ASTM D6304	>0.05	0.011	0.026	0.019
ppm Water	ppm	ASTM D6304	>500	111.9	269.6	197.4
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4078	4472	4135
Particles >6µm		ASTM D7647	>1300	<u> </u>	1221	311
Particles >14µm		ASTM D7647	>80	A 173	<u> </u>	19
Particles >21µm		ASTM D7647	>20	<u> </u>	<u> </u>	7
Particles >38µm		ASTM D7647	>4	<u> </u>	1	0
Particles >71µm		ASTM D7647	>3	1	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 19/18/15	▲ 19/17/14	15/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.33	0.37	0.403


Contact/Location: JOSH KINN - SEDMOU



OIL ANALYSIS REPORT

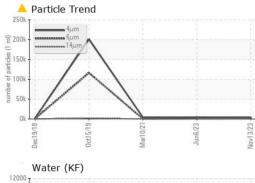




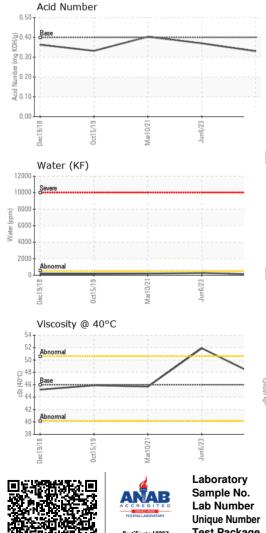

			11 1. 1			
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	47.6	51.9	45.7
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				a.		

Bottom

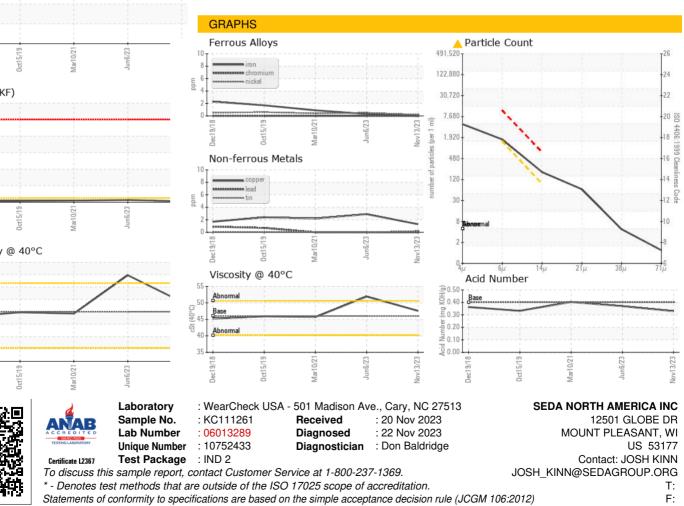

Contact/Location: JOSH KINN - SEDMOU