


## **PROBLEM SUMMARY**



Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### COMPONENT CONDITION SUMMARY

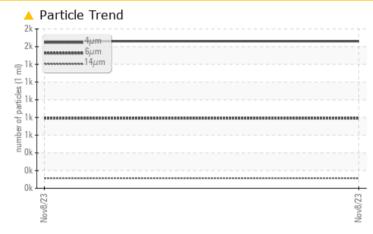

#### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS						
Sample Status			ATTENTION			
Particles >14µm	ASTM D7647	>80	🔺 114			
Particles >21µm	ASTM D7647	>20	<u> </u>			
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b>18/17/14</b>			


Customer Id: ROYFRA Sample No.: KC120556 Lab Number: 06013304 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

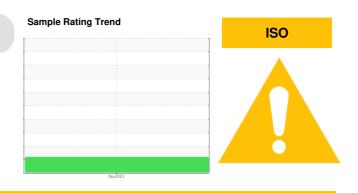


There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



### **OIL ANALYSIS REPORT**





# KAESER AS 25 7257894 (S/N 1343)

**Compressor** 

KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC120556		
Sample Date		Client Info		08 Nov 2023		
Machine Age	hrs	Client Info		11509		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m		11		
Tin	ppm	ASTM D5185m		<1		
Vanadium	ppm	ASTM D5185m	-	0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	nnm	ASTM D5185m		0		
Barium	ppm ppm	ASTM D5185m	90	0		
Molybdenum		ASTM D5185m	90	0		
Manganese	ppm ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	90	15		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m	2	1		
Zinc	ppm	ASTM D5185m		5		
-			11 11 11	-		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304		0.005		
ppm Water	ppm	ASTM D6304	>500	50.2		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1661		
Particles >6µm		ASTM D7647	>1300	790		
Particles >14µm		ASTM D7647	>80	<b>A</b> 114		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>18/17/14</b>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.31		



#### Built for a lifetime."

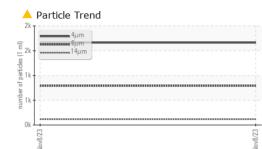

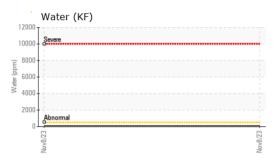

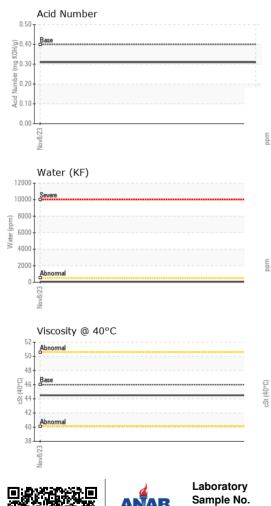

Ĕ

## **OIL ANALYSIS REPORT**

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
ppearance	scalar	*Visual	NORML	NORML		
Ddor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
/isc @ 40°C	cSt	ASTM D445	46	44.5		
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color					no image	no image
Bottom				()	no image	no image
GRAPHS Ferrous Alloys				Particle Count		
			491,52			T <sup>26</sup>
iron chromium			122,88			-24
nickel						
			30,72	D-		-22
			7,68	D-		-20 2
Nov8/23			Nov8/23. (per 1 m])			18 8
N			Nov8/23 1.921 ml) 121 ml) 121 ml)			-18 0 -18 0 -16 0 -16 0 -14 10 -14 10 -14 -14 10 -14 10 -1
Non-ferrous Metal	s		otpied 48		-	-16 g
copper			jo ja 12	- -		-14 8
tin						5
			3	J -		-12 -
				Berevenal		-10
Nov8/23	*****		Nov8/23			-8
َ Viscosity @ 40°C			Nov	0 4μ 6μ	14µ 21µ	38µ 71µ
				Acid Number		
Abnormal			10-10 HO 0.4	Base	*****	
Base			(\$/H0,5/ WH0,2 Bu) as a constant a quint of the consta			
Abnormal			- e 0.2			
- 9		*****	2 0.1	D		
53				J		23
Nov8/23			Nov8/23	Nov8/23		Nov8/23
06013304	501 Madi Received Diagnos Diagnos	d : 20   ed : 22	ary, NC 2751: Nov 2023 Nov 2023 n Baldridge	3	18	GER AND SOS 60 S 600 EAST FRANKLIN, IN US 46131 ervice Manager

Test Package : IND 2 Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

Lab Number **Unique Number** 

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F:

Contact/Location: Service Manager - ROYFRA