


PROBLEM SUMMARY

KAESER 1081713

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

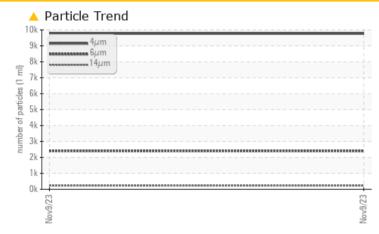

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	
Particles >6µm	ASTM D7647 >1300	<u> </u>	
Particles >14µm	ASTM D7647 >80	A 226	
Particles >21µm	ASTM D7647 >20	<u> </u>	
Oil Cleanliness	ISO 4406 (c) >/17/13	A 20/18/15	


Customer Id: GENDEL Sample No.: KCPA006111 Lab Number: 06013317 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

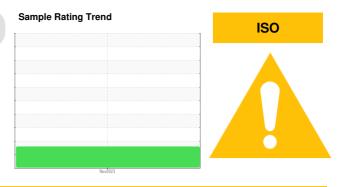


There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT





KAESER 1081713

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA006111		
Sample Date		Client Info		09 Nov 2023		
Machine Age	hrs	Client Info		56308		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	0		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	3		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	78		
Calcium	ppm	ASTM D5185m	0	3		
Phosphorus	ppm	ASTM D5185m	0	1		
Zinc	ppm	ASTM D5185m	0	0		
Sulfur	ppm	ASTM D5185m	23500	19008		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		13		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.05	0.016		
ppm Water	ppm	ASTM D6304	>500	168.9		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		9768		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	A 226		
Particles >21µm		ASTM D7647	>20	<mark>/</mark> 73		
Particles >38µm		ASTM D7647	>4	3		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	20/18/15		
on oleaniness						
FLUID DEGRADA	TION	method	limit/base	current	history1	history2




OIL ANALYSIS REPORT


method


limit/base

current

VISUAL

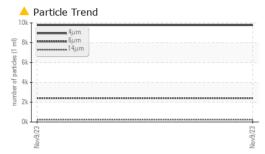

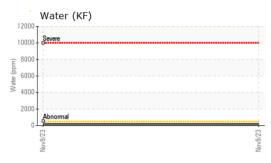

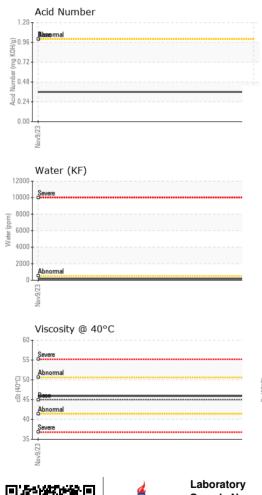

	VISUAL		method	limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
	Precipitate	scalar	*Visual	NONE	NONE		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
Nov9/23	Appearance	scalar	*Visual	NORML	NORML		
No	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.05	NEG		
	Free Water	scalar	*Visual		NEG		
	FLUID PROPERT	IES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445	45	45.9		
	SAMPLE IMAGES	6	method	limit/base	current	history1	history2
2/6voN	Color					no image	no image
	Bottom					no image	no image
	GRAPHS						
	Ferrous Alloys				Particle Count		
	10 iron			491,520	, T		T ²⁶
	o assesses chromium			122,880	-		-24
				20.720			
	2			30,720	1		-22
	0			7,680			-20
	Vov9/23			Nov9/23.			-20 -18 -16 -14 -12
	Na			EC/6vol 1.920 1.920 120 120		\$	
	Non-ferrous Metal	S		pitted 480			16
	10 copper			jo 19 120	, ,		-14
	- 6 -						
	4			30	1		-12
	2				Berevernal		10
	Nov9/23			Nov9/23			
	—			2 () 4μ 6μ	14µ 21µ	38µ 71µ
	Viscosity @ 40°C				Acid Number	i ipi	50µ 11µ
*****	60 55 Severe			(B)H0 9.96 B) 0.72 B) 0.74 B) 0.24 V 0.24 V 0.00	Basemal		
0				<u>j</u> 0.96			
-100	50 - Base 45 - Ohnormal			£ 0.72 ای	2		
ę	Autolinia		************************	-e 0.48	3-		
	40 Severe						
	35			0.00			
	Nov9/23			Nov9/23	Nov9/23		
boratory mple No. b Number ique Number st Package	: 06013317	Receiveo Diagnos Diagnos	d : 20 ed : 22 tician : Dor	ry, NC 27513 Nov 2023 Nov 2023 n Baldridge	3		A SUPPLY IN VISCONSIN S DELAVAN, W US 5311

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

historv1

historv2