

PROBLEM SUMMARY

ISO


Sample Rating Trend

Machine Id KAESER BSD 50T 5775448 (S/N 1012) Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

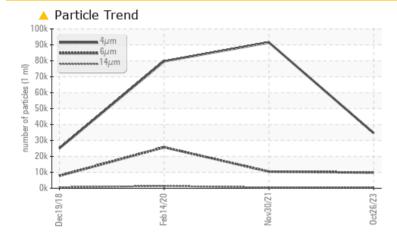

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status		ABNORMA	ABNORMAL	ABNORMAL					
Particles >6µm	ASTM D7647 >1	300 🔺 9793	▲ 10402	25740					
Particles >14µm	ASTM D7647 >8	0 🔺 535	5 07	🔺 1419					
Particles >21µm	ASTM D7647 >2	0 🔺 108	▲ 53	A 305					
Oil Cleanliness	ISO 4406 (c) >	/17/13 🔺 22/20/16	2 1/16	<u> </u>					

Customer Id: BAUSAIMN Sample No.: KCPA009130 Lab Number: 06013319 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

30 Nov 2021 Diag: Jonathan Hester

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

14 Feb 2020 Diag: Don Baldridge

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

19 Dec 2018 Diag: Jonathan Hester



We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report





OIL ANALYSIS REPORT

KAESER BSD 50T 5775448 (S/N 1012)

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009130	KCP43567	KCP20557
Sample Date		Client Info		26 Oct 2023	30 Nov 2021	14 Feb 2020
Machine Age	hrs	Client Info		5580	3481	1623
Oil Age	hrs	Client Info		0	1858	0
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	4	2
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	2	<1
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m	>50	2	3	3
Tin	ppm	ASTM D5185m	>10	- <1	0	<1
Antimony	ppm	ASTM D5185m			<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES	pp	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	6	<1
Barium	ppm	ASTM D5185m	90	5	6	11
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m	100	<1	<1	<1
Magnesium Calcium	ppm	ASTM D5185m	100	57 2	60	73 2
	ppm	ASTM D5185m ASTM D5185m	0	2	<1 3	2
Phosphorus Zinc	ppm			2	0	2
Sulfur	ppm	ASTM D5185m		_		
	ppm	ASTM D5185m	23500	19141	17244	16059
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	1	<1
Sodium	ppm	ASTM D5185m		8	18	15
Potassium	ppm	ASTM D5185m	>20	3	6	11
Water	%	ASTM D6304	>0.05	0.021	0.023	0.014
ppm Water	ppm	ASTM D6304	>500	212.9	232.3	144.7
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		34588	91514	79706
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u> </u>	<u> </u>
Particles >14µm		ASTM D7647	>80	6 535	<u> </u>	1 419
Particles >21µm		ASTM D7647	>20	<u> </u>	<u> </u>	A 305
Particles >38µm		ASTM D7647	>4	3	0	2 6
Particles >71µm		ASTM D7647	>3	1	0	<u> </u>
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 22/20/16	▲ 21/16	2 2/18
FLUID DEGRADA	TION	method	limit/base	ourropt	history1	history2
I LOID DEGINADA		motiloa	initi base	current	Thistory I	THEOLYZ

Report Id: BAUSAIMN [WUSCAR] 06013319 (Generated: 11/22/2023 20:44:32) Rev: 1

Contact/Location: Service Manager - BAUSAIMN



Î 80

(maa)

Water

(B/HOX Ê0.7 Ê 0.4 Pio 0.2

0.00

1000

600 Water (

4000

200

n

60

55

ှ 50

-73 45

40

35

40

OIL ANALYSIS REPORT

method

*Visual

*Visual

*Visua

*Visual

*Visual

*Visua

*Visual

*Visual

method

ASTM D445

method

limit/base

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

limit/base

>0.05

current

NONE

NONE

NONE

NONE

NONE

NONE


NORML

NORML

curren

NEG

NEG

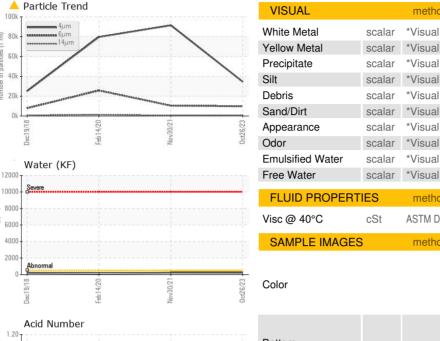



history1

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

history

NEG

NEG

history2

NONE

NONE

NONE

NONE

LIGHT

NONE

NORML


NORML

history2

NEG

NEG

Bottom

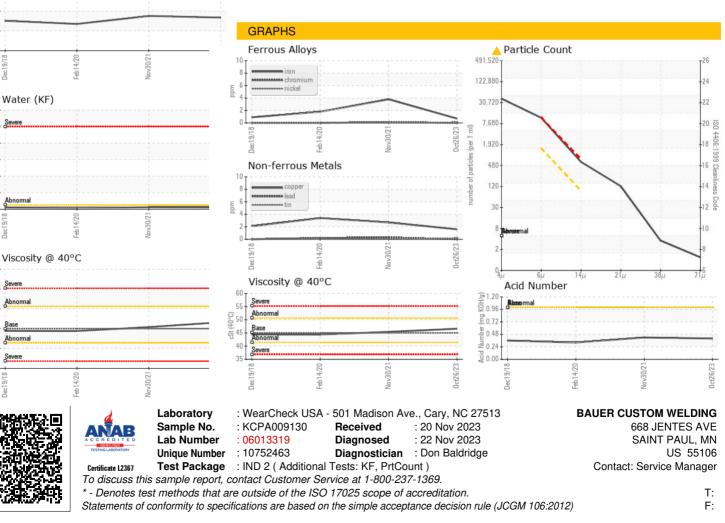

Contact/Location: Service Manager - BAUSAIMN