



PROBLEM SUMMARY

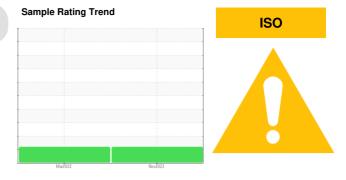

Machine Id 7336073 (S/N 1045) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

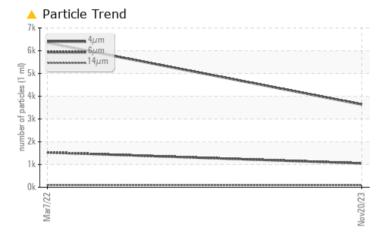

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC T	EST RESULTS				
Sample Status			ATTENTION	ATTENTION	
Particles >14µm	ASTM D7647	>80	<u> </u>	9 2	
Particles >21µm	ASTM D7647	>20	<u> </u>	a 26	
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u> </u>	1 8/14	

Customer Id: BEJVIS Sample No.: KCPA007311 Lab Number: 06013362 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

07 Mar 2022 Diag: Don Baldridge



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id 7336073 (S/N 1045) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA007311	KCP41097	
Sample Date		Client Info		20 Nov 2023	07 Mar 2022	
Machine Age	hrs	Client Info		6980	1085	
Oil Age	hrs	Client Info		0	2000	
Oil Changed		Client Info		N/A	Changed	
Sample Status				ATTENTION	ATTENTION	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>50	5	1	
Tin	ppm	ASTM D5185m	>10	0	0	
Vanadium	ppm	ASTM D5185m	210	0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	0	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	100	17	63	
Calcium	ppm	ASTM D5185m	0	1	<1	
Phosphorus	ppm	ASTM D5185m	0	1	6	
Zinc	ppm	ASTM D5185m		70	6	
Sulfur	ppm		23500	19079	15762	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	<1	
Sodium	ppm	ASTM D5185m		2	7	
Potassium	ppm	ASTM D5185m	>20	0	12	
Water	%	ASTM D6304	>0.05	0.008	0.017	
ppm Water	ppm	ASTM D6304	>500	89.6	173.7	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3635	6339	
Particles >6µm		ASTM D7647	>1300	1052	1 530	
Particles >14µm		ASTM D7647	>80	<mark>/</mark> 85	9 2	
Particles >21µm		ASTM D7647	>20	<u> </u>	<u> </u>	
Particles >38µm		ASTM D7647	>4	0	2	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/14	▲ 18/14	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2




OIL ANALYSIS REPORT

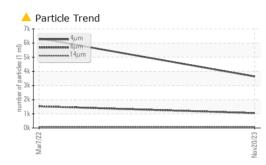



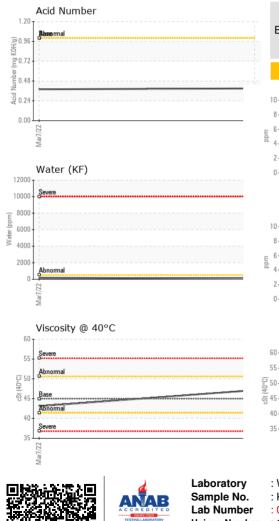

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	47.15	43.1	
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color				•		no image
Bottom						no image
GRAPHS						
Ferrous Alloys				Particle Count		
			491,520	Ι		1 ²⁶
B Iron chromium			122,880			-24
6 nickel						
4			30,720	1		-22
			7,680	· · ·		-20
Mar7/22			0/23 1 ml)			
Mar			Nov20/23 s (per 1 ml			-18
Non-ferrous Meta	ls				· · · · · · · · · · · · · · · · · · ·	-16
			E2/02/04 ml) 1.920 480 120 120			-18 -16 -14
8 - copper				Ī		-14
6 tin			30	-		-12
4			8		1	-10
2				Béreve mal		
0			2 25	+		8
Mar7/22			Nov20/23			
Viscosity @ 40°C				ہوں۔ Acid Number	14μ 21μ	38µ 71µ
⁰ T .			1.20			
			¥H 0.96	Base rmal		
5 - Severe			20.72			
			<u>E</u> U.72	i.		
Abnormal Base Abrormal			<u>د</u> 0.72 ق 0.48			
			(b)HO3 0.96 HO3 0.96 June 4 HO3 0.72 Hun 0.48 Po 24 Ho3 0.24 Ho3 0.24	-		

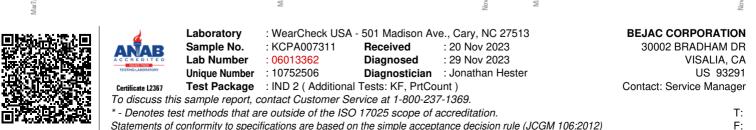

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - BEJVIS