

# **PROBLEM SUMMARY**

Sample Rating Trend

**WATER** 


# KAESER 7965386


Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

#### **COMPONENT CONDITION SUMMARY**

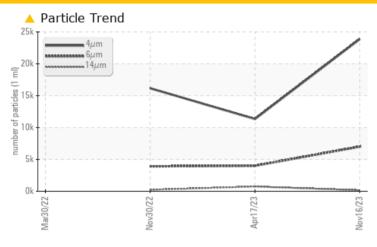

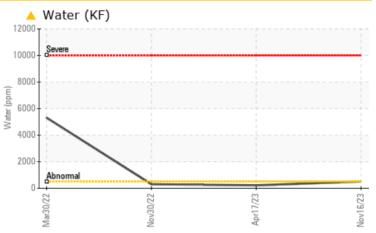

#### RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL			
Water	%	ASTM D6304	>0.05	<b>△</b> 0.051	0.022	0.030			
ppm Water	ppm	ASTM D6304	>500	<b>510.6</b>	221.0	304.7			
Particles >6µm		ASTM D7647	>1300	<b>^</b> 7009	<b>4002</b>	<b>△</b> 3910			
Particles >14µm		ASTM D7647	>80	<b>161</b>	<u> </u>	<u>234</u>			
Particles >21µm		ASTM D7647	>20	<b>A</b> 28	<b>△</b> 310	<b>△</b> 56			
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>22/20/15</b>	21/19/17	A 21/19/15			

Customer Id: AMAMAD Sample No.: KCPA011296 Lab Number: 06013382 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

#### **RECOMMENDED ACTIONS**

Action	Status	Date	Done By	Description
Change Filter			?	We recommend you service the filters on this component.

#### HISTORICAL DIAGNOSIS

#### 17 Apr 2023 Diag: Jonathan Hester

ISO



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 30 Nov 2022 Diag: Don Baldridge

ISO



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 30 Mar 2022 Diag: Don Baldridge

WATER



The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. There is a moderate concentration of water present in the oil. The AN level is acceptable for this fluid.





# **OIL ANALYSIS REPORT**

Sample Rating Trend



**WATER** 



**KAESER 7965386** 

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

### **DIAGNOSIS**

#### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil. There is a trace of moisture present in the


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Mar202	2 Nov2022	Apr2023 No	v2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA011296	KCPA001140	KCP47775D
Sample Date		Client Info		16 Nov 2023	17 Apr 2023	30 Nov 2022
Machine Age	hrs	Client Info		7200	7195	6091
Oil Age	hrs	Client Info		0	0	6091
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	0	<1	9
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	79	47	19
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	100	89	81	68
Calcium	ppm	ASTM D5185m	0	3	2	0
Phosphorus	ppm	ASTM D5185m	0	1	3	30
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	23500	18427	19711	23551
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		4	15	21
Potassium	ppm	ASTM D5185m		0	<1	2
Water	%	ASTM D6304	>0.05	<u> </u>	0.022	0.030
ppm Water	ppm	ASTM D6304	>500	<u>▲</u> 510.6	221.0	304.7
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		23875	11344	16168
Particles >6µm		ASTM D7647	>1300	<b>^</b> 7009	<u>4002</u>	<b>△</b> 3910
Particles >14μm		ASTM D7647	>80	<u> </u>	<u> 747</u>	<u>^</u> 234
Particles >21µm		ASTM D7647	>20	<u>^</u> 28	<b>△</b> 310	<u></u> ▲ 56
Particles >38μm		ASTM D7647	>4	1	<u></u> 5	<u> </u>
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>22/20/15</u>	<u>\$\text{\Delta}\$ 21/19/17</u>	<u></u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.37	0.32	0.36



## **OIL ANALYSIS REPORT**

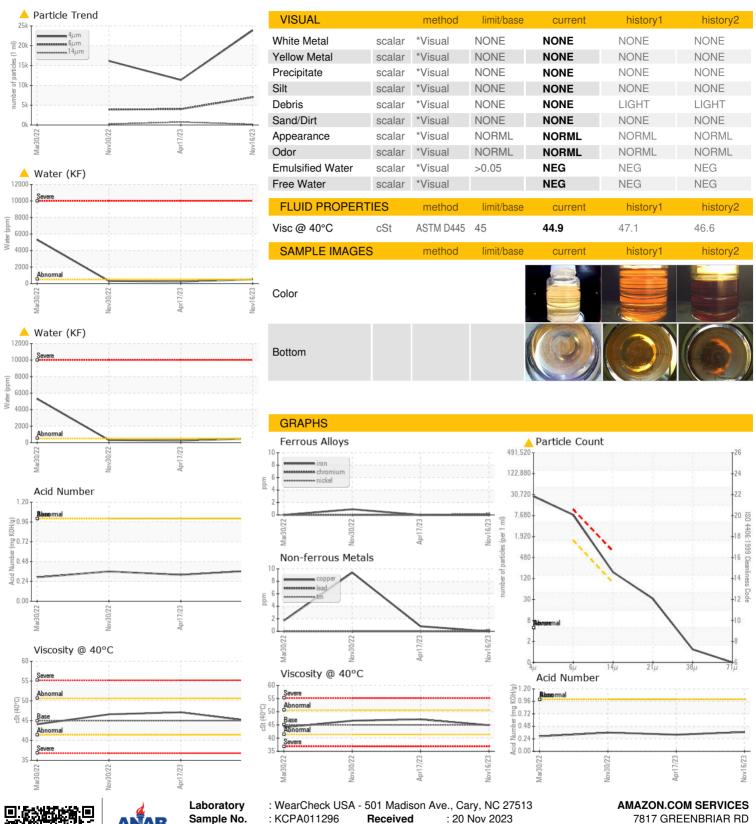





Sample No. Lab Number **Unique Number** 

: 10752526

: KCPA011296 : 06013382

Received Diagnosed

: 22 Nov 2023 Diagnostician : Don Baldridge

Test Package : IND 2 ( Additional Tests: KF, PrtCount ) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F:

MADISON, AL US 35756

Contact: Service Manager