




OIL ANALYSIS REPORT

Sample Rating Trend

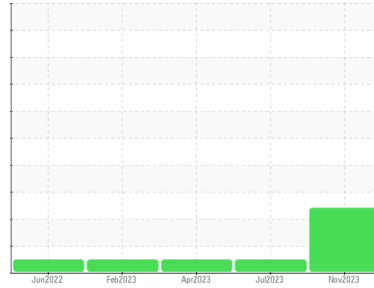

ISO



Machine Id
35172
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- QTS)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0012119	KL0012012	KLM2339432
Sample Date	Client Info		10 Nov 2023	25 Jul 2023	10 Apr 2023
Machine Age	mls	Client Info	44346	34547	0
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	39	28	20
Chromium	ppm	ASTM D5185m >20	2	1	<1
Nickel	ppm	ASTM D5185m >4	<1	0	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	<1
Aluminum	ppm	ASTM D5185m >20	10	8	5
Lead	ppm	ASTM D5185m >40	0	0	<1
Copper	ppm	ASTM D5185m >330	56	58	96
Tin	ppm	ASTM D5185m >15	2	2	2
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	15	31	62
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	54	55	53
Manganese	ppm	ASTM D5185m	1	1	1
Magnesium	ppm	ASTM D5185m	997	1050	1063
Calcium	ppm	ASTM D5185m	1148	1151	1097
Phosphorus	ppm	ASTM D5185m	976	978	1009
Zinc	ppm	ASTM D5185m	1204	1222	1249
Sulfur	ppm	ASTM D5185m	2556	3329	3811

CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	9	6	6
Sodium	ppm	ASTM D5185m	4	4	2
Potassium	ppm	ASTM D5185m >20	15	15	13
Fuel	%	ASTM D3524 >5	<1.0	0.3	<1.0

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1	0.6	0.4
Nitration	Abs/cm	*ASTM D7624 >20	12.3	9.9	8.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	24.6	21.7	21.7



OIL ANALYSIS REPORT

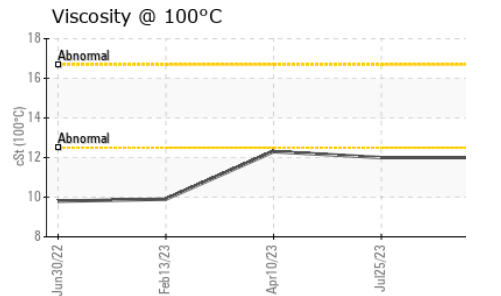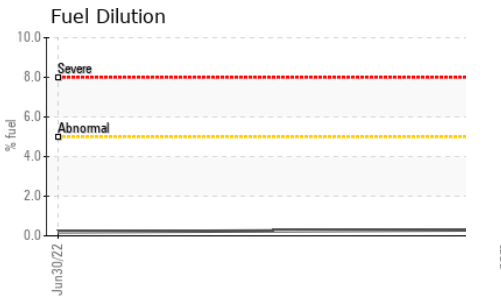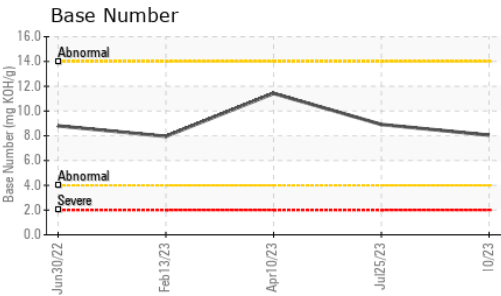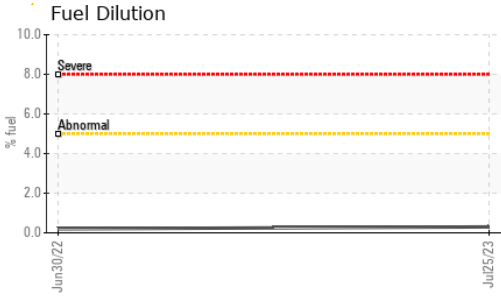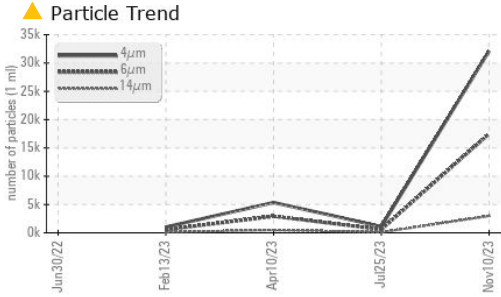

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		32119	1096	5350
Particles >6µm	ASTM D7647	>5000	▲ 17497	597	2915
Particles >14µm	ASTM D7647	>640	▲ 2978	102	496
Particles >21µm	ASTM D7647	>160	▲ 1003	34	167
Particles >38µm	ASTM D7647	>40	▲ 155	5	26
Particles >71µm	ASTM D7647	>10	▲ 16	1	3
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ 21/19	16/14	19/16


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	23.7	18.8	17.3
Base Number (BN)	mg KOH/g ASTM D2896		8.05	8.91	11.42

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		12.0	12.0	12.3

GRAPHS


Ferrous Alloys

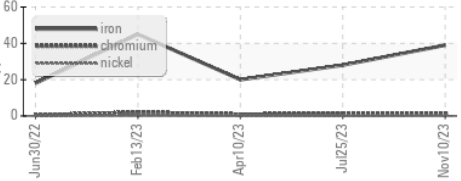


Non-ferrous Metals

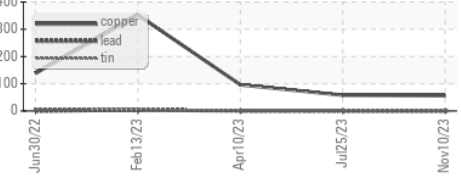


Viscosity @ 100°C

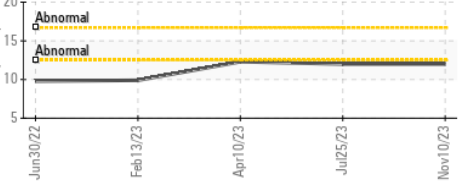

Particle Count

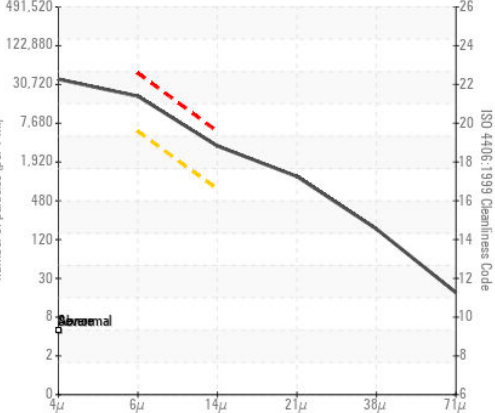

Base Number

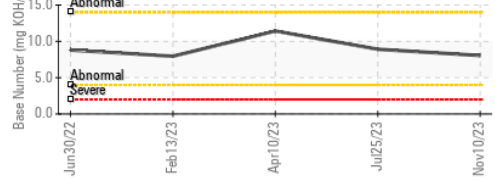

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0012119 **Received** : 20 Nov 2023
Lab Number : 06013427 **Diagnosed** : 23 Nov 2023
Unique Number : 10752571 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel, PrtCount)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)