




OIL ANALYSIS REPORT

Sample Rating Trend

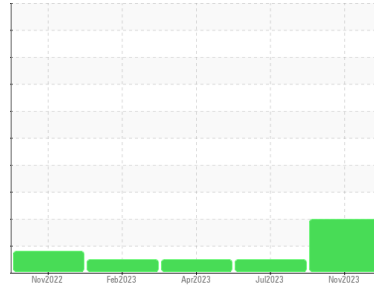

ISO



Machine Id
35171
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- QTS)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	KL0012118	KL0012011	KLM2339379	
Sample Date	Client Info	10 Nov 2023	25 Jul 2023	08 Apr 2023	
Machine Age	mls	Client Info	42684	32943	0
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A	
Sample Status		ABNORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	52	40	28
Chromium	ppm	ASTM D5185m	>20	2	2	1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	10	8	5
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	52	53	101
Tin	ppm	ASTM D5185m	>15	2	1	1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		16	28	58
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		50	53	50
Manganese	ppm	ASTM D5185m		2	1	1
Magnesium	ppm	ASTM D5185m		987	1042	1040
Calcium	ppm	ASTM D5185m		1226	1251	1190
Phosphorus	ppm	ASTM D5185m		985	990	1004
Zinc	ppm	ASTM D5185m		1221	1240	1245
Sulfur	ppm	ASTM D5185m		2641	3351	3793

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	9	7	6
Sodium	ppm	ASTM D5185m		5	4	2
Potassium	ppm	ASTM D5185m	>20	19	18	17
Fuel	%	ASTM D3524	>5	<1.0	0.3	0.3


INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	0.9	0.6	0.4
Nitration	Abs/cm	*ASTM D7624	>20	11.0	10.4	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	22.1	21.7




OIL ANALYSIS REPORT

Particle Trend

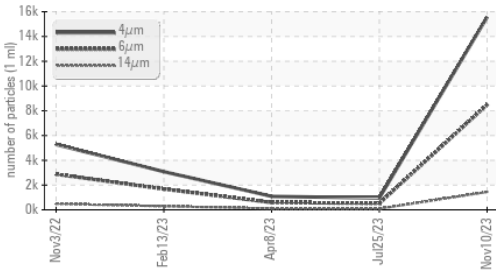


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		15564	957	1087
Particles >6µm	ASTM D7647	>5000	▲ 8478	521	592
Particles >14µm	ASTM D7647	>640	▲ 1443	89	101
Particles >21µm	ASTM D7647	>160	▲ 486	30	34
Particles >38µm	ASTM D7647	>40	▲ 75	5	5
Particles >71µm	ASTM D7647	>10	8	0	1
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ 20/18	16/14	16/14

Fuel Dilution

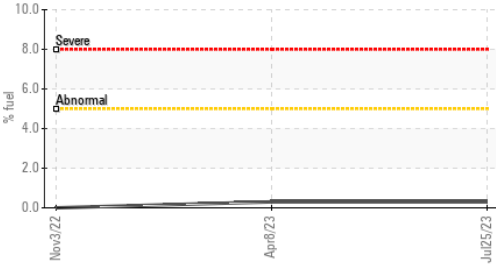


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	21.4	19.9	17.4
Base Number (BN)	mg KOH/g ASTM D2896		7.58	10.07	12.54

Base Number

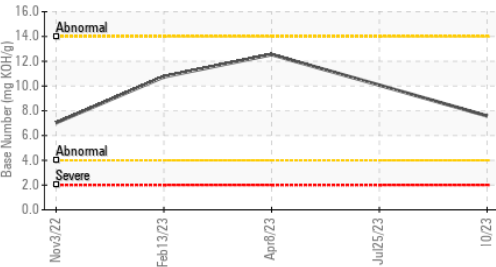

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG


Viscosity @ 100°C

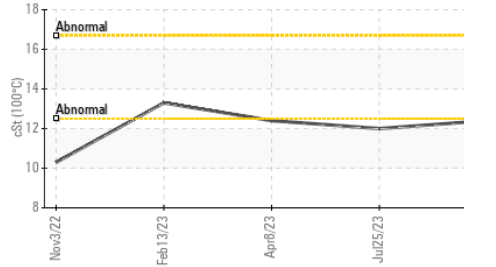


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		12.4	12.0	12.4

GRAPHS


Ferrous Alloys

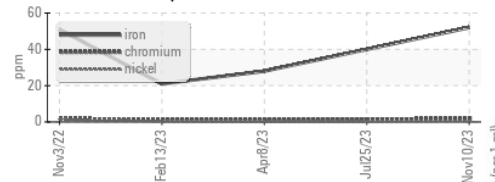


Non-ferrous Metals

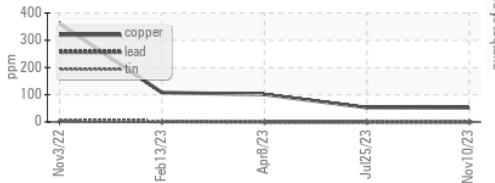


Particle Count

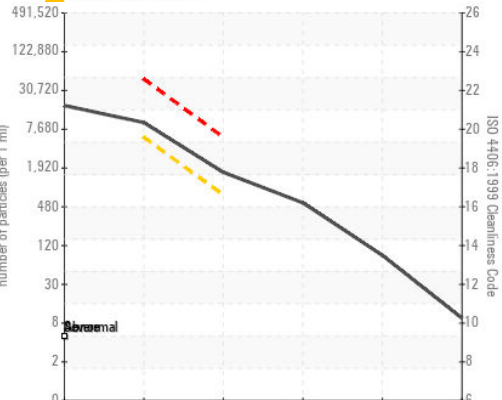


Fuel Dilution

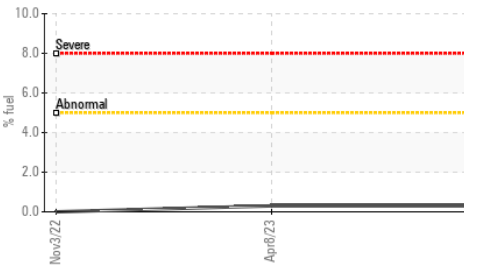

Viscosity @ 100°C

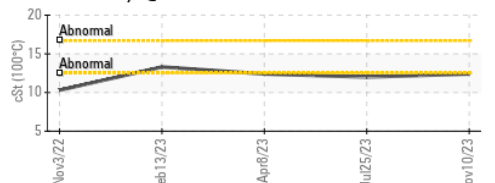

Base Number

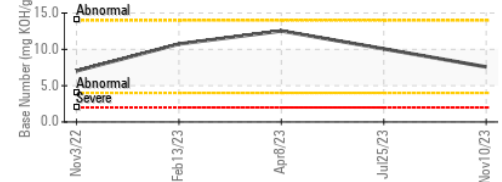

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0012118 **Received** : 20 Nov 2023
Lab Number : 06013428 **Diagnosed** : 23 Nov 2023
Unique Number : 10752572 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F: