




OIL ANALYSIS REPORT

Sample Rating Trend

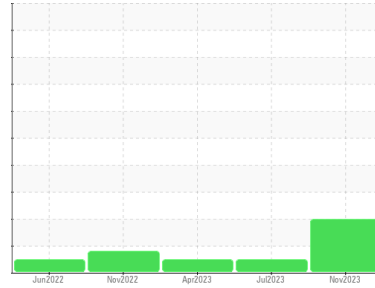

ISO



Machine Id
35166
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- QTS)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0012107	KL0012010	KLM2339323
Sample Date	Client Info		10 Nov 2023	25 Jul 2023	07 Apr 2023
Machine Age	mls	Client Info	48796	37906	31039
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ATTENTION	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	81	80	69
Chromium	ppm	ASTM D5185m >20	3	3	3
Nickel	ppm	ASTM D5185m >4	<1	<1	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >3	<1	<1	<1
Aluminum	ppm	ASTM D5185m >20	23	27	21
Lead	ppm	ASTM D5185m >40	0	0	0
Copper	ppm	ASTM D5185m >330	273	364	361
Tin	ppm	ASTM D5185m >15	4	4	4
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	13	14	25
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	24	14	14
Manganese	ppm	ASTM D5185m	3	3	3
Magnesium	ppm	ASTM D5185m	706	849	865
Calcium	ppm	ASTM D5185m	1485	1395	1377
Phosphorus	ppm	ASTM D5185m	856	806	813
Zinc	ppm	ASTM D5185m	993	950	974
Sulfur	ppm	ASTM D5185m	2468	3030	3264

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	9	10	10
Sodium	ppm	ASTM D5185m	8	11	7
Potassium	ppm	ASTM D5185m >20	44	54	52
Fuel	%	ASTM D3524 >5	<1.0	0.2	<1.0


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.3	1.1	1
Nitration	Abs/cm	*ASTM D7624 >20	13.6	12.6	12.7
Sulfation	Abs./1mm	*ASTM D7415 >30	26.5	24.8	24.3




OIL ANALYSIS REPORT

▲ Particle Trend

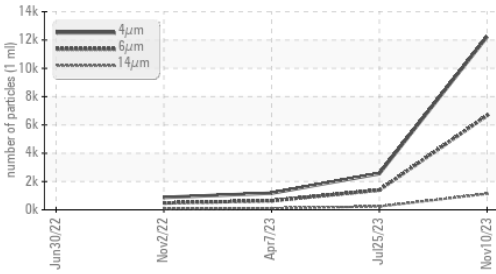


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		12232	2558	1175
Particles >6µm	ASTM D7647	>5000	▲ 6663	1393	640
Particles >14µm	ASTM D7647	>640	▲ 1134	237	109
Particles >21µm	ASTM D7647	>160	▲ 382	80	37
Particles >38µm	ASTM D7647	>40	▲ 59	12	6
Particles >71µm	ASTM D7647	>10	6	1	1
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ 20/17	18/15	16/14

Fuel Dilution

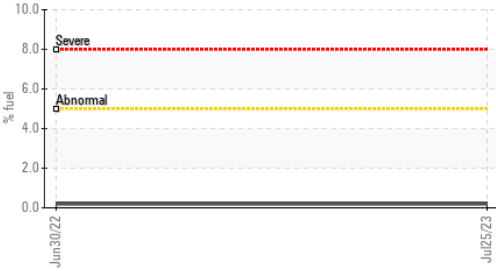

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	27.0	24.2	22.4
Base Number (BN)	mg KOH/g ASTM D2896		6.88	8.67	10.15


Base Number

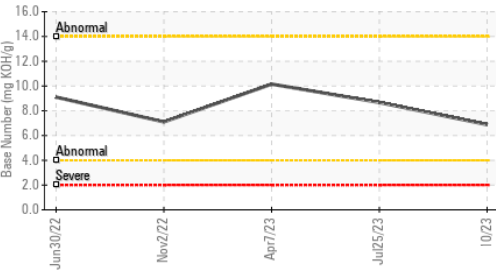

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		11.6	10.9	10.9

Fuel Dilution

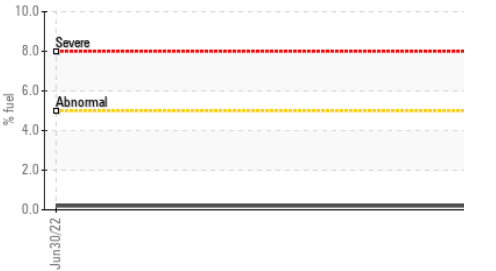


GRAPHS


Ferrous Alloys

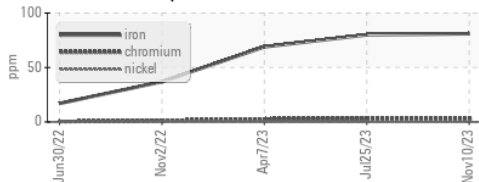


Non-ferrous Metals

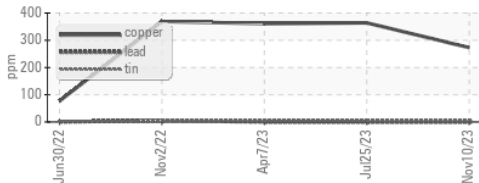


▲ Particle Count

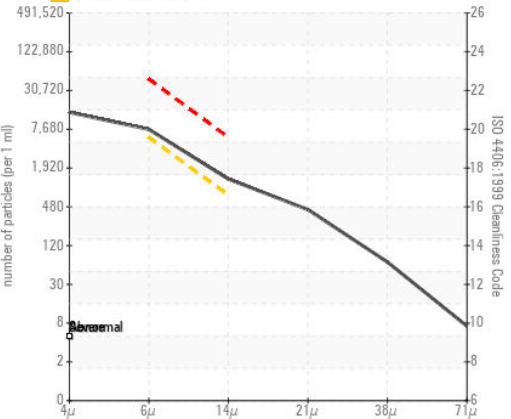


Viscosity @ 100°C

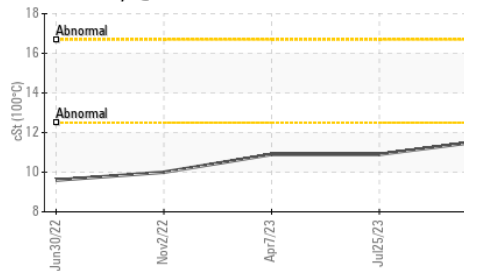

Viscosity @ 100°C

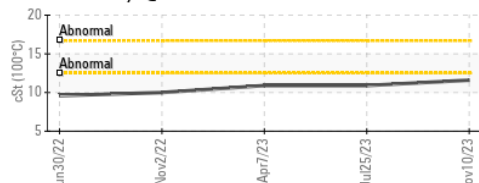

Base Number

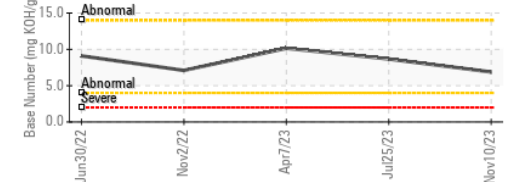

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0012107 **Received** : 20 Nov 2023
Lab Number : 06013429 **Diagnosed** : 23 Nov 2023
Unique Number : 10752573 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel, PrtCount)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)