




OIL ANALYSIS REPORT

Sample Rating Trend

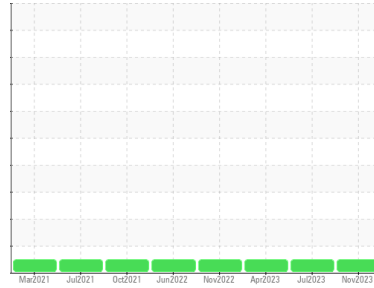

NORMAL



Machine Id
FREIGHTLINER 35159

Component
Diesel Engine

Fluid
NOT GIVEN (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KL0012106	KL0012046	KLM2339384
Sample Date	Client Info			10 Nov 2023	25 Jul 2023	08 Apr 2023
Machine Age	mls	Client Info		159022	152002	148743
Oil Age	mls	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>65	25	19	15
Chromium	ppm	ASTM D5185m	>5	1	<1	<1
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>5	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>35	4	3	<1
Lead	ppm	ASTM D5185m	>10	1	0	0
Copper	ppm	ASTM D5185m	>180	11	10	6
Tin	ppm	ASTM D5185m	>8	1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		31	63	97
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		51	51	50
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		974	881	899
Calcium	ppm	ASTM D5185m		1416	1349	1321
Phosphorus	ppm	ASTM D5185m		1121	1045	1047
Zinc	ppm	ASTM D5185m		1428	1270	1283
Sulfur	ppm	ASTM D5185m		3770	4097	4218

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	11	7	7
Sodium	ppm	ASTM D5185m		8	7	5
Potassium	ppm	ASTM D5185m	>20	7	3	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.8	0.6	0.5
Nitration	Abs/cm	*ASTM D7624	>20	9.0	7.9	7.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	21.1	21.1



OIL ANALYSIS REPORT

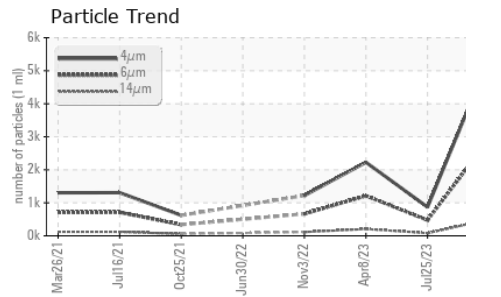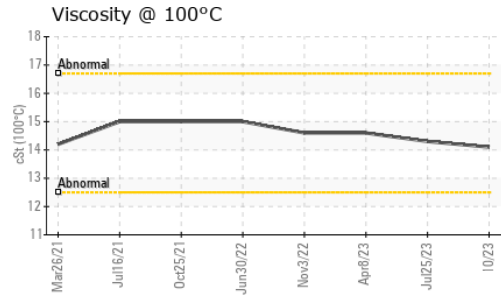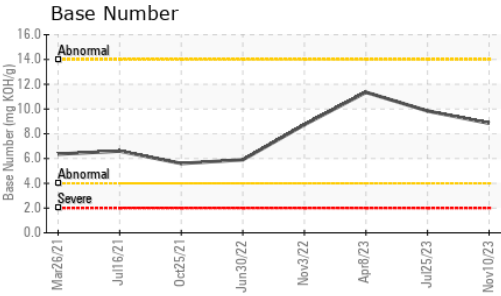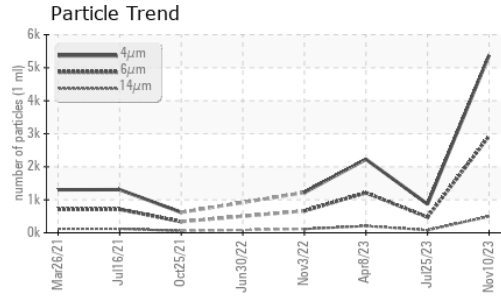






FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		5376	870	2227
Particles >6µm	ASTM D7647	>5000	2929	474	1213
Particles >14µm	ASTM D7647	>640	498	81	206
Particles >21µm	ASTM D7647	>160	168	27	70
Particles >38µm	ASTM D7647	>40	26	4	11
Particles >71µm	ASTM D7647	>10	3	0	1
Oil Cleanliness	ISO 4406 (c)	>19/16	19/16	16/14	17/15

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.1	15.7	14.9
Base Number (BN)	mg KOH/g	ASTM D2896		8.85	9.84	11.35

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.1	14.3	14.6

GRAPHS

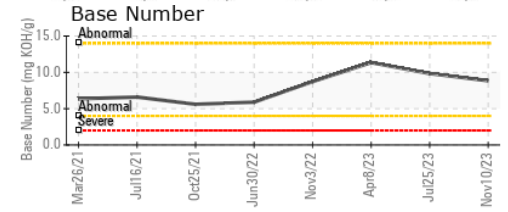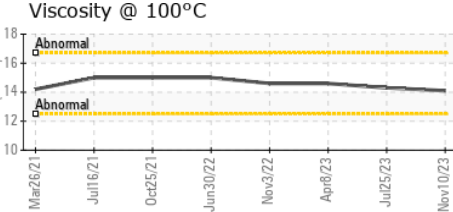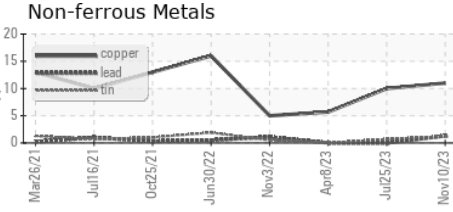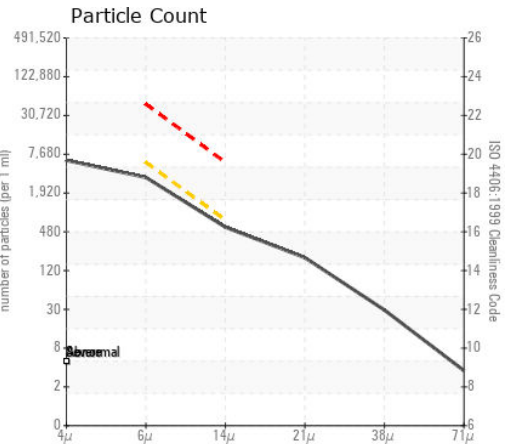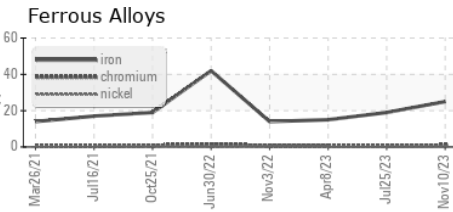

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0012106 **Received** : 20 Nov 2023
Lab Number : 06013430 **Diagnosed** : 23 Nov 2023
Unique Number : 10752574 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: PrtCount)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)